

Product data sheet

Characteristics

XZCPV1041L5

pre-wired connectors XZ - elbowed female - M8
- 4 pins - cable PVC 5m

Product availability: Stock - Normally stocked in distribution facility



Main

| | |
|------------------------------------|----------------------|
| Accessory / separate part category | Cabling accessory |
| Accessory / separate part type | Pre-wired connectors |
| Series name | General purpose |

Complementary

| | |
|--------------------------------|-------------------------------------|
| Electrical connection | Elbowed female connector M8, 4 pins |
| Cable connector fixing | Screw-on |
| Collar material | Metal |
| Status LED | Without |
| Cable length | 16.40 ft (5 m) |
| Cable outer diameter | 0.18 in (4.6 mm) |
| Cable composition | 4 x 0.25 mm ² |
| Wire insulation material | PVC |
| [Ue] rated operational voltage | 60 V AC 75 V DC |
| Line Rated Current | 3 A |
| Contact resistance | 5000 µOhm |
| Minimum insulating resistance | 1 GΩ |
| Product weight | 0.43 lb(US) (0.195 kg) |

Environment

| | |
|---------------------------------------|-----------------------------------|
| IP degree of protection | IP67 IP65 |
| Product certifications | CULus |
| Ambient air temperature for operation | -13...176 °F (-25...80 °C) static |
| Ambient air temperature for storage | -13...176 °F (-25...80 °C) |

Ordering and shipping details

| | |
|---------------------|------------------------|
| Category | 22483 - MACHINE CABLES |
| Discount Schedule | DS3 |
| GTIN | 00785901456605 |
| Package weight(Lbs) | 0.17 kg (0.38 lb(US)) |
| Returnability | Yes |
| Country of origin | DE |


Offer Sustainability

| | |
|----------------------------|--|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |

Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|


Dimensions

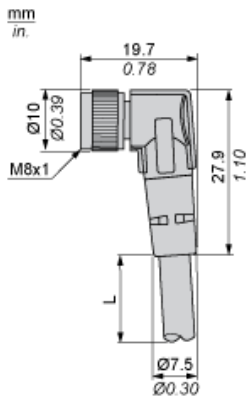

L : Length of cable

Connections and Schemes

Connector



BN : Brown
BK : Black
BU : Blue
WH : White