


Product availability: Stock - Normally stocked in distribution facility

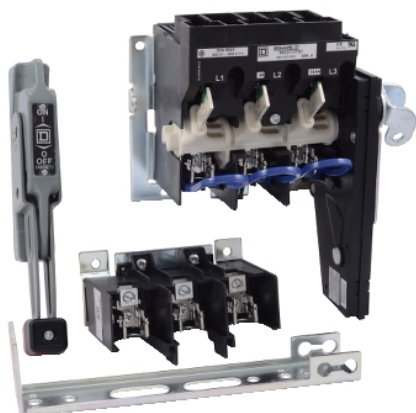

### Main

Range	9422T
Product	Disconnect Switch
Disconnect Type	Fusible disconnect switch

### Complementary

Mounting Type	Flange rod variable depth
Current Rating	100 A
Horsepower Rating	25 Hp 200 V AC 30 Hp 230 V AC 60 Hp 460 V AC 75 Hp 575 V AC 20 hp 250 V DC
Fuse Rating	100 A 250/600 V
Handle Type	6 in handle included NEMA 1/3/3R/4 enclosures sheet steel
Fuse Type	R H K J

### Environment

Certifications	UL recognized CSA
----------------	----------------------

### Ordering and shipping details

Category	21732 - 9422
Discount Schedule	CP1
GTIN	00785901872276
Package weight(Lbs)	4.42 kg (9.74 lb(US))
Returnability	Yes
Country of origin	MX

### Offer Sustainability

REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

---

Warranty

18 months

---