



Product availability: Stock - Normally stocked in distribution facility



Main

Range	Linergy
Product name	FT
Device short name	GV2G
Product or component type	Terminal block
Accessory / separate part category	Connection accessory
Poles description	3P
Range compatibility	TeSys GV2 TeSys D TeSys K TeSys U

Complementary

[Ie] rated operational current	63 A
Mounting location	Top
IP degree of protection	IP20 IEC 60529
[Ui] rated insulation voltage	690 V IEC 60947-1
Connections - terminals	Screw clamp terminals 1 solid AWG 4 Screw clamp terminals 1 0.00...0.02 in ² (1.5...16 mm ²) flexible with cable end Screw clamp terminals 1 0.00...0.02 in ² (1.5...16 mm ²) flexible without cable end Screw clamp terminals 1 0.00...0.04 in ² (1.5...25 mm ²) solid Screw clamp terminals 2 0.00...0.01 in ² (1.5...4 mm ²) flexible with cable end Screw clamp terminals 2 0.00...0.01 in ² (1.5...6 mm ²) solid Screw clamp terminals 2 0.00...0.01 in ² (2.5...4 mm ²) flexible without cable end Screw clamp terminals 1 flexible AWG 4
Tightening torque	15.05 Lbf.in (1.7 N.m) screw clamp terminals 19.47 lbf.in (2.2 N.m) connector
Net weight	0.25 lb(US) (0.115 kg)

Ordering and shipping details

Category	22367 - MANUAL STR PROTECTOR - GV2
Discount Schedule	I11
GTIN	00785901808350
Package weight(Lbs)	0.12 kg (0.27 lb(US))
Returnability	Yes
Country of origin	RO

Offer Sustainability


Sustainable offer status	Green Premium product
RECh Regulation	RECh Declaration
RECh free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS Declaration

Environmental Disclosure	Product Environmental Profile
Circularity Profile	No need of specific recycling operations

Contractual warranty

Warranty	18 months
----------	-----------

Sets of Busbars GV2G445, GV2G454, GV2G472, with Terminal Block GV2G05

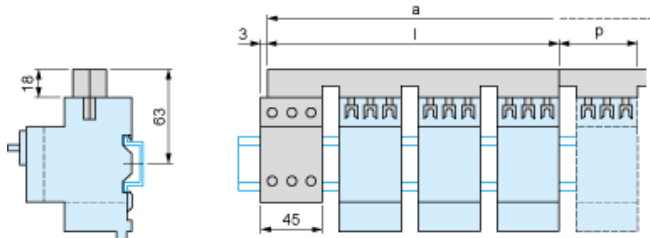

	l	p			
GV2G445 (4 x 45 mm)	179	45			
GV2G454 (4 x 54 mm)	206	54			
GV2G472 (4 x 72 mm)	260	72			

Number of tap-offs	a			
	5	6	7	8
GV2G445	224	269	314	359
GV2G454	260	314	368	422
GV2G472	332	404	476	548