


# Product data sheet

## Characteristics

# 8810SFO4V02S

Two Speed Starter, Size 4, 3-Pole, Melting Alloy OLR, Open, 120/110V 60/50Hz

Product availability: Non-Stock - Not normally stocked in distribution facility

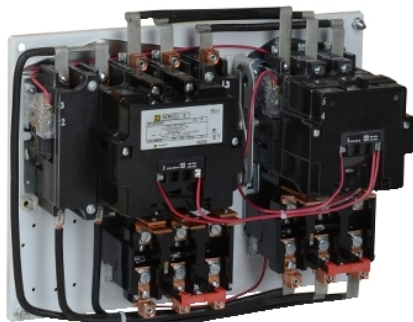

### Main

|                           |         |
|---------------------------|---------|
| Product or component type | Starter |
| Range of product          | Type S  |

### Complementary

|                                    |                                                                                    |
|------------------------------------|------------------------------------------------------------------------------------|
| Control circuit                    | Separate control circuit                                                           |
| Control type                       | Without                                                                            |
| NEMA degree of protection          | Not rated (open device)                                                            |
| Auxiliary contact composition      | Without                                                                            |
| Maximum Horse Power Rating         | 40 Hp 200 V AC, 3 phase<br>50 Hp 230 V AC, 3 phase<br>100 hp 460/575 V AC, 3 phase |
| Poles description                  | 3P                                                                                 |
| Maximum operating voltage          | 600 V AC                                                                           |
| NEMA size                          | 4                                                                                  |
| [Uc] control circuit voltage       | 120 V AC 60 Hz<br>110 V AC 50 Hz                                                   |
| Local signalling                   | Without pilot light                                                                |
| Motor starter type                 | 2 speed                                                                            |
| Electrical connection              | Lugs                                                                               |
| Thermal overload type              | Melting alloy                                                                      |
| Number of thermal units required   | 6                                                                                  |
| Asynchronous motor control profile | Constant/variable torque                                                           |
| Maximum operating current          | 135 A                                                                              |


### Environment

|                        |                                                             |
|------------------------|-------------------------------------------------------------|
| Product certifications | UL listed file E78351 CCN NLDX<br>CSA LR60905 class 3211 04 |
|------------------------|-------------------------------------------------------------|

### Ordering and shipping details

|                     |                      |
|---------------------|----------------------|
| Category            | 21302 - 8810,11,12 S |
| Discount Schedule   | CP1                  |
| Package weight(Lbs) | 35.38 kg (78 lb(US)) |
| Returnability       | No                   |
| Country of origin   | MX                   |

## Offer Sustainability

|                           |                                                                                                                                                                                                                                                                       |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a> |
| EU RoHS Directive         | Not compliant                                                                                                                                                                                                                                                         |
| China RoHS Regulation     |  <a href="#">China RoHS Declaration</a>                                                                                                                                              |

## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|