

# Product data sheet

## Characteristics

# XZCPV1865L2

pre-wired connectors XZ - straight female -  
1/2"20 UNF - 3 pins - cable PVC 2m

Product availability: Stock - Normally stocked in distribution facility



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

### Complementary

Electrical connection	Straight female connector 1/2"20 UNF, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	6.56 ft (2 m)
Cable outer diameter	0.20 in (5.2 mm)
Cable composition	3 x 0.34 mm <sup>2</sup>
Wire insulation material	PVC
[Ue] rated operational voltage	250 V AC 300 V DC
Line Rated Current	4 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.31 lb(US) (0.14 kg)

### Environment

IP degree of protection	IP65 IP67
Product certifications	CULus
Ambient air temperature for operation	-13...176 °F (-25...80 °C) static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)

### Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	00785901463207
Package weight(Lbs)	0.10 kg (0.21 lb(US))
Returnability	Yes
Country of origin	CZ


## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>

## Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

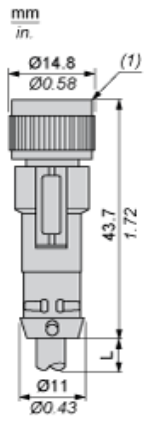


L : Length of cable  
(1) 1/2"-20UNF

---

Connections and Schemes

---

Connectors



GN : Green  
RD/ Red / White  
WH :  
RD/ Red / Black  
BK :