

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0503728000**
Status: **Active**
Overview: Micro-Latch Wire-to-Board Connector System
Description: 2.00mm Pitch, Micro-Latch Female Crimp Terminal, Tin (Sn) Plating, 22-26 AWG, Reel

Documents:

Drawing (PDF)	Product Specification PS-52968-006-001 (PDF)
Product Specification PS-51089-001 (PDF)	Product Specification PS-52968-007-001 (PDF)
Product Specification PS-51089-005-001 (PDF)	Product Specification PS-53717-002-001 (PDF)
Product Specification PS-51090-004-001 (PDF)	Product Specification PS-54111-001 (PDF)
Product Specification PS-51090-005-001 (PDF)	Product Specification PS-54111-002-001 (PDF)
Product Specification PS-51090-009 (PDF)	Product Specification PS-54452-006-001 (PDF)
Product Specification PS-51090-016-001 (PDF)	Product Specification PS-55533-004-001 (PDF)
Product Specification PS-51090-017-001 (PDF)	Application Specification 510900001-000 (PDF)
Product Specification PS-51160-001 (PDF)	Packaging Specification SPK-50372-001-001 (PDF)
Product Specification PS-51160-006-001 (PDF)	RoHS Certificate of Compliance (PDF)
Product Specification PS-51225-003-001 (PDF)	Product Literature (PDF)

General

Product Family	Crimp Terminals
Series	50372
Application	Signal, Wire-to-Board
Crimp Quality Equipment	Yes
Overview	<u>Micro-Latch Wire-to-Board Connector System</u>
Packaging Alternative	<u>503728100 (Loose)</u>
Product Name	Mi II, Micro-Latch
UPC	800753576186

Physical

Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Net Weight	47.693/mg
Packaging Type	Reel
Plating min - Mating	0.889µm
Plating min - Termination	0.914µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.40mm max.
Wire Size AWG	22, 24, 26
Wire Size mm ²	N/A


Electrical

Current - Maximum per Contact	2.5A
Voltage - Maximum	125V

Material Info

Reference - Drawing Numbers

Application Specification	510900001-000
Crimp Specification	CS-50372-001-001
Packaging Specification	SPK-50372-001-001
Product Specification	PS-51089-001, PS-51089-005-001, PS-51090-004-001, PS-51090-005-001, PS-51090-009, PS-51090-016-001, PS-51090-017-001, PS-51160-001, PS-51160-006-001, PS-51225-003-001, PS-52968-006-001, PS-52968-007-001, PS-53717-002-001,

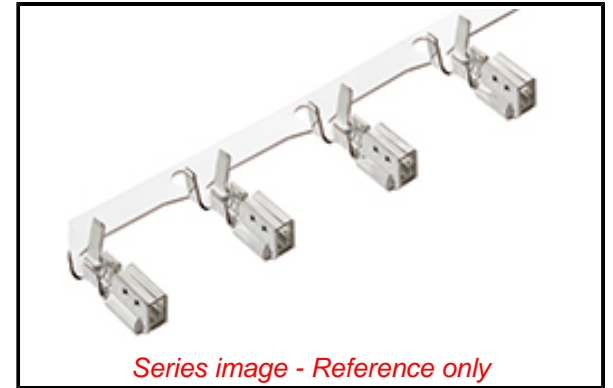

Series image - Reference only

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ECHA_01_2020 (16
January 2020

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Compliant

Not Contained

Search Parts in this Series

50372 Series

Use With

51065 Micro-Latch Receptacle Housing
51089 , 51090 Mi II Receptacle Housings

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description

Product #

Extraction Tool	<u>11030043</u>
FineAdjust Applicator	<u>2037021900</u>
for 2.0 Wire-to-Board Crimp Receptacle Terminal and SMEC Crimp Receptacle Terminals, 22-26 AWG and AVSS 0.3 Wires	

Sales Drawing

PS-54111-001, PS-54111-002-001, PS-54452-006-001,
PS-55533-004-001
SD-50372-001, SD-50372-8X00

Hand Crimp Tool 638235100
for 2.00mm Pitch
Wire-to-Board Crimp
Terminal
T2 Terminator Die 638528000

Japan

Description **Product #**

Applicator for M211A 571753000

Bench Press, 22-30

AWG Wire

S-1 Applicator for 571753710

DuraClik and Mi II

Terminals, 22-26

AWG

Extraction Tool 573216000

This document was generated on 02/27/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION