



Product availability: Stock - Normally stocked in distribution facility



## Main

|                              |                              |
|------------------------------|------------------------------|
| Range of product             | Altivar 212                  |
| Product or component type    | Variable speed drive         |
| Device short name            | ATV212                       |
| Product destination          | Asynchronous motors          |
| Product specific application | Pumps and fans in HVAC       |
| Assembly style               | With heat sink               |
| Phase                        | 3 phase                      |
| Motor power kW               | 11 kW                        |
| Maximum Horse Power Rating   | 15 hp                        |
| [Us] rated supply voltage    | 200...240 V - 15...10 %      |
| Supply voltage limits        | 170...264 V                  |
| Supply frequency             | 50...60 Hz - 5...5 %         |
| Network frequency            | 47.5...63 Hz                 |
| EMC filter                   | Without EMC filter           |
| Line current                 | 34.4 A 240 V<br>42.1 A 200 V |

## Complementary

|                                    |  |
|------------------------------------|--|
| Apparent power                     | 17.6 kVA 240 V   |
| Prospective line I <sub>sc</sub>   | 22 kA  |
| Continuous output current          | 46.2 A 230 V   |
| Maximum transient current          | 50.8 A 60 s  |
| Speed drive output frequency       | 0.5...200 Hz   |
| Nominal switching frequency        | 12 kHz   |
| Switching frequency                | 6...16 kHz adjustable<br>12...16 kHz with derating factor  |
| Speed range                        | 1...10   |
| Speed accuracy                     | +/- 10 % of nominal slip 0.2 T <sub>n</sub> to T <sub>n</sub>  |
| Torque accuracy                    | +/- 15 %   |
| Transient overtorque               | 120 % of nominal motor torque +/- 10 % 60 s  |
| Asynchronous motor control profile | Flux vector control without sensor, standard<br>Voltage/Frequency ratio, 2 points<br>Voltage/Frequency ratio, 5 points<br>Voltage/Frequency ratio, automatic IR compensation (U/f + automatic U <sub>0</sub> )<br>Voltage/frequency ratio - Energy Saving, quadratic U/f |
| Regulation loop                    | Adjustable PI regulator  |
| Motor slip compensation            | Automatic whatever the load<br>Adjustable<br>Not available in voltage/frequency ratio motor control  |
| Local signalling                   | DC bus energized 1 LED red)  |
| Output voltage                     | <= power supply voltage  |
| Isolation                          | Electrical between power and control   |
| Type of cable                      | Without mounting kit 1 IEC cable 113 °F (45 °C), copper 90 °C / XLPE/EPR<br>Without mounting kit 1 IEC cable 113 °F (45 °C), copper 70 °C / PVC<br>With UL Type 1 kit 3 UL 508 cable 104 °F (40 °C), copper 75 °C / PVC  |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

|                                     |   |
|-------------------------------------|---|
| Electrical connection               | VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES terminal 0.00 in <sup>2</sup> (2.5 mm <sup>2</sup> ) / AWG 14<br>L1/R, L2/S, L3/T terminal 0.04 in <sup>2</sup> (25 mm <sup>2</sup> ) / AWG 3  |
| Tightening torque                   | 5.31 Lbf.in (0.6 N.m) VIA, VIB, FM, FLA, FLB, FLC, RY, RC, F, R, RES)<br>39.83 lbf.in (4.5 N.m), 40 lb.in L1/R, L2/S, L3/T)   |
| Supply                              | Internal supply for reference potentiometer (1 to 10 kOhm) 10.5 V DC +/- 5 %, <10 A overload and short-circuit protection<br>Internal supply 24 V DC 21...27 V), <200 A overload and short-circuit protection   |
| Analogue input number               | 2   |
| Analogue input type                 | VIA switch-configurable voltage 0...10 V DC 24 V max 30000 Ohm 10 bits<br>VIB configurable voltage 0...10 V DC 24 V max 30000 Ohm 10 bits<br>VIB configurable PTC probe 0...6 probes 1500 Ohm<br>VIA switch-configurable current 0...20 mA 250 Ohm 10 bits  |
| Sampling duration                   | 2 Ms +/- 0.5 ms F discrete<br>2 Ms +/- 0.5 ms R discrete<br>2 Ms +/- 0.5 ms RES discrete<br>3.5 Ms +/- 0.5 ms VIA analog<br>22 ms +/- 0.5 ms VIB analog   |
| Response time                       | FM 2 ms +/- 0.5 ms analog<br>FLA, FLC 7 ms +/- 0.5 ms discrete<br>FLB, FLC 7 ms +/- 0.5 ms discrete<br>RY, RC 7 ms +/- 0.5 ms discrete  |
| Accuracy                            | +/- 0.6 % VIA) for a temperature variation 60 °C<br>+/- 0.6 % VIB) for a temperature variation 60 °C<br>+/- 1 % FM) for a temperature variation 60 °C   |
| Linearity error                     | VIA +/- 0.15 % of maximum value input<br>VIB +/- 0.15 % of maximum value input<br>FM +/- 0.2 % output   |
| Analogue output number              | 1   |
| Analogue output type                | FM switch-configurable voltage 0...10 V DC 7620 Ohm 10 bits<br>FM switch-configurable current 0...20 mA 970 Ohm 10 bits   |
| Discrete output number              | 2   |
| Discrete output type                | Configurable relay logic FLA, FLC) NO - 100000 cycles<br>Configurable relay logic FLB, FLC) NC - 100000 cycles<br>Configurable relay logic RY, RC) NO - 100000 cycles   |
| Minimum switching current           | 3 mA 24 V DC configurable relay logic   |
| Maximum switching current           | 5 A 250 V AC resistive cos phi = 1 L/R = 0 ms FL, R)<br>5 A 30 V DC resistive cos phi = 1 L/R = 0 ms FL, R)<br>2 A 250 V AC inductive cos phi = 0.4 L/R = 7 ms FL, R)<br>2 A 30 V DC inductive cos phi = 0.4 L/R = 7 ms FL, R)  |
| Discrete input type                 | F programmable 24 V DC level 1 PLC 4700 Ohm<br>R programmable 24 V DC level 1 PLC 4700 Ohm<br>RES programmable 24 V DC level 1 PLC 4700 Ohm   |
| Discrete input logic                | Positive logic (source) F, R, RES), <= 5 V, >= 11 V<br>Negative logic (sink) F, R, RES), >= 16 V, <= 10 V   |
| Acceleration and deceleration ramps | Automatic based on the load<br>Linear adjustable separately from 0.01 to 3200 s   |
| Braking to standstill               | By DC injection   |
| Protection type                     | Overheating protection drive<br>Thermal power stage drive<br>Short-circuit between motor phases drive<br>Input phase breaks drive<br>Overcurrent between output phases and earth drive<br>Overvoltages on the DC bus drive<br>Break on the control circuit drive<br>Against exceeding limit speed drive<br>Line supply overvoltage and undervoltage drive<br>Line supply undervoltage drive<br>Against input phase loss drive<br>Thermal protection motor<br>Motor phase break motor<br>With PTC probes motor |
| Dielectric strength                 | 2830 V DC between earth and power terminals<br>4230 V DC between control and power terminals  |
| Insulation resistance               | >= 1 mOhm 500 V DC for 1 minute   |
| Frequency resolution                | Display unit 0.1 Hz<br>Analog input 0.024/50 Hz   |

|  |   |
|--|---|
| Communication port protocol                | Modbus<br>LonWorks<br>METASYS N2<br>BACnet<br>APOGEE FLN  |
| Connector type                             | 1 open style<br>1 RJ45  |
| Physical interface                         | 2-wire RS 485   |
| Transmission frame                         | RTU   |
| Transmission rate                          | 9600 bps or 19200 bps   |
| Data format                                | 8 bits, 1 stop, odd even or no configurable parity  |
| Type of polarization                       | No impedance  |
| Number of addresses                        | 1...247   |
| Communication service                      | Read device identification (43)<br>Monitoring inhibitable<br>Read holding registers (03) 2 words maximum<br>Write multiple registers (16) 2 words maximum<br>Write single register (06)<br>Time out setting from 0.1 to 100 s |
| Option card                                | Communication card LonWorks   |
| Operating position                         | Vertical +/- 10 degree  |
| Width                                      | 9.65 in (245 mm)  |
| Height                                     | 12.99 in (330 mm)   |
| Depth                                      | 7.48 in (190 mm)  |
| Net weight                                 | 25.46 lb(US) (11.55 kg)   |
| Power dissipation in W                     | 459 W   |
| Air flow                                   | 41475.75 Gal/hr(US) (157 m3/h)  |
| Specific application                       | HVAC  |
| IP degree of protection                    | IP21  |
| Variable speed drive application selection | Compressor for scroll Building - HVAC<br>Fan Building - HVAC<br>Pump Building - HVAC  |
| Motor power range AC-3                     | 7...11 kW 200...240 V 3 phase   |
| Motor starter type                         | Variable speed drive  |

## Environment

|                                       |   |
|---------------------------------------|---|
| Electromagnetic compatibility         | Electrostatic discharge immunity test level 3 IEC 61000-4-2<br>Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3<br>Electrical fast transient/burst immunity test level 4 IEC 61000-4-4<br>1.2/50 µs - 8/20 µs surge immunity test level 3 IEC 61000-4-5<br>Conducted radio-frequency immunity test level 3 IEC 61000-4-6<br>Voltage dips and interruptions immunity test IEC 61000-4-11 |
| Pollution degree                      | 2 IEC 61800-5-1   |
| IP degree of protection               | IP20 on upper part without blanking plate on cover EN/IEC 61800-5-1<br>IP20 on upper part without blanking plate on cover EN/IEC 60529<br>IP21 EN/IEC 61800-5-1<br>IP21 EN/IEC 60529<br>IP41 on upper part EN/IEC 61800-5-1<br>IP41 on upper part EN/IEC 60529  |
| Vibration resistance                  | 1.5 mm 3...13 Hz)EN/IEC 60068-2-6<br>1 gn 13...200 Hz)EN/IEC 60068-2-8  |
| Shock resistance                      | 15 gn 11 ms IEC 60068-2-27  |
| Environmental characteristic          | Classes 3C1 IEC 60721-3-3<br>Classes 3S2 IEC 60721-3-3  |
| Noise level                           | 54 dB 86/188/EEC  |
| Operating altitude                    | 3280.84...9842.52 ft (1000...3000 m) limited to 2000 m for the Corner Grounded distribution network with current derating 1 % per 100 m<br><= 3280.84 ft (1000 m) without   |
| Relative humidity                     | 5...95 % without condensation IEC 60068-2-3<br>5...95 % without dripping water IEC 60068-2-3  |
| Ambient air temperature for operation | 14...104 °F (-10...40 °C) without)<br>104...122 °F (40...50 °C) with derating factor)   |
| Ambient air temperature for storage   | -13...158 °F (-25...70 °C)  |

|                        |   |
|------------------------|---|
| Standards              | EN 61800-3 environments 2 category C1<br>EN 61800-3 environments 1 category C2<br>EN 61800-3<br>IEC 61800-3 environments 2 category C3<br>EN 61800-5-1<br>EN 61800-3 environments 1 category C3<br>IEC 61800-3<br>IEC 61800-3 environments 1 category C2<br>EN 61800-3 environments 2 category C2<br>IEC 61800-5-1<br>IEC 61800-3 environments 1 category C1<br>IEC 61800-3 environments 1 category C3<br>UL Type 1<br>EN 61800-3 environments 2 category C3<br>EN 61800-3 environments 1 category C1<br>IEC 61800-3 environments 2 category C2<br>IEC 61800-3 environments 2 category C1 |
| Product certifications | C-Tick<br>NOM 117<br>UL<br>CSA  |
| Marking                | CE  |

### Ordering and shipping details

|                     |                                   |
|---------------------|-----------------------------------|
| Category            | 22155 - ATV212 1 - 25 HP 230 VOLT |
| Discount Schedule   | CP4D                              |
| GTIN                | 00785901921837                    |
| Package weight(Lbs) | 11.18 kg (24.64 lb(US))           |
| Returnability       | Yes                               |
| Country of origin   | ID                                |

### Offer Sustainability

|                            |  |
|----------------------------|--|
| Sustainable offer status   | Green Premium product  |
| REACH Regulation           | <a href="#">REACH Declaration</a>  |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>                               |
| Mercury free               | Yes  |
| RoHS exemption information | <a href="#">Yes</a>  |
| China RoHS Regulation      | <a href="#">China RoHS Declaration</a>   |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>  |
| Circularity Profile        | <a href="#">End Of Life Information</a>  |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

### Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions


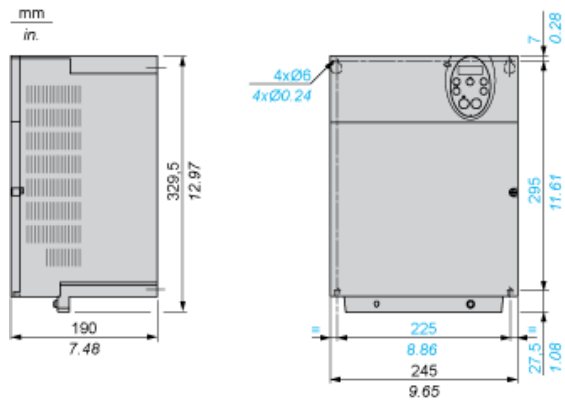


Plate for EMC mounting (supplied with the drive)

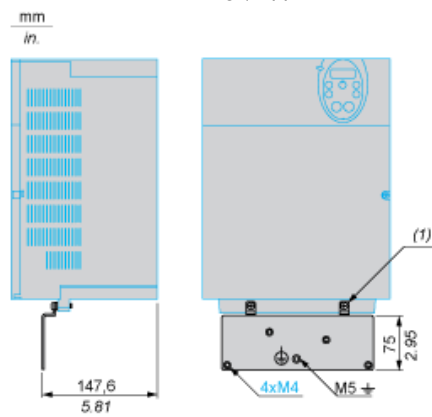

(1) 2 x M5 screws


Mounting Recommendations

Clearance

Depending on the conditions in which the drive is to be used, its installation will require certain precautions and the use of appropriate accessories.


Install the unit vertically:

- Do not place it close to heating elements.
- Leave sufficient free space to ensure that the air required for cooling purposes can circulate from bottom to the top of the unit.

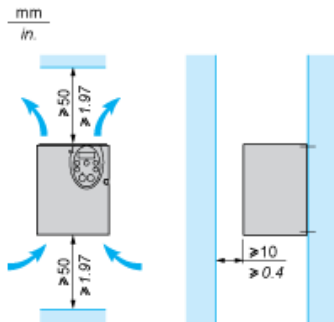

Mounting Types


Type A mounting

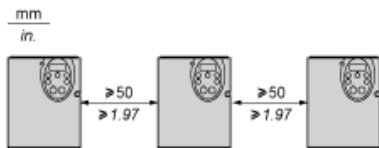

Type B mounting



Type C mounting

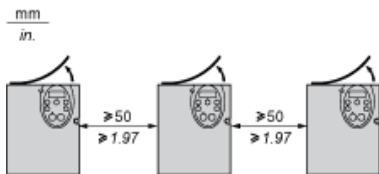


By removing the protective blanking cover from the top of the drive, the degree of protection for the drive becomes IP21. The protective blanking cover may vary according to the drive model, see opposite.

Specific Recommendations for Mounting in an Enclosure

To help ensure proper air circulation in the drive:

- Fit ventilation grilles.
- Check that there is sufficient ventilation. If there is not, install a forced ventilation unit with a filter. The openings and/or fans must provide a flow rate at least equal to that of the drive fans (refer to the product characteristics).



- Use special filters with UL Type 12/IP54 protection.
- Remove the blanking cover from the top of the drive.

### Sealed Metal Enclosure (IP54 Degree of Protection)

The drive must be mounted in a dust and damp proof enclosure in certain environmental conditions, such as dust, corrosive gases, high humidity with risk of condensation and dripping water, splashing liquid, etc. This enables the drive to be used in an enclosure where the maximum internal temperature reaches 50°C.

Recommended Wiring Diagram

3-Phase Power Supply



- A1: ATV 212 drive
- KM1: Contactor
- Q1: Circuit breaker
- Q2: GV2 L rated at twice the nominal primary current of T1
- Q3: GB2CB05
- S1, XB4 B or XB5 A pushbuttons
- S2:
- T1: 100 VA transformer 220 V secondary
- (1) Fault relay contacts for remote signalling of the drive status
- (2) Connection of the common for the logic inputs depends on the positioning of the switch (Source, PLC, Sink)
- (3) Reference potentiometer SZ1RV1202

NOTE: All terminals are located at the bottom of the drive. Install interference suppressors on all inductive circuits near the drive or connected on the same circuit, such as relays, contactors, solenoid valves, fluorescent lighting, etc.

Switches (Factory Settings)

Voltage/current selection for analog I/O (VIA and VIB)



Voltage/current selection for analog I/O (FM)



Selection of logic type



- (1) negative logic
- (2) positive logic

Other Possible Wiring Diagrams



## Logic Inputs According to the Position of the Logic Type Switch

"Source" position




"Sink" position



"PLC" position with PLC transistor outputs



(1) PLC



(1) PLC

2-wire control



F: Forward  
R: Preset speed  
(2) ATV 212 control terminals

3-wire control



F: Forward  
R: Stop  
RES: Reverse  
(2) ATV 212 control terminals

PTC probe




(2) ATV 212 control terminals  
(3) Motor


## Analog Inputs

Voltage analog inputs

External +10 V



(2) ATV 212 control terminals  
(4) Speed reference potentiometer 2.2 to 10 kΩ



(2) ATV 212 control terminals

Analog input configured for current: 0-20 mA, 4-20 mA, X-Y mA



(2) ATV 212 control terminals

(5) Source 0-20 mA, 4-20 mA, X-Y mA

Analog input VIA configured as positive logic input ("Source" position)



(2) ATV 212 control terminals


Analog input VIA configured as negative logic input ("Sink" position)



(2) ATV 212 control terminals

## Derating Curves

The derating curves for the drive nominal current ( $I_n$ ) depend on the temperature, the switching frequency and the mounting type (A, B or C). For intermediate temperatures (45°C for example), interpolate between 2 curves.

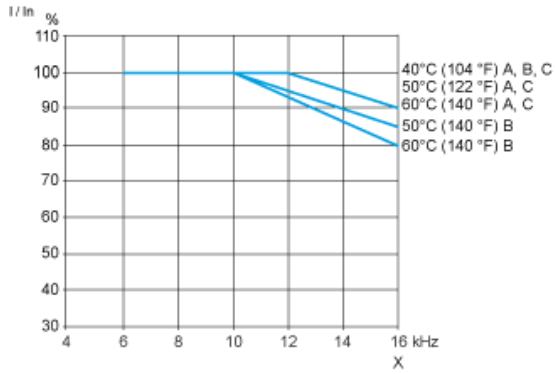

X Switching frequency