

Product data sheet

Characteristics

XZCPV0766L5

pre-wired connectors XZ - elbowed female - M8
- 3 pins - cable PVC 5m

Product availability: Non-Stock - Not normally stocked in distribution facility



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	Elbowed female connector M8, 3 pins
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	2 PNP LEDs
Cable length	16.40 ft (5 m)
Cable outer diameter	0.18 in (4.6 mm)
Cable composition	3 x 0.25 mm ²
Wire insulation material	PVC
[Ue] rated operational voltage	30 V AC 36 V DC
Line Rated Current	3 A
Contact resistance	5000 µOhm
Minimum insulating resistance	1 GΩ
Net weight	0.40 lb(US) (0.18 kg)

Environment

IP degree of protection	IP67 IP65
Product certifications	CULus
Ambient air temperature for operation	-13...176 °F (-25...80 °C) static
Ambient air temperature for storage	-13...176 °F (-25...80 °C)

Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	00785901395492
Package weight(Lbs)	0.15 kg (0.34 lb(US))
Returnability	No
Country of origin	PL

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.


Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to www.p65warnings.ca.gov
REACH Regulation	REACH Declaration
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes

Contractual warranty

Warranty	18 months
----------	-----------


Dimensions

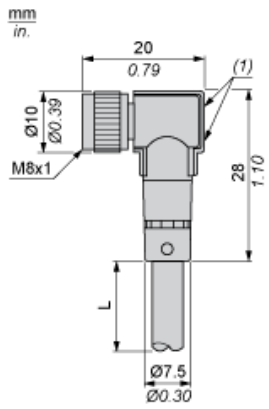

- L : Length of cable
- (1) 2 LEDs limited to 10...30 VDC max.

Connections and Schemes


Connector



BU : Blue
BN : Brown
BK : Black

Connections and Schemes

LED Connection



BN : Brown
BK : Black
BU : Blue
GN : Green
YW : Yellow
(1) Signal