


# 2510KF1BG

## Manual Switch - Flush Mount - 2P - Toggle Operated - Green Indicator - 600VAC

Product availability: Non-Stock - Not normally stocked in distribution facility

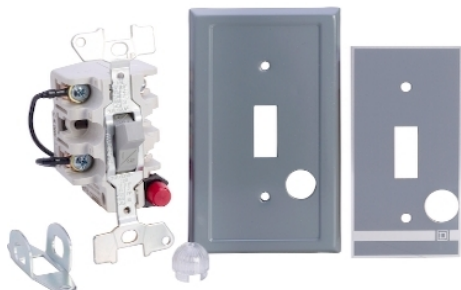

### Main

Product	Single Unit Manual Switch
Type	K

### Complementary

Current Rating	30 A
Horsepower Rating	2 Hp 115 V AC 2 Hp 230 V AC 3 Hp 460 V AC 3 Hp 575 V AC 1 Hp 90 V DC 2 Hp 115 V DC 1.5 hp 230 V DC
Maximum Voltage Rating	600 V AC 230 V DC
Number of Poles	2P
Control Unit Type	Toggle
Number of Phases	1 phase
Pilot Light	Green indicator, 230 V
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Wire Gauge	AWG 14...AWG 10 copper
Height	107.95 mm (4.25 in)
Width	61.98 mm (2.44 in)
Depth	69.85 mm (2.75 in)

### Environment

Certifications	UL listed file E42243 CCN NLRV CSA LR25490 class 3211 05
NEMA Enclosure Rating	Not rated (flush plate) painted sheet steel standard size

### Ordering and shipping details

Category	21102 - 2510,2511,2512 K
Discount Schedule	CP1
Package weight(Lbs)	0.23 kg (0.5 lb(US))
Returnability	No
Country of origin	MX

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Not compliant
China RoHS Regulation	<a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------