

Product availability: Stock - Normally stocked in distribution facility



## Main

Range of product	Zelio Relay
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM 2 C/O Plug-in relay REXL 2 C/O
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

## Complementary

[Ith] conventional free air thermal current	5 A with bus jumper 12 A
[Ue] rated operational voltage	< 250 V
Connections - terminals	Connector, 2 x 0.5...2 x 1.5 mm <sup>2</sup> AWG 20...AWG 16) solid without cable end Connector, 1 x 0.25...1 x 2.5 mm <sup>2</sup> AWG 22...AWG 17) flexible with cable end Connector, 1 x 0.5...1 x 2.5 mm <sup>2</sup> AWG 22...AWG 14) flexible with cable end Connector, 2 x 0.25...2 x 1 mm <sup>2</sup> AWG 20...AWG 14) solid without cable end
Tightening torque	< 1 N.m M3
Fixing mode	By screw panel) Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Width	1.06 in (27 mm)
Net weight	0.13 lb(US) (0.058 kg)

## Environment

Standards	IEC 61984
Product certifications	CSA Lloyd's UL
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	-40...131 °F (-40...55 °C)
IP degree of protection	IP20 EN/IEC 60529
Dielectric strength	2500 V

## Ordering and shipping details

Category	21128 - ZELIO ICE CUBE RELAY ACCESSORIES
Discount Schedule	CP2
GTIN	00785901437871
Package weight(Lbs)	0.05 kg (0.1 lb(US))
Returnability	Yes
Country of origin	CN

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

Warranty	18 months
----------	-----------

## Socket

### Socket with Separate Contact Terminals and Connector for 2 Timed C/O Contacts

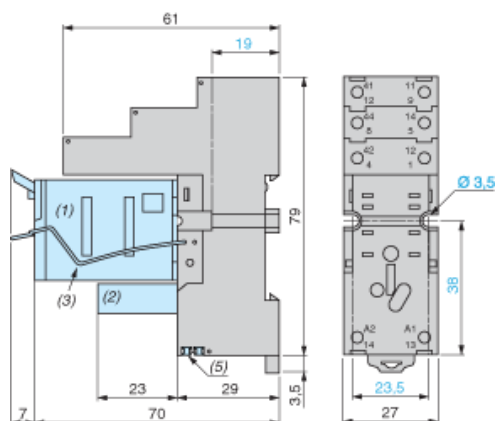

- 1 Relay
- 2 Protection Module
- 3 Carriage Stirrup
- 5 2 Links connection