


Product data sheet

Characteristics

LXD3M7

TeSys D - contactor coil - LXD3 - 220 V AC
50/60 Hz for 40... 65 A contactor

Product availability: Stock - Normally stocked in distribution facility

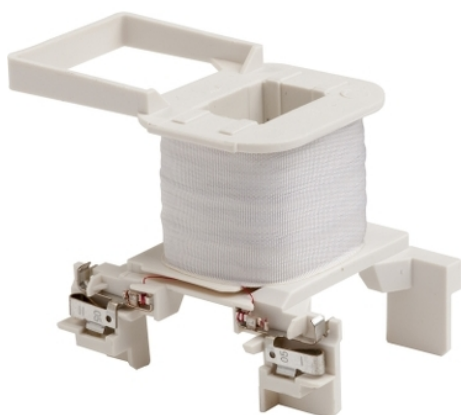

Main

Range	TeSys
Product or component type	Contactor coil
Device short name	LXD3
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	220 V AC 50/60 Hz
Average resistance	182 Ohm 68 °F (20 °C)
Inductance of closed circuit	10 H
Product compatibility	LC1D40A...D65A LC1DT80A LC1DT60A
Mechanical durability	6 Mcycles
Maximum operating rate	3600 cyc/h 140 °F (60 °C)

Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	Drop-out 0.3...0.6 Uc 50/60 Hz 140 °F (60 °C) Operational 0.8...1.1 Uc 50 Hz 140 °F (60 °C) Operational 0.85...1.1 Uc 60 Hz 140 °F (60 °C)
Inrush power in VA	160 VA 60 Hz 0.75 68 °F (20 °C) 160 VA 50 Hz 0.75 68 °F (20 °C)
Hold-in power consumption in VA	15 VA 60 Hz 0.3 68 °F (20 °C) 15 VA 50 Hz 0.3 68 °F (20 °C)
Heat dissipation	4...5 W 50/60 Hz

Environment

Ambient air temperature for operation	23...140 °F (-5...60 °C)
Product weight	0.15 lb(US) (0.07 kg)

Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
Discount Schedule	I12
GTIN	00785901811374
Package weight(Lbs)	0.12 kg (0.26 lb(US))
Returnability	Yes
Country of origin	FR

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide which is known to the State of California to cause Carcinogen harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes

China RoHS Regulation	China RoHS Declaration
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End Of Life Information

Contractual warranty

Warranty	18 months
----------	-----------
