

# Product data sheet

## Characteristics

# XZCRA150941J5

jumper cable XZ - male straight M12 4-pin - female straight M8 4-pin - PVC 5m

Product availability: Non-Stock - Not normally stocked in distribution facility



### Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Jumper cable

### Complementary

Jumper cable end 1	M12 male 4 pins straight screw-on and clip-on
Jumper cable end 2	M8 female 4 pins straight screw-on and clip-on
Collar material	Metal
Cable composition	4 x 0.34 mm <sup>2</sup>
Cable length	16.40 ft (5 m)
Cable outer diameter	0.21 in (5.3 mm)
[Ue] rated operational voltage	60 V AC 75 V DC
Line Rated Current	4 A
Insulation resistance	>= 1000 MOhm
Maximum resistance across terminals	5000 mOhm
Product weight	0.46 lb(US) (0.21 kg)

### Environment

IP degree of protection	IP68
Ambient air temperature for operation	-13...185 °F (-25...85 °C) static

### Ordering and shipping details

Category	22483 - MACHINE CABLES
Discount Schedule	DS3
GTIN	03389119021661
Package weight(Lbs)	0.23 kg (0.5 lb(US))
Returnability	No
Country of origin	PL

### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Di-isodecyl phthalate (DIDP) and Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen and Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes


## Contractual warranty

---

Warranty	18 months
----------	-----------

---

Dimensions

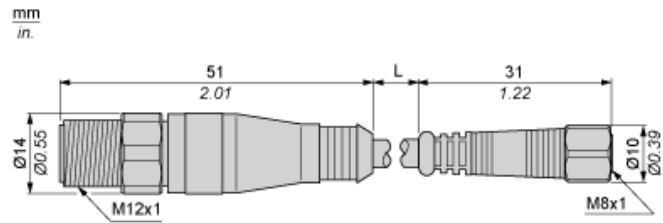

L : Length of cable

---

## Connections and Schemes

---

