

Break Glass Pushbutton Stations


NEMA 4X Enclosure

Siemens Class 52, break glass pushbutton stations feature our 30 mm metal pushbutton with chrome finish. Break glass pushbuttons are heavy duty watertight / oil-tight and available in either a NEMA 12/13 painted steel enclosure or NEMA 4X aluminum enclosure.

Break Glass Pushbutton Units (30mm Water, Oil Tight & Corrosion Resistant – Class 52) Class 52 Oiltight Pushbutton Stations ³⁾

Coming Soon ²⁾

Type of Device	Degree of Protection	Conduit Entry 3/4" NPT	No. of Command Points	Contact ¹⁾	Legend Plate	Order No.
Break Glass Pushbutton Station	NEMA 4X	Bottom	1	1NO-1NC	Emergency Shut-off	52G112FB
					Emergency Off	52G113FB
					Emergency Power Off	52G114FB
		Emergency Generator Stop			52G115FB	
		Emergency Shut-off			52G112FR	
		Emergency Off			52G113FR	
	Back ²⁾	Back ²⁾ , Top or Bottom	1	1NO-1NC	Emergency Power Off	52G114FR
					Emergency Generator Stop	52G115FR
					Emergency Shut-off	52G112FD
		Emergency Off			52G113FD	
		Emergency Power Off			52G114FD	
		Emergency Generator Stop			52G115FD	
NEMA 12/13	N/A	N/A	1	1NO-1NC	Emergency Shut-off	52G112S
					Emergency Off	52G113S
					Emergency Power Off	52G114S
					Emergency Generator Stop	52G115S

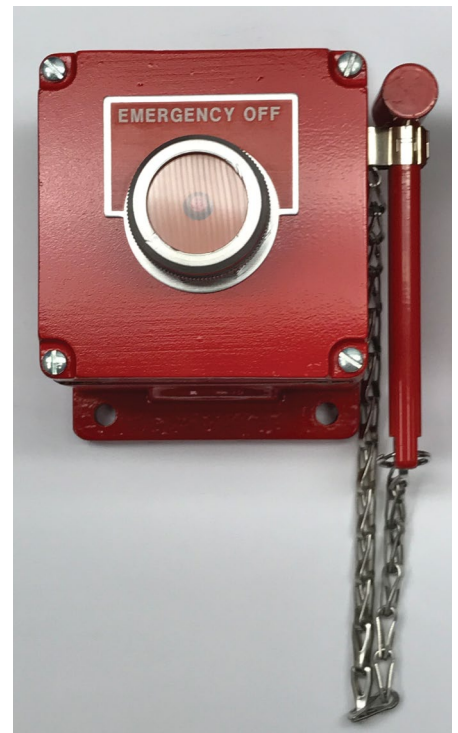

Accessories

- Break Glass Pushbutton with 1NO-1NC, 4 Extra Glass Lens Inserts52PM8AGA
- Break Glass Pushbutton with 1NO-1NC, 4 Extra Glass Lens Inserts, Hammer, Chain, Clip, Mounting Screw ⁴⁾ 52PM8AGAH
- Replacement Glass Lens Insert Kit (5 piece pack)52RC1AG

1) One additional Class 52 contact block may be field installed.
 2) Versions with conduit entry from the back available mid to late FY19.
 3) All Glass Break Pushbutton Stations come with 4 extra glass lens inserts.
 4) Sealant is not supplied with 52PM8AGAH kits, but Teflon tape or pipe dope is required on the hammer mounting clip screw when field installed in a NEMA 4X Enclosure.

Siemens Industry, Inc.

5300 Triangle Parkway
Norcross, GA 30092

1-866-663-7324
info.us@siemens.com

Subject to change without prior notice

Order No.: CPFL-BGPB-0419

All rights reserved

Printed in USA

© 2019 Siemens Industry, Inc.

The technical data presented in this document is based on an actual case or on as-designed parameters, and therefore should not be relied upon for any specific application and does not constitute a performance guarantee for any projects. Actual results are dependent on variable conditions. Accordingly, Siemens does not make representations, warranties, or assurances as to the accuracy, currency or completeness of the content contained herein. If requested, we will provide specific technical data or specifications with respect to any customer's particular applications. Our company is constantly involved in engineering and development. For that reason, we reserve the right to modify, at any time, the technology and product specifications contained herein.