


Proximity sensors SMT-10M, for C-slot

Technical data – Magneto-resistive

Dimensions

Download CAD data → www.festo.com

SMT-10M-...-Q, lateral connection

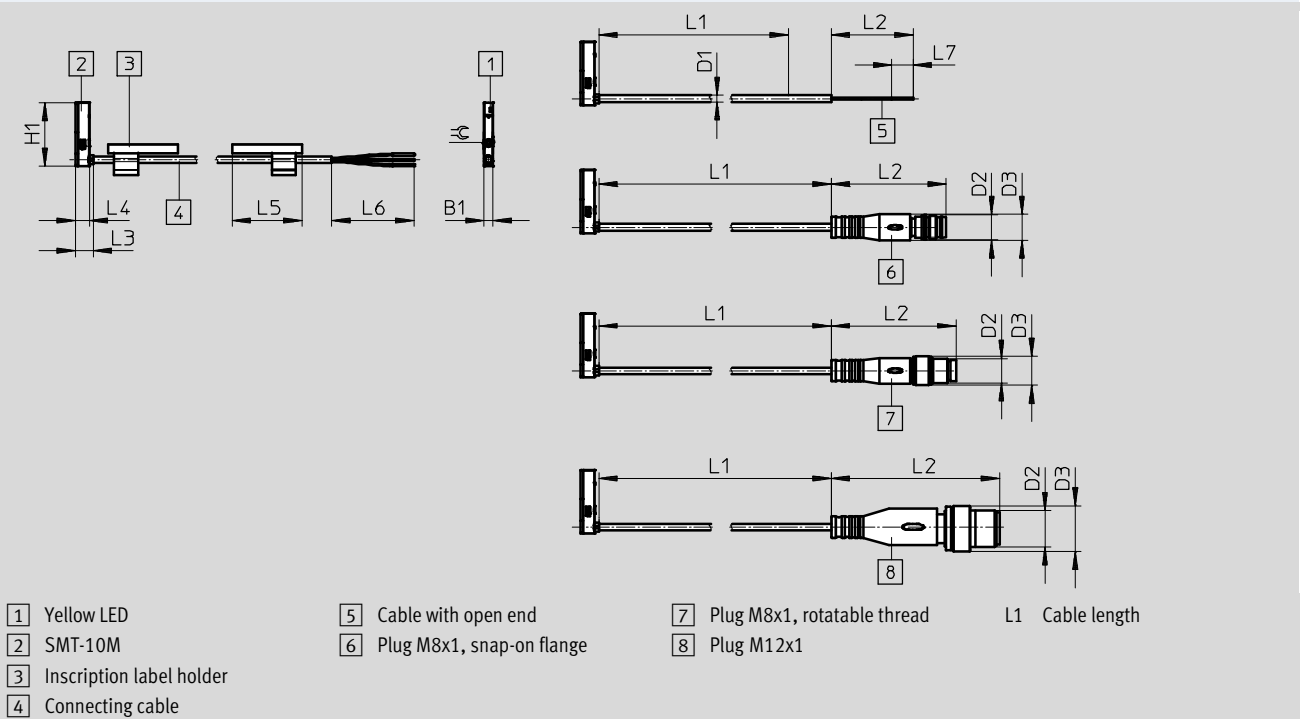

Type	B1	D1	D2	D3	H1	L2	L3	L4	L5	L6	L7	⌀
SMT-10M-...-OE	2.9	2.15	-	-	20.9	50	6	4.6	23	50	7	1.5
SMT-10M-...-M8D			M8x1	8.5		32.7					-	
SMT-10M-...-M8			M8x1	9.6		41.1					-	
SMT-10M-...-M12			M12x1	15		55.5					-	

★ Core product range

Ordering data	Switching output	Electrical connection		Cable length [m]	Weight [g]	Part No.	Type
		Cable	Cable with plug, rotatable thread				
	N/O contact	PNP	3-wire	-	2.5	16.8	★ 551373 SMT-10M-PS-24V-E-2,5-L-OE
			-	M8x1, 3-pin	0.3	6.7	★ 551375 SMT-10M-PS-24V-E-0,3-L-M8D
	NPN	3-wire	-	2.5	16.8	★ 551377 SMT-10M-NS-24V-E-2,5-L-OE	
		-	M8x1, 3-pin	0.3	6.7	★ 551379 SMT-10M-NS-24V-E-0,3-L-M8D	
	Non-contacting, 2-wire	2-wire	-		2.5	14.6	★ 551382 SMT-10M-ZS-24V-E-2,5-L-OE

Festo core product range

- ★ Ready for dispatch from the Festo factory in 24 hours
- ☆ Ready for dispatch in 5 days maximum from stock