


Pin busbar, can be cut 18 mm<sup>2</sup>, 3-phase, 1016mm , according to UL 489, 480/277V for LS 5SJ4...-HG

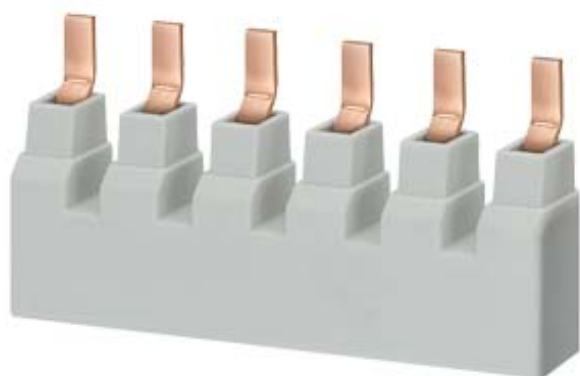

| Model                            |                      |
|----------------------------------|----------------------|
| Product brand name               | SENTRON              |
| Product designation              | Pin busbar           |
| Design of the product            | Can be cut to length |
| General technical data           |                      |
| Phase number                     | 3                    |
| Current                          |                      |
| Continuous current / rated value | 80 A                 |
| Product details                  |                      |
| Product feature / insulated      | Yes                  |
| Connections                      |                      |
| Type of electrical connection    | Pin                  |
| Mechanical Design                |                      |
| Width                            | 60 mm                |
| Length                           | 1 016 mm             |
| Net weight                       | 1 049.98 g           |

## Certificates

General Product Approval

Declaration of Conformity



## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3710-3HG>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3710-3HG>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3710-3HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3710-3HG)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

