


Pin busbar, can be cut 18 mm², 1-phase, 1016mm , according to UL 489, 480/277V for LS 5SJ4...-HG

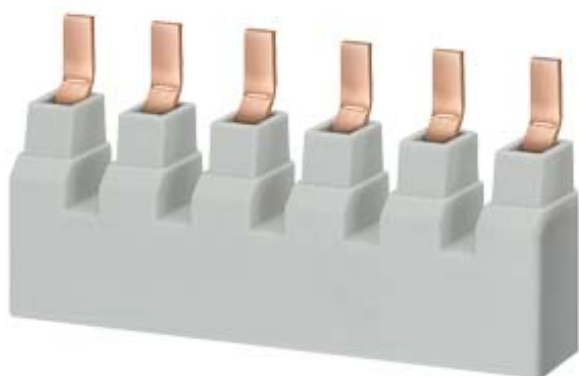

| Model | |
|----------------------------------|----------------------|
| Product brand name | SENTRON |
| Product designation | Pin busbar |
| Design of the product | Can be cut to length |
| General technical data | |
| Phase number | 1 |
| Current | |
| Continuous current / rated value | 80 A |
| Product details | |
| Product feature / insulated | Yes |
| Connections | |
| Type of electrical connection | Pin |
| Mechanical Design | |
| Width | 60 mm |
| Length | 1 016 mm |
| Net weight | 741.86 g |

Certificates

General Product Approval

Declaration of Conformity



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=5ST3701-3HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3701-3HG>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5ST3701-3HG

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

