

Circuit breaker size S00 for transformer protection with approval circuit breaker UL 489, CSA C22.2 No.5-02 A-release 12.5 A N-release 260 A screw terminal Standard switching capacity



|                          |                                                               |
|--------------------------|---------------------------------------------------------------|
| Product brand name       | SIRIUS                                                        |
| Product designation      | Circuit breaker                                               |
| Design of the product    | For transformer protection according to UL 489/CSA C22.2 No.5 |
| Product type designation | 3RV2                                                          |

| General technical data                                                    |        |
|---------------------------------------------------------------------------|--------|
| Size of the circuit-breaker                                               | S00    |
| Product extension                                                         |        |
| • Auxiliary switch                                                        | Yes    |
| Power loss [W] for rated value of the current                             |        |
| • at AC in hot operating state                                            | 9.25 W |
| • at AC in hot operating state per pole                                   | 3.1 W  |
| Insulation voltage with degree of pollution 3 at AC rated value           | 690 V  |
| Surge voltage resistance rated value                                      | 6 kV   |
| maximum permissible voltage for safe isolation                            |        |
| • in networks with grounded star point between main and auxiliary circuit | 400 V  |
| • in networks with grounded star point between main and auxiliary circuit | 400 V  |

|                                                   |             |
|---------------------------------------------------|-------------|
| <b>Protection class IP</b>                        |             |
| • on the front                                    | IP20        |
| • of the terminal                                 | IP00        |
| <b>Shock resistance</b>                           |             |
| • acc. to IEC 60068-2-27                          | 25g / 11 ms |
| <b>Mechanical service life (switching cycles)</b> |             |
| • of the main contacts typical                    | 100 000     |
| • of auxiliary contacts typical                   | 100 000     |
| <b>Electrical endurance (switching cycles)</b>    |             |
| • typical                                         | 100 000     |
| <b>Reference code acc. to DIN EN 81346-2</b>      | Q           |

#### Ambient conditions

|                                                        |                |
|--------------------------------------------------------|----------------|
| <b>Installation altitude at height above sea level</b> |                |
| • maximum                                              | 2 000 m        |
| <b>Ambient temperature</b>                             |                |
| • during operation                                     | -20 ... +60 °C |
| • during storage                                       | -50 ... +80 °C |
| • during transport                                     | -50 ... +80 °C |
| <b>Temperature compensation</b>                        | -20 ... +60 °C |
| Relative humidity during operation                     | 10 ... 95 %    |

#### Main circuit

|                                                 |              |
|-------------------------------------------------|--------------|
| <b>Number of poles for main current circuit</b> | 3            |
| <b>Operating voltage</b>                        |              |
| • rated value                                   | 690 V        |
| • at AC-3 rated value maximum                   | 690 V        |
| <b>Operating frequency rated value</b>          | 50 ... 60 Hz |
| <b>Operating current rated value</b>            | 12.5 A       |
| <b>Operating current</b>                        |              |
| • at AC-3                                       |              |
| — at 400 V rated value                          | 12.5 A       |
| <b>Operating power</b>                          |              |
| • at AC-3                                       |              |
| — at 230 V rated value                          | 3 000 W      |
| — at 400 V rated value                          | 5 500 W      |
| — at 500 V rated value                          | 7 500 W      |
| — at 690 V rated value                          | 7 500 W      |
| <b>Operating frequency</b>                      |              |
| • at AC-3 maximum                               | 15 1/h       |

#### Auxiliary circuit

|                                                     |   |
|-----------------------------------------------------|---|
| <b>Number of NC contacts for auxiliary contacts</b> | 0 |
| <b>Number of NO contacts for auxiliary contacts</b> | 0 |

|                                                                                                |                                                                                        |
|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| <b>Number of CO contacts</b>                                                                   |                                                                                        |
| • for auxiliary contacts                                                                       | 0                                                                                      |
| <b>Protective and monitoring functions</b>                                                     |                                                                                        |
| <b>Product function</b>                                                                        |                                                                                        |
| • Ground fault detection                                                                       | No                                                                                     |
| • Phase failure detection                                                                      | No                                                                                     |
| <b>Design of the overload release</b>                                                          | thermal                                                                                |
| <b>Operational short-circuit current breaking capacity (Ics) at AC</b>                         |                                                                                        |
| • at 240 V rated value                                                                         | 100 kA                                                                                 |
| • at 400 V rated value                                                                         | 100 kA                                                                                 |
| • at 500 V rated value                                                                         | 42 kA                                                                                  |
| • at 690 V rated value                                                                         | 4 kA                                                                                   |
| <b>Maximum short-circuit current breaking capacity (Icu)</b>                                   |                                                                                        |
| • at AC at 240 V rated value                                                                   | 100 kA                                                                                 |
| • at AC at 400 V rated value                                                                   | 100 kA                                                                                 |
| • at AC at 500 V rated value                                                                   | 42 kA                                                                                  |
| • at AC at 690 V rated value                                                                   | 6 kA                                                                                   |
| • at 480 AC Y/277 V acc. to UL 489 rated value                                                 | 65 000 A                                                                               |
| <b>Response value current</b>                                                                  |                                                                                        |
| • of instantaneous short-circuit trip unit                                                     | 260 A                                                                                  |
| <b>Short-circuit protection</b>                                                                |                                                                                        |
| <b>Product function Short circuit protection</b>                                               | Yes                                                                                    |
| <b>Design of the short-circuit trip</b>                                                        | magnetic                                                                               |
| <b>Design of the fuse link for IT network for short-circuit protection of the main circuit</b> |                                                                                        |
| • at 400 V                                                                                     | gL/gG 63 A                                                                             |
| • at 500 V                                                                                     | gL/gG 50 A                                                                             |
| • at 690 V                                                                                     | gL/gG 40 A                                                                             |
| <b>Installation/ mounting/ dimensions</b>                                                      |                                                                                        |
| <b>Mounting position</b>                                                                       | any                                                                                    |
| <b>Mounting type</b>                                                                           | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| <b>Height</b>                                                                                  | 144 mm                                                                                 |
| <b>Width</b>                                                                                   | 45 mm                                                                                  |
| <b>Depth</b>                                                                                   | 97 mm                                                                                  |
| <b>Required spacing</b>                                                                        |                                                                                        |
| • for grounded parts at 400 V                                                                  |                                                                                        |
| — downwards                                                                                    | 30 mm                                                                                  |
| — upwards                                                                                      | 30 mm                                                                                  |
| — Backwards                                                                                    | 0 mm                                                                                   |

|                               |       |
|-------------------------------|-------|
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for live parts at 400 V     |       |
| — downwards                   | 30 mm |
| — upwards                     | 30 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for grounded parts at 500 V |       |
| — downwards                   | 30 mm |
| — upwards                     | 30 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for live parts at 500 V     |       |
| — downwards                   | 30 mm |
| — upwards                     | 30 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for grounded parts at 690 V |       |
| — downwards                   | 70 mm |
| — upwards                     | 70 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for live parts at 690 V     |       |
| — downwards                   | 70 mm |
| — upwards                     | 70 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |

## Connections/ Terminals

|                                                                      |                      |
|----------------------------------------------------------------------|----------------------|
| <b>Product function</b>                                              |                      |
| • removable terminal for auxiliary and control circuit               | No                   |
| <b>Type of electrical connection</b>                                 |                      |
| • for main current circuit                                           | screw-type terminals |
| <b>Arrangement of electrical connectors for main current circuit</b> | Top and bottom       |
| <b>Type of connectable conductor cross-sections</b>                  |                      |
| • for main contacts                                                  |                      |

|                                                     |                                                        |
|-----------------------------------------------------|--------------------------------------------------------|
| — single or multi-stranded                          | 1 ... 10 mm <sup>2</sup> , max. 2x 10 mm <sup>2</sup>  |
| — finely stranded with core end processing          | 1 ... 16 mm <sup>2</sup> , max. 6 + 16 mm <sup>2</sup> |
| • at AWG conductors for main contacts               | 2x (14 ... 10)                                         |
| <b>Tightening torque</b>                            |                                                        |
| • for main contacts with screw-type terminals       | 2.5 ... 3 N·m                                          |
| <b>Design of screwdriver shaft</b>                  | Diameter 5 to 6 mm                                     |
| <b>Size of the screwdriver tip</b>                  | Pozidriv 2                                             |
| <b>Design of the thread of the connection screw</b> |                                                        |
| • for main contacts                                 | M4                                                     |

| Safety related data                                                       |        |
|---------------------------------------------------------------------------|--------|
| <b>B10 value</b>                                                          |        |
| • with high demand rate acc. to SN 31920                                  | 5 000  |
| <b>Proportion of dangerous failures</b>                                   |        |
| • with low demand rate acc. to SN 31920                                   | 50 %   |
| • with high demand rate acc. to SN 31920                                  | 50 %   |
| <b>Failure rate [FIT]</b>                                                 |        |
| • with low demand rate acc. to SN 31920                                   | 50 FIT |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 10 y   |
| <b>Display version</b>                                                    |        |
| • for switching status                                                    | Handle |

#### Certificates/ approvals

| General Product Approval                                                          |                                                                                   | Declaration of Conformity                                                         | Test Certificates                                                                 |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  |  |  |  |
| CSA                                                                               | UL                                                                                | EG-Konf.                                                                          |                                                                                   |

[Miscellaneous](#)

[Special Test Certificate](#)

| Test Certificates                                                                 | Marine / Shipping                                                                 | other                                                                               |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |
|                                                                                   |  |  |
|                                                                                   | LRS                                                                               | RMRS                                                                                |
|                                                                                   |                                                                                   | VDE                                                                                 |

## Railway

[Vibration and Shock](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2811-1KD10>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2811-1KD10>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1KD10>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2811-1KD10&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2811-1KD10&lang=en)


**Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2811-1KD10/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2811-1KD10&objecttype=14&gridview=view1>

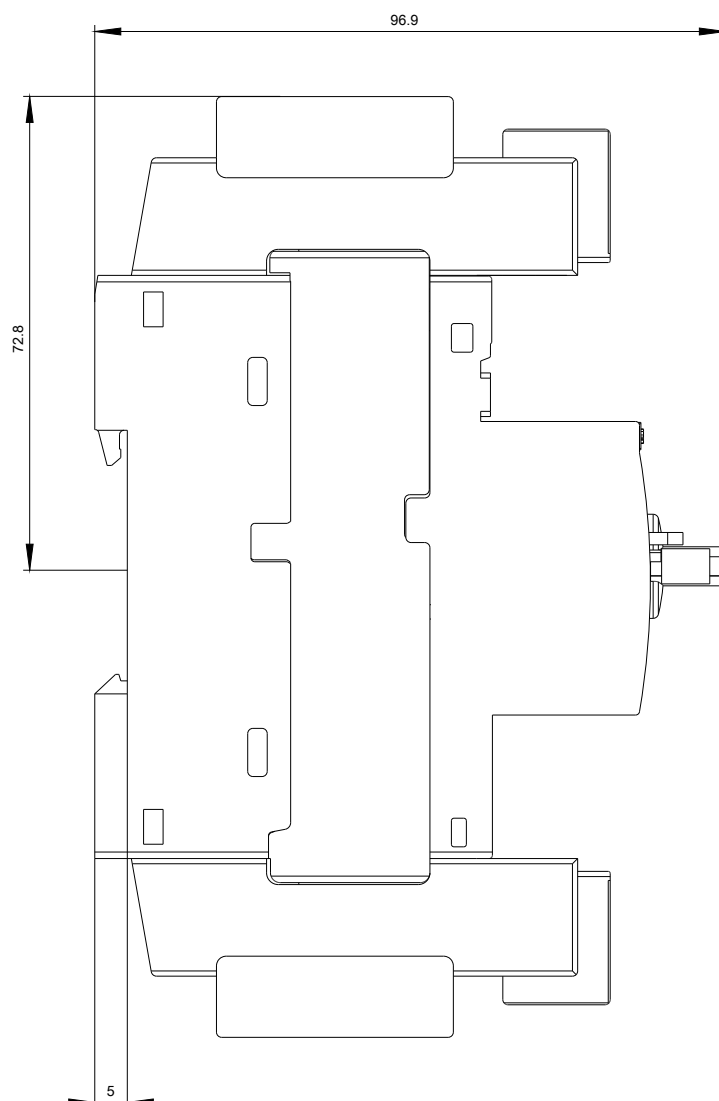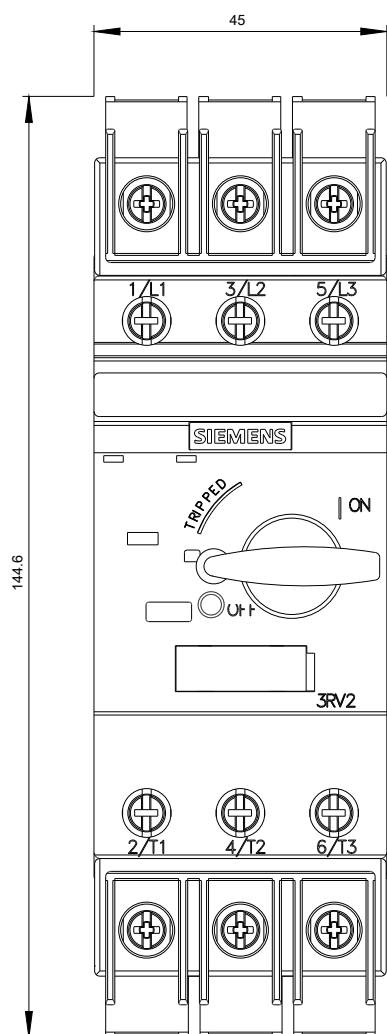

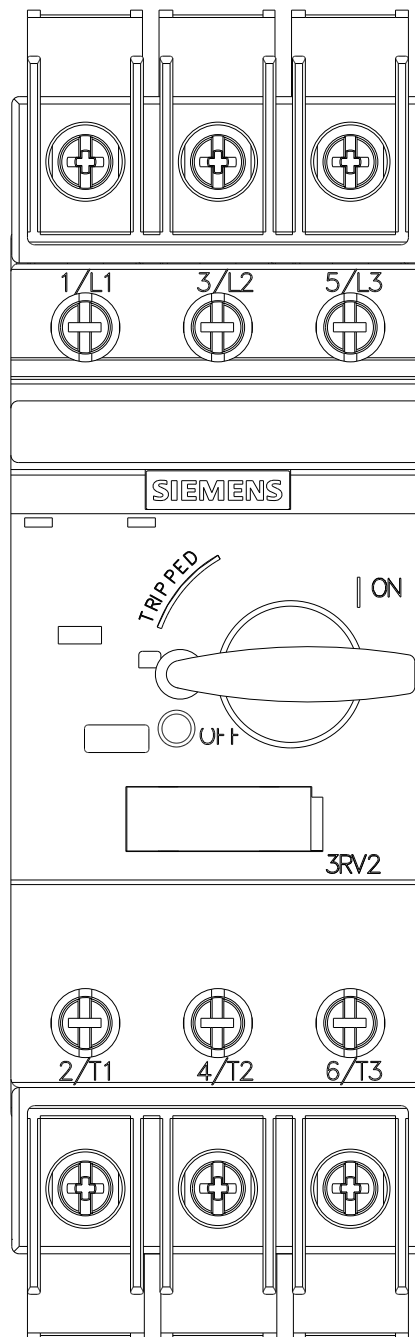



last modified:

03/25/2020