

Circuit breaker size S0 for motor protection, CLASS 10 with overload relay function A-release 10...16 A N-release 208 A screw terminal
Standard switching capacity



| | |
|--------------------------|---|
| Product brand name | SIRIUS |
| Product designation | Circuit breaker |
| Design of the product | For motor protection with overload relay function |
| Product type designation | 3RV2 |

| General technical data | |
|---|---------|
| Size of the circuit-breaker | S0 |
| Size of contactor can be combined company-specific | S00, S0 |
| Product extension | Yes |
| <ul style="list-style-type: none"> Auxiliary switch | Yes |
| Power loss [W] for rated value of the current | |
| <ul style="list-style-type: none"> at AC in hot operating state | 9.25 W |
| <ul style="list-style-type: none"> at AC in hot operating state per pole | 3.1 W |
| Insulation voltage with degree of pollution 3 at AC rated value | 690 V |
| Surge voltage resistance rated value | 6 kV |
| maximum permissible voltage for safe isolation | |
| <ul style="list-style-type: none"> in networks with grounded star point between main and auxiliary circuit | 400 V |

| | |
|---|-------------|
| <ul style="list-style-type: none"> in networks with grounded star point between main and auxiliary circuit | 400 V |
| Protection class IP | |
| <ul style="list-style-type: none"> on the front | IP20 |
| <ul style="list-style-type: none"> of the terminal | IP20 |
| Shock resistance | |
| <ul style="list-style-type: none"> acc. to IEC 60068-2-27 | 25g / 11 ms |
| Mechanical service life (switching cycles) | |
| <ul style="list-style-type: none"> of the main contacts typical | 100 000 |
| <ul style="list-style-type: none"> of auxiliary contacts typical | 100 000 |
| Electrical endurance (switching cycles) | |
| <ul style="list-style-type: none"> typical | 100 000 |
| Reference code acc. to DIN EN 81346-2 | Q |

Ambient conditions

| | |
|--|----------------|
| Installation altitude at height above sea level | |
| <ul style="list-style-type: none"> maximum | 2 000 m |
| Ambient temperature | |
| <ul style="list-style-type: none"> during operation | -20 ... +60 °C |
| <ul style="list-style-type: none"> during storage | -50 ... +80 °C |
| <ul style="list-style-type: none"> during transport | -50 ... +80 °C |
| Temperature compensation | -20 ... +60 °C |
| Relative humidity during operation | 10 ... 95 % |

Main circuit

| | |
|---|---|
| Number of poles for main current circuit | 3 |
| Adjustable pick-up value current of the current-dependent overload release | 10 ... 16 A |
| Operating voltage | |
| <ul style="list-style-type: none"> rated value | 690 V |
| <ul style="list-style-type: none"> at AC-3 rated value maximum | 690 V |
| Operating frequency rated value | 50 ... 60 Hz |
| Operating current rated value | 16 A |
| Operating current | |
| <ul style="list-style-type: none"> at AC-3 <ul style="list-style-type: none"> — at 400 V rated value | 16 A |
| Operating power | |
| <ul style="list-style-type: none"> at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 500 V rated value — at 690 V rated value | 4 000 W 7 500 W 7 500 W 11 000 W |
| Operating frequency | |
| <ul style="list-style-type: none"> at AC-3 maximum | 15 1/h |

| Auxiliary circuit | |
|--|-----------|
| Design of the auxiliary switch | laterally |
| Number of NC contacts for auxiliary contacts | 0 |
| Number of NO contacts for auxiliary contacts | 0 |
| Number of CO contacts | |
| • for auxiliary contacts | 0 |
| Operating current of auxiliary contacts at AC-15 | |
| • at 24 V | 1.5 A |
| • at 230 V | 1.5 A |
| Operating current of auxiliary contacts at DC-13 | |
| • at 24 V | 1 A |

| Protective and monitoring functions | |
|---|----------|
| Product function | |
| • Ground fault detection | No |
| • Phase failure detection | Yes |
| Trip class | CLASS 10 |
| Design of the overload release | thermal |
| Operational short-circuit current breaking capacity (Ics) at AC | |
| • at 240 V rated value | 100 kA |
| • at 400 V rated value | 25 kA |
| • at 500 V rated value | 5 kA |
| • at 690 V rated value | 2 kA |
| Maximum short-circuit current breaking capacity (Icu) | |
| • at AC at 240 V rated value | 100 kA |
| • at AC at 400 V rated value | 55 kA |
| • at AC at 500 V rated value | 10 kA |
| • at AC at 690 V rated value | 4 kA |
| Response value current | |
| • of instantaneous short-circuit trip unit | 208 A |

| UL/CSA ratings | |
|--|------|
| Full-load current (FLA) for three-phase AC motor | |
| • at 480 V rated value | 16 A |
| • at 600 V rated value | 16 A |
| Yielded mechanical performance [hp] | |
| • for single-phase AC motor | |
| — at 110/120 V rated value | 1 hp |
| — at 230 V rated value | 2 hp |
| • for three-phase AC motor | |
| — at 200/208 V rated value | 3 hp |
| — at 220/230 V rated value | 5 hp |

| | |
|--|---|
| — at 460/480 V rated value | 10 hp |
| Contact rating of auxiliary contacts according to UL | C600 / R300 |
| Short-circuit protection | |
| Product function Short circuit protection | Yes |
| Design of the short-circuit trip | magnetic |
| Design of the fuse link • for short-circuit protection of the auxiliary switch required | fuse gL/gG: 6 A, quick: 10 A |
| Design of the fuse link for IT network for short-circuit protection of the main circuit • at 400 V • at 500 V • at 690 V | gL/gG 63 A gL/gG 50 A gL/gG 40 A |
| Installation/ mounting/ dimensions | |
| Mounting position | any |
| Mounting type | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715 |
| Height | 97 mm |
| Width | 65 mm |
| Depth | 97 mm |
| Required spacing • for grounded parts at 400 V — downwards — upwards — Backwards — at the side — forwards • for live parts at 400 V — downwards — upwards — Backwards — at the side — forwards • for grounded parts at 500 V — downwards — upwards — Backwards — at the side — forwards • for live parts at 500 V — downwards | 30 mm 30 mm 0 mm 9 mm 0 mm 30 mm 30 mm 0 mm 9 mm 0 mm 30 mm 30 mm 0 mm 9 mm 0 mm 30 mm |

| | |
|-------------------------------|-------|
| — upwards | 30 mm |
| — Backwards | 0 mm |
| — at the side | 9 mm |
| — forwards | 0 mm |
| • for grounded parts at 690 V | |
| — downwards | 50 mm |
| — upwards | 50 mm |
| — Backwards | 0 mm |
| — at the side | 30 mm |
| — forwards | 0 mm |
| • for live parts at 690 V | |
| — downwards | 50 mm |
| — upwards | 50 mm |
| — Backwards | 0 mm |
| — at the side | 30 mm |







Connections/ Terminals




| | |
|--|---|
| Product function | |
| • removable terminal for auxiliary and control circuit | No |
| Type of electrical connection | |
| • for main current circuit | screw-type terminals |
| • for auxiliary and control current circuit | screw-type terminals |
| Arrangement of electrical connectors for main current circuit | Top and bottom |
| Type of connectable conductor cross-sections | |
| • for main contacts | |
| — single or multi-stranded | 2x (1 ... 2,5 mm ²), 2x (2,5 ... 10 mm ²) |
| — finely stranded with core end processing | 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² |
| • at AWG conductors for main contacts | 2x (16 ... 12), 2x (14 ... 8) |
| Type of connectable conductor cross-sections | |
| • for auxiliary contacts | |
| — single or multi-stranded | 2x (0,5 ... 1,5 mm ²), 2x (0,75 ... 2,5 mm ²) |
| — finely stranded with core end processing | 2x (0.5 ... 1.5 mm ²), 2x (0.75 ... 2.5 mm ²) |
| • at AWG conductors for auxiliary contacts | 2x (20 ... 16), 2x (18 ... 14) |
| Tightening torque | |
| • for main contacts with screw-type terminals | 2 ... 2.5 N·m |
| • for auxiliary contacts with screw-type terminals | 0.8 ... 1.2 N·m |
| Design of screwdriver shaft | Diameter 5 to 6 mm |
| Size of the screwdriver tip | Pozidriv 2 |
| Design of the thread of the connection screw | |
| • for main contacts | M4 |
| • of the auxiliary and control contacts | M3 |






Safety related data

| | |
|--|--------|
| B10 value | |
| <ul style="list-style-type: none"> with high demand rate acc. to SN 31920 | 5 000 |
| Proportion of dangerous failures | |
| <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 | 50 % |
| <ul style="list-style-type: none"> with high demand rate acc. to SN 31920 | 50 % |
| Failure rate [FIT] | |
| <ul style="list-style-type: none"> with low demand rate acc. to SN 31920 | 50 FIT |
| T1 value for proof test interval or service life acc. to IEC 61508 | 10 y |
| Display version | |
| <ul style="list-style-type: none"> for switching status | Handle |

Certificates/ approvals

| | |
|--|---|
| General Product Approval | Declaration of Conformity |
|  CCC |  CSA |
|  UL |  KC |
| |  EAC |
| |  EG-Konf. |

| | | |
|----------------------------------|--|---|
| Declaration of Conformity | Test Certificates | Marine / Shipping |
| Miscellaneous | Special Test Certificate | Type Test Certificates/Test Report |
| | |  ABS |
| | |  BUREAU VERITAS |
| | |  LRS |

| | |
|--|--|
| Marine / Shipping | other |
|  PRS | Confirmation |
|  RINA |  VDE |
|  RMRS | |
|  TYPE-APPROVED PRODUCT DNV-GL DNVGL.COM/AF | |

| |
|-------------------------------------|
| Railway |
| Vibration and Shock |
| Confirmation |

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2121-4AA10>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2121-4AA10>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2121-4AA10>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2121-4AA10&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RV2121-4AA10/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2121-4AA10&objecttype=14&gridview=view1>

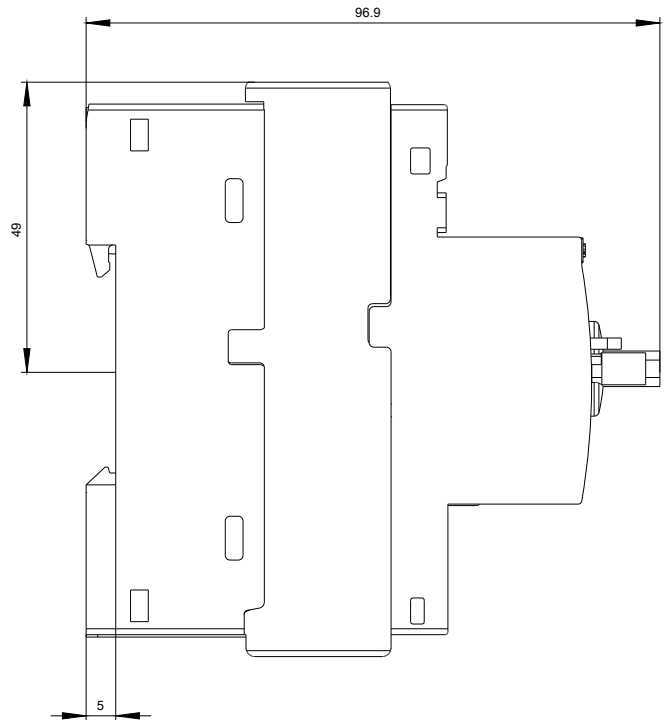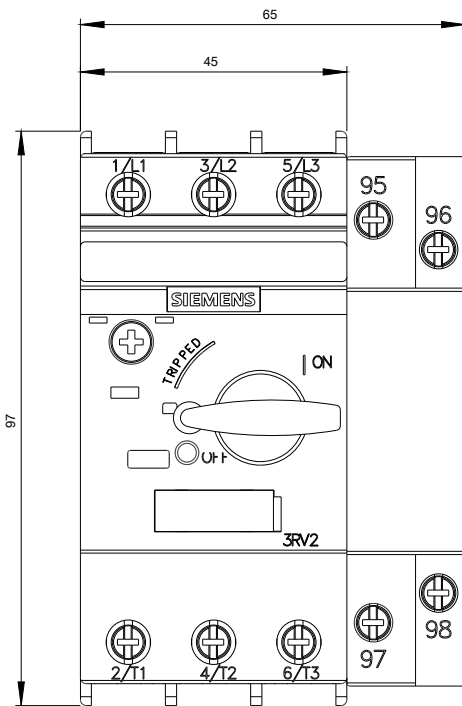

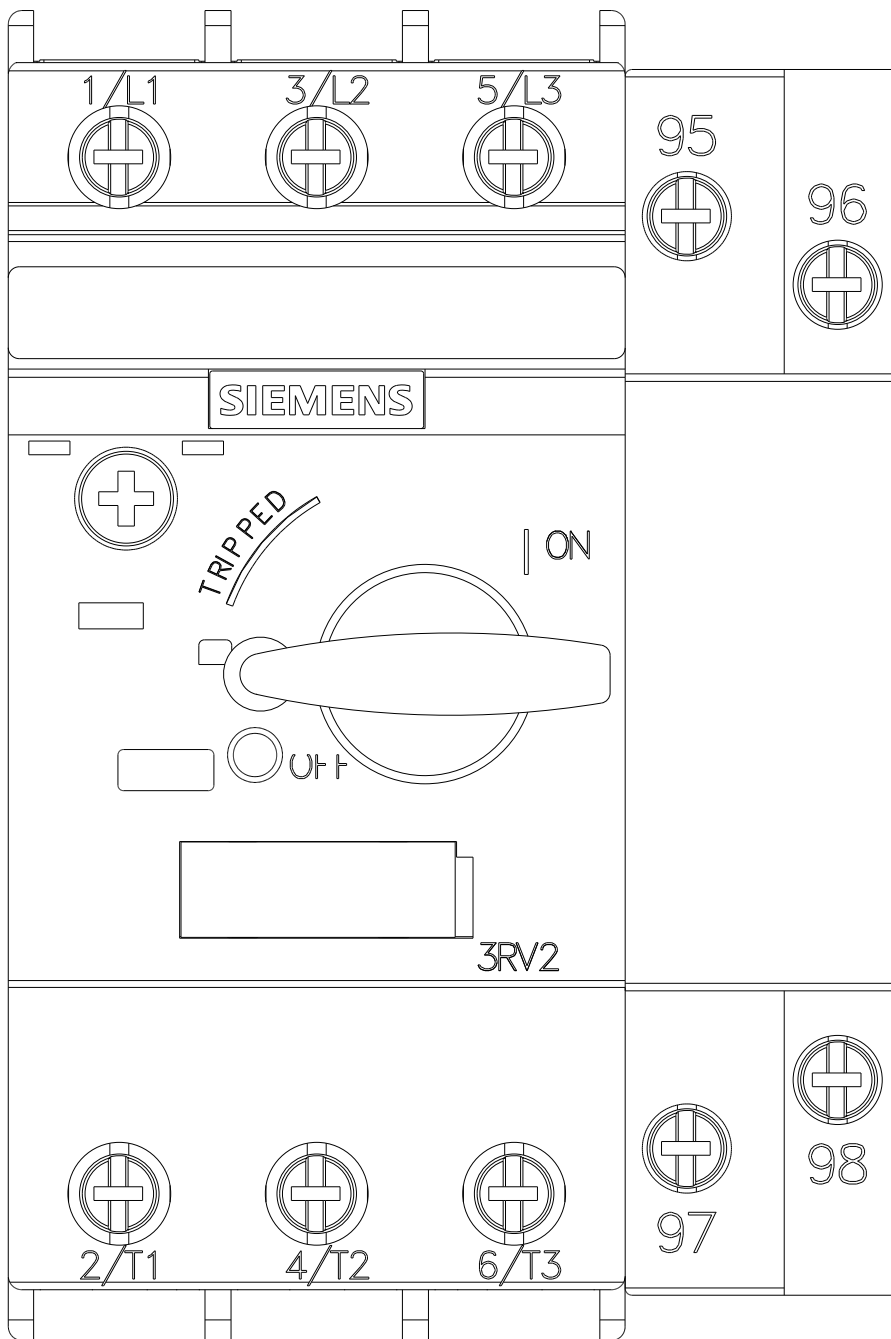

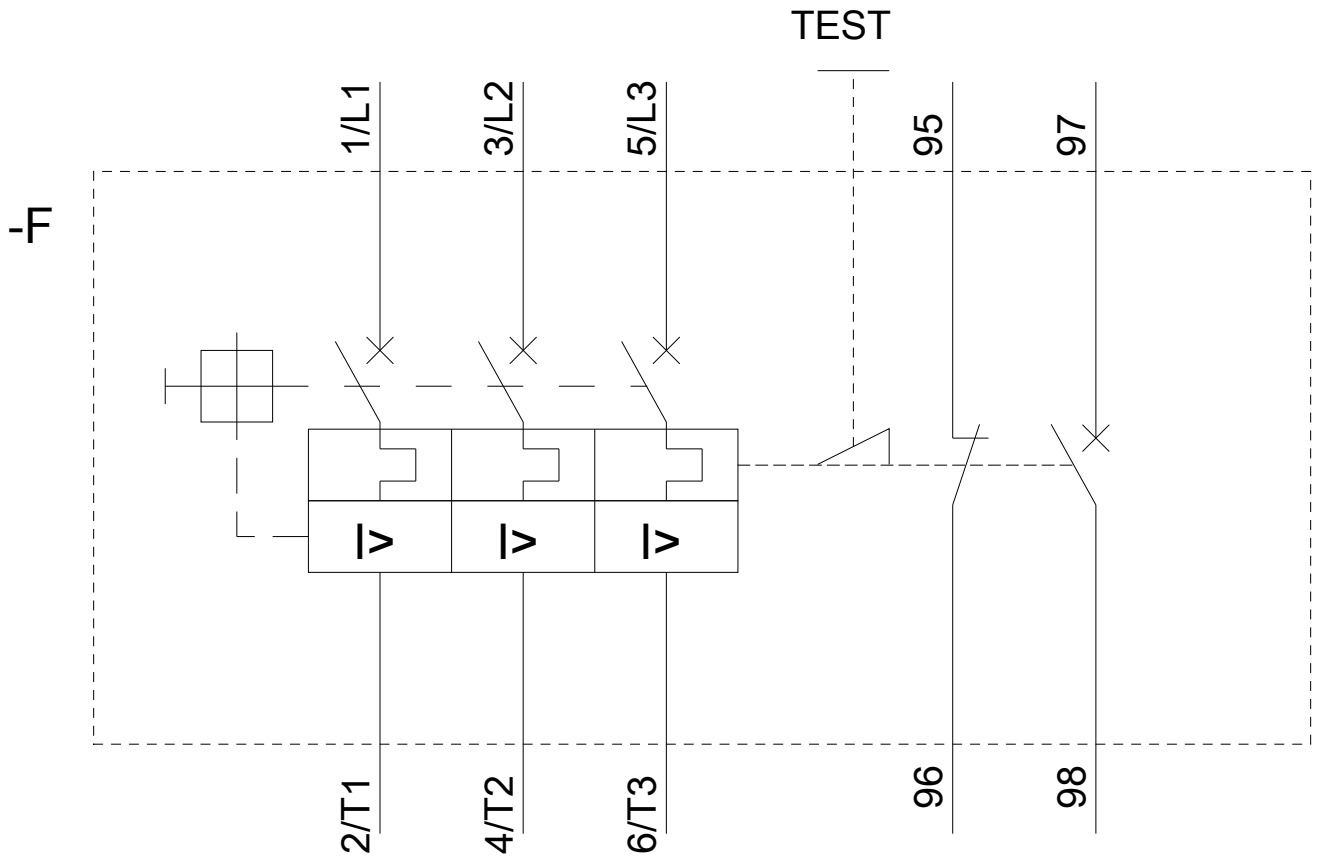

last modified:

03/20/2020