

Overload relay 12.5...50 A Electronic For motor protection Size S2,  
Class 20E Contactor mounting Main circuit: Screw Auxiliary circuit:  
Spring-type terminal Manual-Automatic-Reset



Product brand name	SIRIUS
Product designation	solid-state overload relay
Product type designation	3RB3
General technical data	
Size of overload relay	S2
Size of contactor can be combined company-specific	S2
Power loss [W] for rated value of the current	
• at AC in hot operating state	1.8 W
• at AC in hot operating state per pole	0.6 W
Insulation voltage with degree of pollution 3 at AC rated value	690 V
Surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation	
• in networks with grounded star point between auxiliary and auxiliary circuit	300 V
• in networks with grounded star point between auxiliary and auxiliary circuit	300 V
• in networks with grounded star point between main and auxiliary circuit	600 V

<ul style="list-style-type: none"> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul>	690 V
<b>Protection class IP</b>	
<ul style="list-style-type: none"> <li>on the front</li> </ul>	IP20
<ul style="list-style-type: none"> <li>of the terminal</li> </ul>	IP00
<b>Shock resistance</b>	15g / 11 ms
<ul style="list-style-type: none"> <li>acc. to IEC 60068-2-27</li> </ul>	15g / 11 ms; Signaling contact 97 / 98 in position "Tripped": 8g / 11 ms
<b>Vibration resistance</b>	1-6 Hz, 15 mm; 6-500 Hz, 20 m/s <sup>2</sup> ; 10 cycles
<b>Thermal current</b>	50 A
<b>Recovery time</b>	
<ul style="list-style-type: none"> <li>after overload trip with automatic reset typical</li> </ul>	3 min
<ul style="list-style-type: none"> <li>after overload trip with remote-reset</li> </ul>	0 min
<ul style="list-style-type: none"> <li>after overload trip with manual reset</li> </ul>	0 min
<b>Type of protection according to ATEX directive 2014/34/EU</b>	Ex II (2) G [Ex e] [Ex d] [Ex px] ; Ex II (2) D [Ex t] [Ex p]
Certificate of suitability according to ATEX directive 2014/34/EU	PTB 09 ATEX 3001
<b>Reference code acc. to DIN EN 81346-2</b>	F

#### Ambient conditions

<b>Installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>maximum</li> </ul>	2 000 m
<b>Ambient temperature</b>	
<ul style="list-style-type: none"> <li>during operation</li> </ul>	-25 ... +60 °C
<ul style="list-style-type: none"> <li>during storage</li> </ul>	-40 ... +80 °C
<ul style="list-style-type: none"> <li>during transport</li> </ul>	-40 ... +80 °C
<b>Temperature compensation</b>	-25 ... +60 °C
Relative humidity during operation	10 ... 95 %

#### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Adjustable pick-up value current of the current-dependent overload release</b>	12.5 ... 50 A
<b>Operating voltage</b>	
<ul style="list-style-type: none"> <li>rated value</li> </ul>	690 V
<ul style="list-style-type: none"> <li>at AC-3 rated value maximum</li> </ul>	690 V
<b>Operating frequency rated value</b>	50 ... 60 Hz
<b>Operating current rated value</b>	50 A
<b>Operating power</b>	
<ul style="list-style-type: none"> <li>for three-phase motors at 400 V at 50 Hz</li> </ul>	7.5 ... 22 kW
<ul style="list-style-type: none"> <li>for AC motors at 500 V at 50 Hz</li> </ul>	11 ... 30 kW
<ul style="list-style-type: none"> <li>for AC motors at 690 V at 50 Hz</li> </ul>	11 ... 45 kW

#### Auxiliary circuit

<b>Design of the auxiliary switch</b>	integrated
<b>Number of NC contacts for auxiliary contacts</b> • Note	1 for contactor disconnection
<b>Number of NO contacts for auxiliary contacts</b> • Note	1 for message "tripped"
<b>Number of CO contacts</b> • for auxiliary contacts	0
<b>Operating current of auxiliary contacts at AC-15</b> • at 24 V • at 110 V • at 120 V • at 125 V • at 230 V	4 A 4 A 4 A 4 A 3 A
<b>Operating current of auxiliary contacts at DC-13</b> • at 24 V • at 60 V • at 110 V • at 125 V • at 220 V	2 A 0.55 A 0.3 A 0.3 A 0.11 A

#### Protective and monitoring functions

<b>Trip class</b>	CLASS 20E
<b>Design of the overload release</b>	electronic

#### UL/CSA ratings

<b>Full-load current (FLA) for three-phase AC motor</b> • at 480 V rated value • at 600 V rated value	50 A 50 A
<b>Contact rating of auxiliary contacts according to UL</b>	B600 / R300

#### Short-circuit protection

<b>Design of the fuse link</b> • for short-circuit protection of the main circuit — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required	gG: 250 A gG: 200 A fuse gG: 6 A
---	--

#### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Mounting type</b>	Contactor mounting
<b>Height</b>	99 mm
<b>Width</b>	55 mm
<b>Depth</b>	104 mm

## Connections/ Terminals

<b>Product function</b> <ul style="list-style-type: none"> <li>removable terminal for auxiliary and control circuit</li> </ul>	Yes
<b>Type of electrical connection</b> <ul style="list-style-type: none"> <li>for main current circuit</li> <li>for auxiliary and control current circuit</li> </ul>	screw-type terminals spring-loaded terminals
<b>Arrangement of electrical connectors for main current circuit</b>	Top and bottom
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for main contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— stranded</li> <li>— finely stranded with core end processing</li> </ul> </li> <li>at AWG conductors for main contacts</li> </ul>	1x (1 ... 50 mm <sup>2</sup> ), 2x (1 ... 35 mm <sup>2</sup> ) 2x (10 ... 35 mm <sup>2</sup> ), 1x 50 mm <sup>2</sup> 1x (1 ... 35 mm <sup>2</sup> ), 2x (1 ... 25 mm <sup>2</sup> ) 2x (18 ... 2), 1x (18 ... 1)
<b>Type of connectable conductor cross-sections</b> <ul style="list-style-type: none"> <li>for auxiliary contacts <ul style="list-style-type: none"> <li>— solid</li> <li>— single or multi-stranded</li> <li>— finely stranded with core end processing</li> <li>— finely stranded without core end processing</li> </ul> </li> <li>at AWG conductors for auxiliary contacts</li> </ul>	2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0,25 ... 1,5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 1.5 mm <sup>2</sup> ) 1x (24 ... 16), 2x (24 ... 16)
<b>Tightening torque</b> <ul style="list-style-type: none"> <li>for main contacts with screw-type terminals</li> </ul>	3 ... 4.5 N·m
<b>Design of screwdriver shaft</b>	Diameter 5 to 6 mm
<b>Size of the screwdriver tip</b>	Pozidriv PZ 2
<b>Design of the thread of the connection screw</b> <ul style="list-style-type: none"> <li>for main contacts</li> </ul>	M6

## Communication/ Protocol

<b>Type of voltage supply via input/output link master</b>	No
--	----

## Electromagnetic compatibility

<b>Conducted interference</b> <ul style="list-style-type: none"> <li>due to burst acc. to IEC 61000-4-4</li> <li>due to conductor-earth surge acc. to IEC 61000-4-5</li> <li>due to conductor-conductor surge acc. to IEC 61000-4-5</li> <li>due to high-frequency radiation acc. to IEC 61000-4-6</li> </ul>	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3 2 kV (line to earth) corresponds to degree of severity 3 1 kV (line to line) corresponds to degree of severity 3 10 V in frequency range 0.15 to 80 MHz, modulation 80 % AM with 1 kHz
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m

Electrostatic discharge acc. to IEC 61000-4-2

6 kV contact discharge / 8 kV air discharge

## Display

## Display version

- for switching status

Slide switch

## Certificates/ approvals

## General Product Approval

## EMC

For use in hazardous locations



CCC



CSA



UL



RCM



ATEX

## Declaration of Conformity

## Test Certificates

## Marine / Shipping



EG-Konf.

[Miscellaneous](#)
[Type Test Certificates/Test Report](#)
[Special Test Certificate](#)


ABS



LRS

## Marine / Shipping

## other



PRS



RINA



RMRS



DNVGL.COM/AF

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB3036-2UD0>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB3036-2UD0>

Service&amp;Support (Manuals, Certificates, Characteristics, FAQs,...)



<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-2UD0>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB3036-2UD0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB3036-2UD0&lang=en)
Characteristic: Tripping characteristics, I<sub>t</sub>, Let-through current
<https://support.industry.siemens.com/cs/ww/en/ps/3RB3036-2UD0/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB3036-2UD0&objecttype=14&gridview=view1>

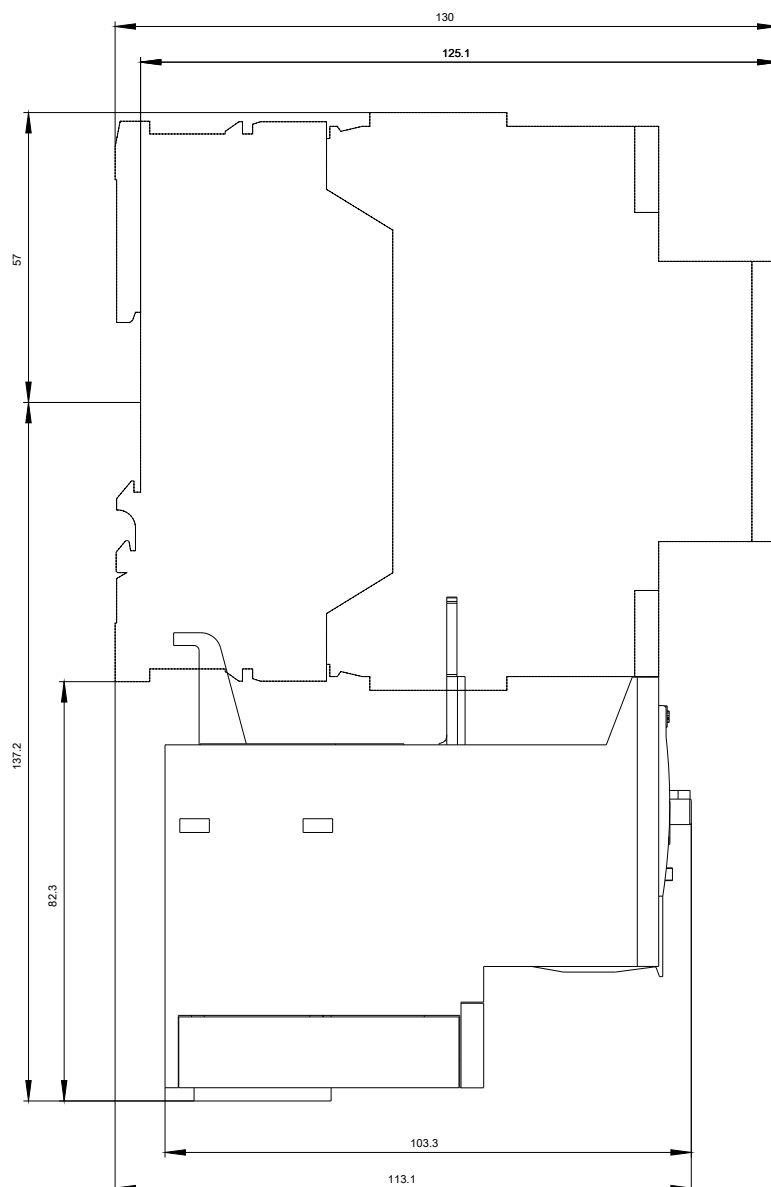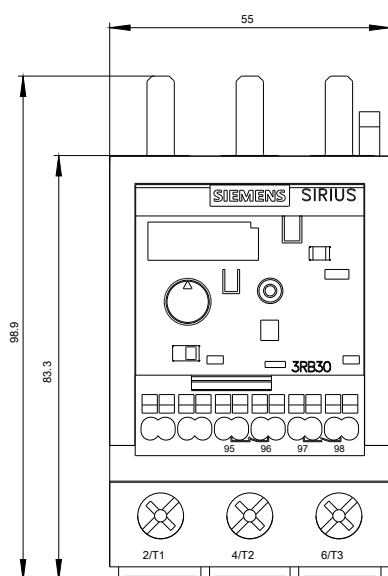

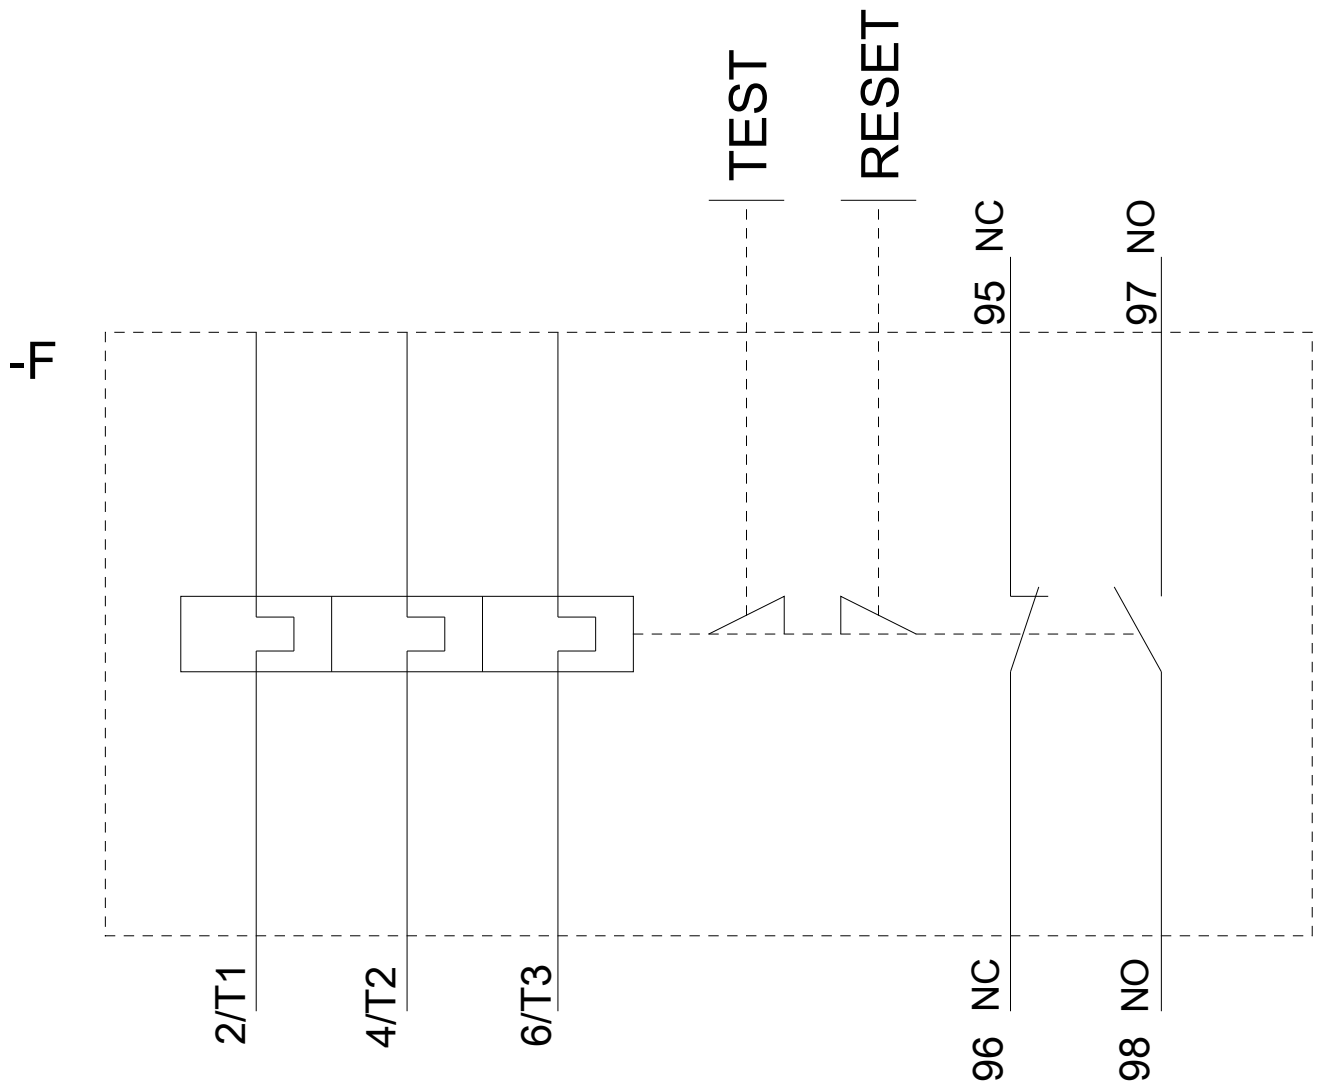

last modified:

04/07/2020