

Circuit breaker size S0 for motor protection, CLASS 10 A-release  
1.1...1.6 A N-release 21 A screw terminal Standard switching  
capacity with transverse auxiliary switches 1 NO+1 NC



|                          |                      |
|--------------------------|----------------------|
| Product brand name       | SIRIUS               |
| Product designation      | Circuit breaker      |
| Design of the product    | For motor protection |
| Product type designation | 3RV2                 |

| General technical data                                                                                                    |         |
|---------------------------------------------------------------------------------------------------------------------------|---------|
| Size of the circuit-breaker                                                                                               | S0      |
| Size of contactor can be combined company-specific                                                                        | S00, S0 |
| Product extension                                                                                                         | Yes     |
| <ul style="list-style-type: none"> <li>Auxiliary switch</li> </ul>                                                        |         |
| Power loss [W] for rated value of the current                                                                             |         |
| <ul style="list-style-type: none"> <li>at AC in hot operating state</li> </ul>                                            | 7.25 W  |
| <ul style="list-style-type: none"> <li>at AC in hot operating state per pole</li> </ul>                                   | 2.4 W   |
| Insulation voltage with degree of pollution 3 at AC rated value                                                           | 690 V   |
| Surge voltage resistance rated value                                                                                      | 6 kV    |
| maximum permissible voltage for safe isolation                                                                            |         |
| <ul style="list-style-type: none"> <li>in networks with grounded star point between main and auxiliary circuit</li> </ul> | 400 V   |

|                                                                                                                             |                   |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------|
| <ul style="list-style-type: none"> <li>• in networks with grounded star point between main and auxiliary circuit</li> </ul> | 400 V             |
| <b>Protection class IP</b>                                                                                                  |                   |
| <ul style="list-style-type: none"> <li>• on the front</li> </ul>                                                            | IP20              |
| <ul style="list-style-type: none"> <li>• of the terminal</li> </ul>                                                         | IP20              |
| <b>Shock resistance</b>                                                                                                     |                   |
| <ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> </ul>                                                  | 25g / 11 ms       |
| <b>Mechanical service life (switching cycles)</b>                                                                           |                   |
| <ul style="list-style-type: none"> <li>• of the main contacts typical</li> </ul>                                            | 100 000           |
| <ul style="list-style-type: none"> <li>• of auxiliary contacts typical</li> </ul>                                           | 100 000           |
| <b>Electrical endurance (switching cycles)</b>                                                                              |                   |
| <ul style="list-style-type: none"> <li>• typical</li> </ul>                                                                 | 100 000           |
| <b>Type of protection according to ATEX directive 2014/34/EU</b>                                                            | Ex II (2) GD      |
| Certificate of suitability according to ATEX directive 2014/34/EU                                                           | DMT 02 ATEX F 001 |
| <b>Reference code acc. to DIN EN 81346-2</b>                                                                                | Q                 |

#### Ambient conditions

|                                                                      |                |
|----------------------------------------------------------------------|----------------|
| <b>Installation altitude at height above sea level</b>               |                |
| <ul style="list-style-type: none"> <li>• maximum</li> </ul>          | 2 000 m        |
| <b>Ambient temperature</b>                                           |                |
| <ul style="list-style-type: none"> <li>• during operation</li> </ul> | -20 ... +60 °C |
| <ul style="list-style-type: none"> <li>• during storage</li> </ul>   | -50 ... +80 °C |
| <ul style="list-style-type: none"> <li>• during transport</li> </ul> | -50 ... +80 °C |
| <b>Temperature compensation</b>                                      | -20 ... +60 °C |
| Relative humidity during operation                                   | 10 ... 95 %    |

#### Main circuit

|                                                                                                                                                                       |                |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| <b>Number of poles for main current circuit</b>                                                                                                                       | 3              |
| <b>Adjustable pick-up value current of the current-dependent overload release</b>                                                                                     | 1.1 ... 1.6 A  |
| <b>Operating voltage</b>                                                                                                                                              |                |
| <ul style="list-style-type: none"> <li>• rated value</li> </ul>                                                                                                       | 690 V          |
| <ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>                                                                                       | 690 V          |
| <b>Operating frequency rated value</b>                                                                                                                                | 50 ... 60 Hz   |
| <b>Operating current rated value</b>                                                                                                                                  | 1.6 A          |
| <b>Operating current</b>                                                                                                                                              |                |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> </ul>                                 | 1.6 A          |
| <b>Operating power</b>                                                                                                                                                |                |
| <ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 230 V rated value</li> <li>— at 400 V rated value</li> </ul> </li> </ul> | 250 W<br>550 W |

|                                                                        |            |
|------------------------------------------------------------------------|------------|
| — at 500 V rated value                                                 | 750 W      |
| — at 690 V rated value                                                 | 1 100 W    |
| <b>Operating frequency</b>                                             |            |
| • at AC-3 maximum                                                      | 15 1/h     |
| <b>Auxiliary circuit</b>                                               |            |
| <b>Design of the auxiliary switch</b>                                  | transverse |
| <b>Number of NC contacts for auxiliary contacts</b>                    | 1          |
| <b>Number of NO contacts for auxiliary contacts</b>                    | 1          |
| <b>Number of CO contacts</b>                                           |            |
| • for auxiliary contacts                                               | 0          |
| <b>Operating current of auxiliary contacts at AC-15</b>                |            |
| • at 24 V                                                              | 2 A        |
| • at 120 V                                                             | 0.5 A      |
| • at 125 V                                                             | 0.5 A      |
| • at 230 V                                                             | 0.5 A      |
| <b>Operating current of auxiliary contacts at DC-13</b>                |            |
| • at 24 V                                                              | 1 A        |
| • at 60 V                                                              | 0.15 A     |
| <b>Protective and monitoring functions</b>                             |            |
| <b>Product function</b>                                                |            |
| • Ground fault detection                                               | No         |
| • Phase failure detection                                              | Yes        |
| <b>Trip class</b>                                                      | CLASS 10   |
| <b>Design of the overload release</b>                                  | thermal    |
| <b>Operational short-circuit current breaking capacity (Ics) at AC</b> |            |
| • at 240 V rated value                                                 | 100 kA     |
| • at 400 V rated value                                                 | 100 kA     |
| • at 500 V rated value                                                 | 100 kA     |
| • at 690 V rated value                                                 | 100 kA     |
| <b>Maximum short-circuit current breaking capacity (Icu)</b>           |            |
| • at AC at 240 V rated value                                           | 100 kA     |
| • at AC at 400 V rated value                                           | 100 kA     |
| • at AC at 500 V rated value                                           | 100 kA     |
| • at AC at 690 V rated value                                           | 100 kA     |
| <b>Response value current</b>                                          |            |
| • of instantaneous short-circuit trip unit                             | 21 A       |
| <b>UL/CSA ratings</b>                                                  |            |
| <b>Full-load current (FLA) for three-phase AC motor</b>                |            |
| • at 480 V rated value                                                 | 1.6 A      |
| • at 600 V rated value                                                 | 1.6 A      |

|                                                                                                                                                                                                                                                                                                               |                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------|
| <b>Yielded mechanical performance [hp]</b>                                                                                                                                                                                                                                                                    |                                  |
| <ul style="list-style-type: none"> <li>• for single-phase AC motor <ul style="list-style-type: none"> <li>— at 230 V rated value</li> </ul> </li> <li>• for three-phase AC motor <ul style="list-style-type: none"> <li>— at 460/480 V rated value</li> <li>— at 575/600 V rated value</li> </ul> </li> </ul> | 0.1 hp<br><br>0.75 hp<br>0.75 hp |
| <b>Contact rating of auxiliary contacts according to UL</b>                                                                                                                                                                                                                                                   | C300 / R300                      |

|                                                                                                                   |                                                                                         |
|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Short-circuit protection</b>                                                                                   |                                                                                         |
| <b>Product function Short circuit protection</b>                                                                  | Yes                                                                                     |
| <b>Design of the short-circuit trip</b>                                                                           | magnetic                                                                                |
| <b>Design of the fuse link</b>                                                                                    |                                                                                         |
| <ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch required</li> </ul> | Fuse gL/gG: 10 A, miniature circuit breaker C 6 A (short-circuit current $I_k < 400$ A) |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                                                                                                 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Installation/ mounting/ dimensions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                 |
| <b>Mounting position</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | any                                                                                                                                             |
| <b>Mounting type</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 60715                                                          |
| <b>Height</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 97 mm                                                                                                                                           |
| <b>Width</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 45 mm                                                                                                                                           |
| <b>Depth</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 97 mm                                                                                                                                           |
| <b>Required spacing</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                                                                                                 |
| <ul style="list-style-type: none"> <li>• for grounded parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— Backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 400 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— Backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for grounded parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> <li>— upwards</li> <li>— Backwards</li> <li>— at the side</li> <li>— forwards</li> </ul> </li> <li>• for live parts at 500 V <ul style="list-style-type: none"> <li>— downwards</li> </ul> </li> </ul> | 30 mm<br>30 mm<br>0 mm<br>9 mm<br>0 mm<br><br>30 mm<br>30 mm<br>0 mm<br>9 mm<br>0 mm<br><br>30 mm<br>30 mm<br>0 mm<br>9 mm<br>0 mm<br><br>30 mm |

|                               |       |
|-------------------------------|-------|
| — upwards                     | 30 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 9 mm  |
| — forwards                    | 0 mm  |
| • for grounded parts at 690 V |       |
| — downwards                   | 50 mm |
| — upwards                     | 50 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |
| — forwards                    | 0 mm  |
| • for live parts at 690 V     |       |
| — downwards                   | 50 mm |
| — upwards                     | 50 mm |
| — Backwards                   | 0 mm  |
| — at the side                 | 30 mm |

## Connections/ Terminals

|                                                                      |                                                                                         |
|----------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
| <b>Product function</b>                                              |                                                                                         |
| • removable terminal for auxiliary and control circuit               | No                                                                                      |
| <b>Type of electrical connection</b>                                 |                                                                                         |
| • for main current circuit                                           | screw-type terminals                                                                    |
| • for auxiliary and control current circuit                          | screw-type terminals                                                                    |
| <b>Arrangement of electrical connectors for main current circuit</b> | Top and bottom                                                                          |
| <b>Type of connectable conductor cross-sections</b>                  |                                                                                         |
| • for main contacts                                                  |                                                                                         |
| — single or multi-stranded                                           | 2x (1 ... 2,5 mm <sup>2</sup> ), 2x (2,5 ... 10 mm <sup>2</sup> )                       |
| — finely stranded with core end processing                           | 2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup> |
| • at AWG conductors for main contacts                                | 2x (16 ... 12), 2x (14 ... 8)                                                           |
| <b>Type of connectable conductor cross-sections</b>                  |                                                                                         |
| • for auxiliary contacts                                             |                                                                                         |
| — single or multi-stranded                                           | 2x (0,5 ... 1,5 mm <sup>2</sup> ), 2x (0,75 ... 2,5 mm <sup>2</sup> )                   |
| — finely stranded with core end processing                           | 2x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.75 ... 2.5 mm <sup>2</sup> )                   |
| • at AWG conductors for auxiliary contacts                           | 2x (20 ... 16), 2x (18 ... 14)                                                          |
| <b>Tightening torque</b>                                             |                                                                                         |
| • for main contacts with screw-type terminals                        | 2 ... 2.5 N·m                                                                           |
| • for auxiliary contacts with screw-type terminals                   | 0.8 ... 1.2 N·m                                                                         |
| <b>Design of screwdriver shaft</b>                                   | Diameter 5 to 6 mm                                                                      |
| <b>Size of the screwdriver tip</b>                                   | Pozidriv 2                                                                              |
| <b>Design of the thread of the connection screw</b>                  |                                                                                         |
| • for main contacts                                                  | M4                                                                                      |
| • of the auxiliary and control contacts                              | M3                                                                                      |

## Safety related data

|                                                                           |        |
|---------------------------------------------------------------------------|--------|
| <b>B10 value</b>                                                          |        |
| • with high demand rate acc. to SN 31920                                  | 5 000  |
| <b>Proportion of dangerous failures</b>                                   |        |
| • with low demand rate acc. to SN 31920                                   | 50 %   |
| • with high demand rate acc. to SN 31920                                  | 50 %   |
| <b>Failure rate [FIT]</b>                                                 |        |
| • with low demand rate acc. to SN 31920                                   | 50 FIT |
| <b>T1 value for proof test interval or service life acc. to IEC 61508</b> | 10 y   |
| <b>Display version</b>                                                    |        |
| • for switching status                                                    | Handle |

## Certificates/ approvals

| General Product Approval                                                                 | For use in hazardous locations                                                               |
|------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| <br>CCC | <br>CSA     |
| <br>UL  | <br>EAC     |
|                                                                                          | <br>ATEX  |
|                                                                                          | <br>IECEx |

| Declaration of Conformity                                                                       | Test Certificates                                                                                                               | Marine / Shipping                                                                                       |
|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------|
| <br>EG-Konf. | <a href="#">Miscellaneous</a><br><a href="#">Type Test Certificates/Test Report</a><br><a href="#">Special Test Certificate</a> | <br>ABS            |
|                                                                                                 |                                                                                                                                 | <br>BUREAU VERITAS |

| Marine / Shipping                                                                                               | other                        |
|-----------------------------------------------------------------------------------------------------------------|------------------------------|
| <br>LRS                      | <a href="#">Confirmation</a> |
| <br>PRS                      |                              |
| <br>RINA                     |                              |
| <br>RMRS                     |                              |
| <br>DNV-GL<br>DNVGL.COM/AF |                              |

| other                                                                                      | Railway                                                             |
|--------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| <br>VDE | <a href="#">Vibration and Shock</a><br><a href="#">Confirmation</a> |

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2021-1AA15>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2021-1AA15>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1AA15>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RV2021-1AA15&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2021-1AA15&lang=en)


**Characteristic: Tripping characteristics,  $I^2t$ , Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RV2021-1AA15/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2021-1AA15&objecttype=14&gridview=view1>

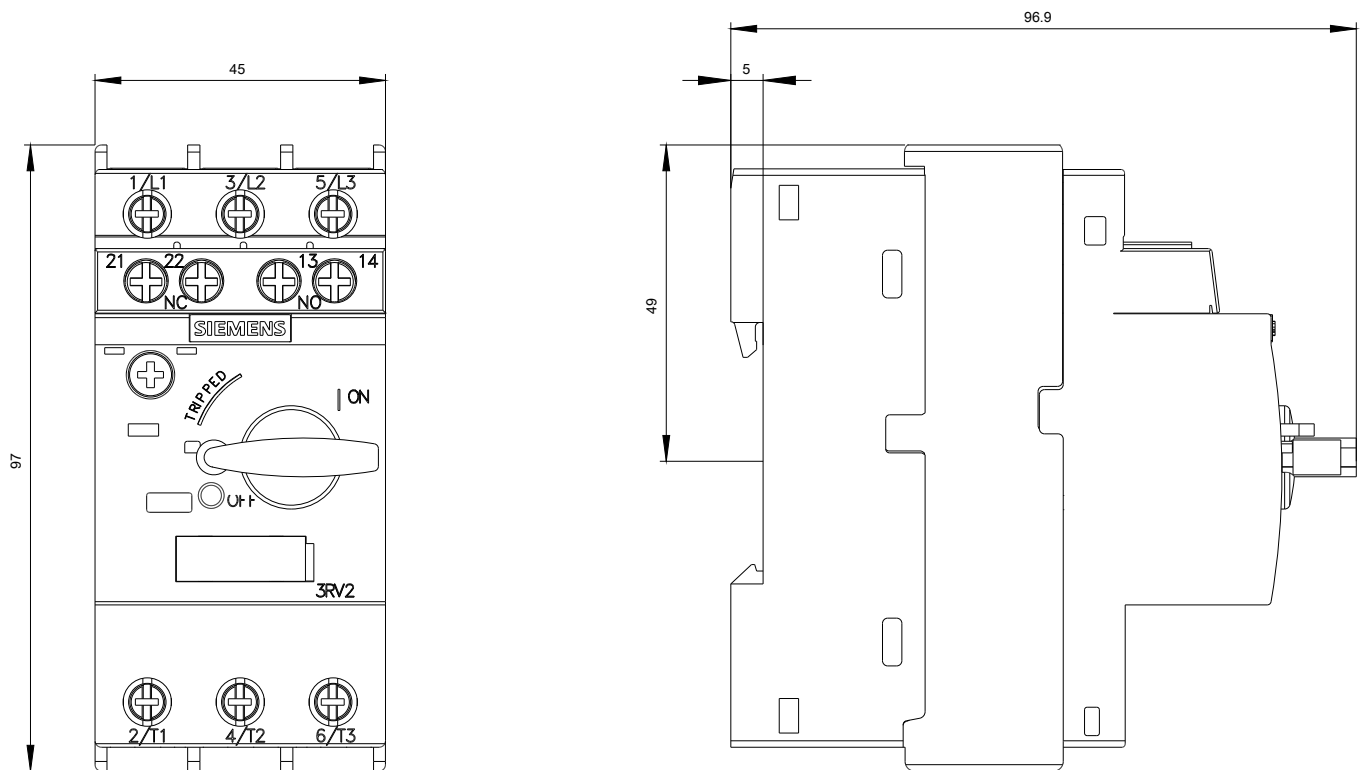

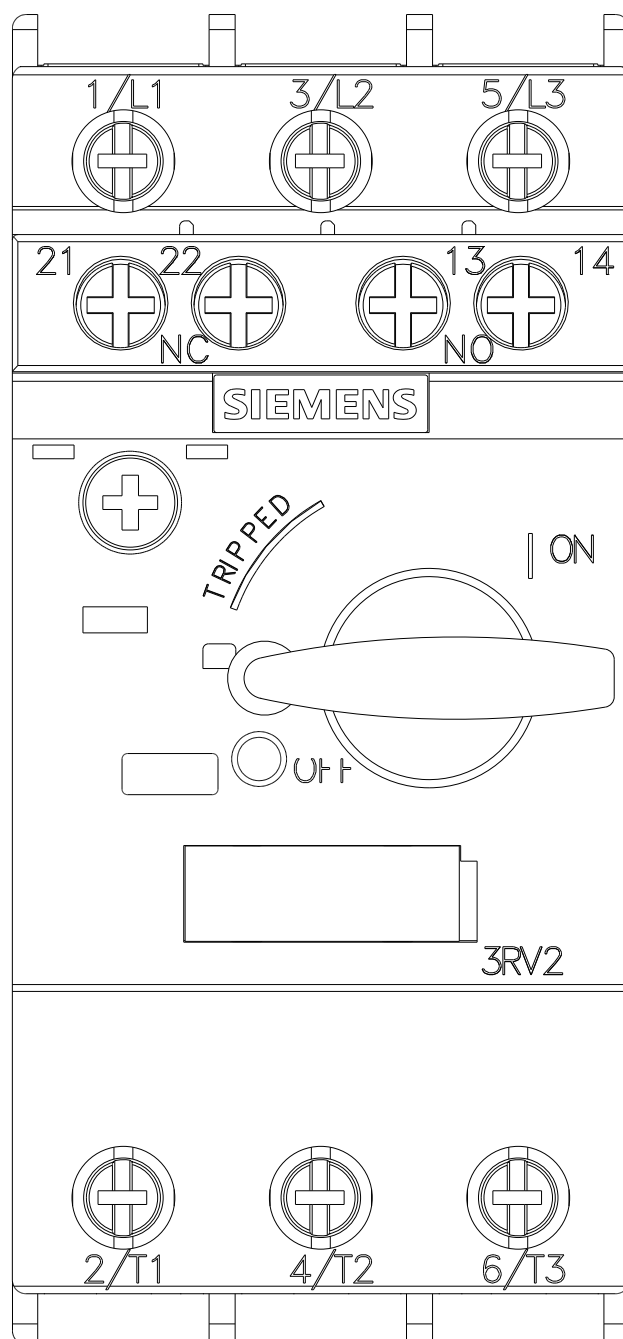

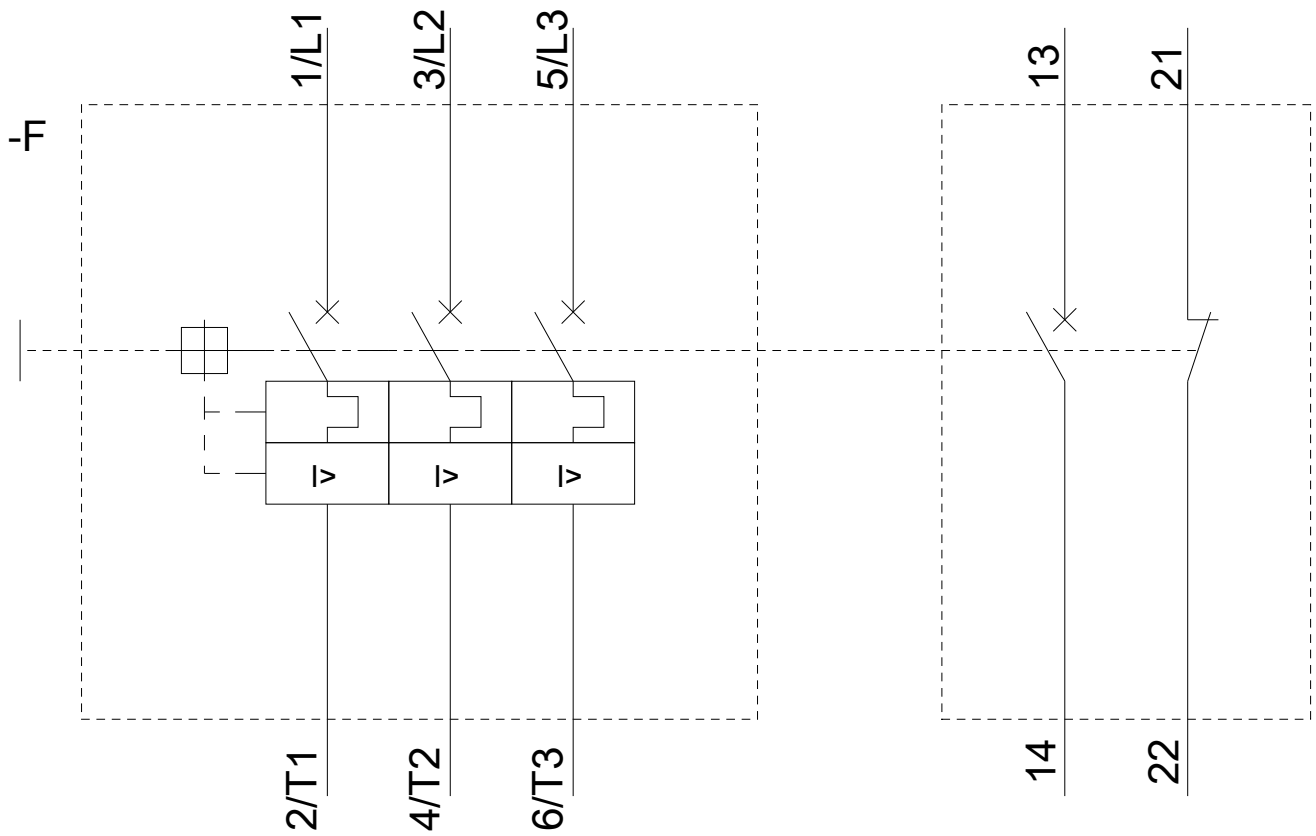

last modified:

03/11/2020