



AS-i compact module K60 analog 4 AI, IP67 4 x input, current 4..20 mA, +/- 20 mA for 4-wire sensors 4 x M12 socket Mounting plate 3RK1901-0CA00 must be ordered separately

General technical data		
Design of the product		analog I/O modules for operation in the field, IP67 - K60
Type of device		analog input modules for current measurement
Type		4 inputs
Design of the slave type		analog slave
I/O configuration		7
ID code		3
Type of electrical connection of the inputs and outputs		M12 screw-type terminals
Consumed current from profile conductors of the AS-Interface at 30 V maximum	mA	160
operating voltage according to AS-Interface spezifikation	V	26.5 ... 31.6
Current consumption when connected		
• 2 sensors		
— without Uaux infeed max	mA	46
— from Uaux infeed max.	mA	500
Voltage supply auxiliary voltage additional for sensors Uaux	V	24 ... 30

Profile		7.3
Measuring/output value		current
Measuring/output range		adjustable: 4 ... 20 mA / +-20 mA
Smoothing function		configurable
Line filter	Hz	50
Channels active		4
A/D resolution for analog inputs/outputs	bit	16
Type of connection		4-conductor

Inputs		
Number of analog inputs		4
Inputs sensors		2/3/4-conductor sensors
Input variable		mA
Product function input variable parameterizable		Yes
Number of analog outputs		0
Output quantity		mA
Status display		
- AUX PWR (Uaux) - AS-Interface - FAULT		green LED green LED red LED

Ambient conditions		
Ambient temperature		
- during operation - during storage	°C °C	-20 ... +60 -40 ... +85
Protection class IP		IP67

Mechanical data		
Width	mm	60
Height	mm	152
Depth	mm	29
Mounting type		standard rail mounting/wall mounting using mounting plate for K60 compact module

Certificates/ approvals		
-------------------------	--	--

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

Shipping Approval



other



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1207-1BQ44-0AA3>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RK1207-1BQ44-0AA3>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RK1207-1BQ44-0AA3>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1207-1BQ44-0AA3&lang=en

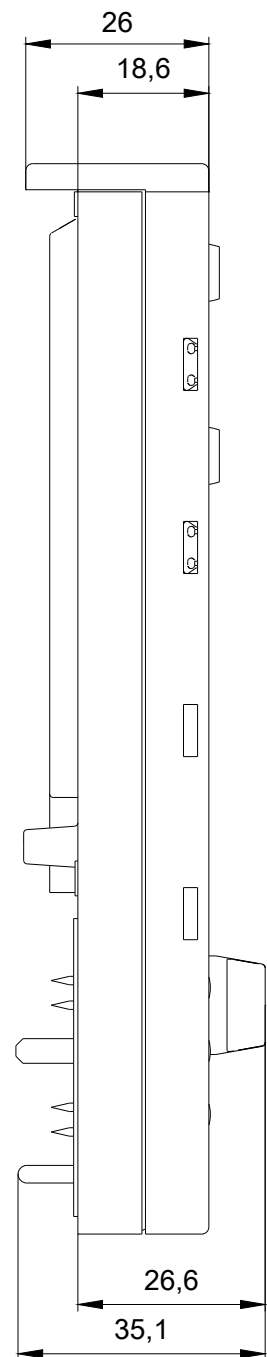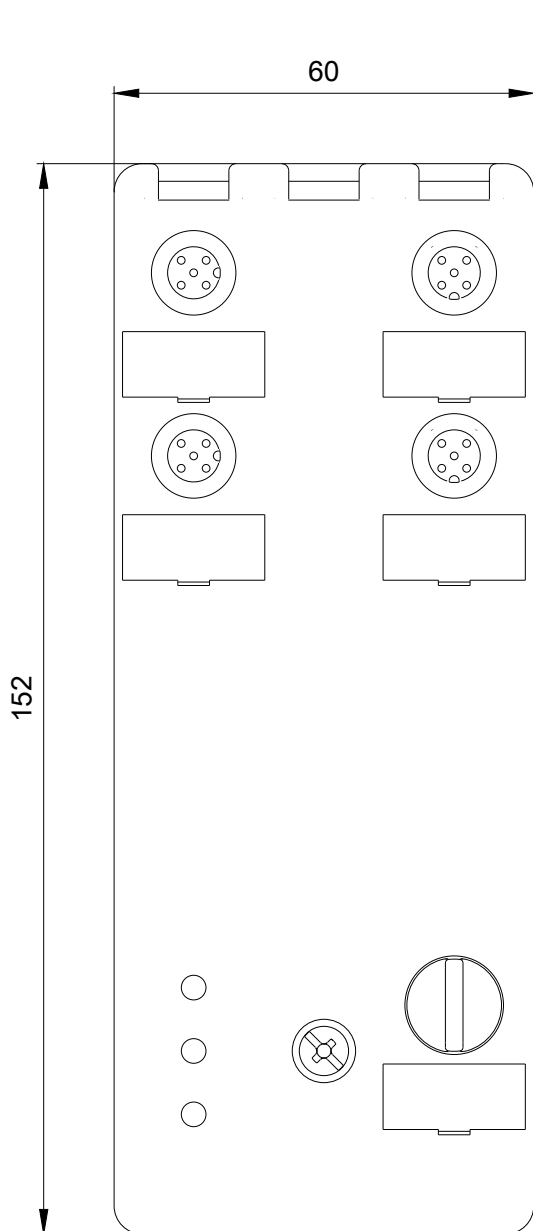

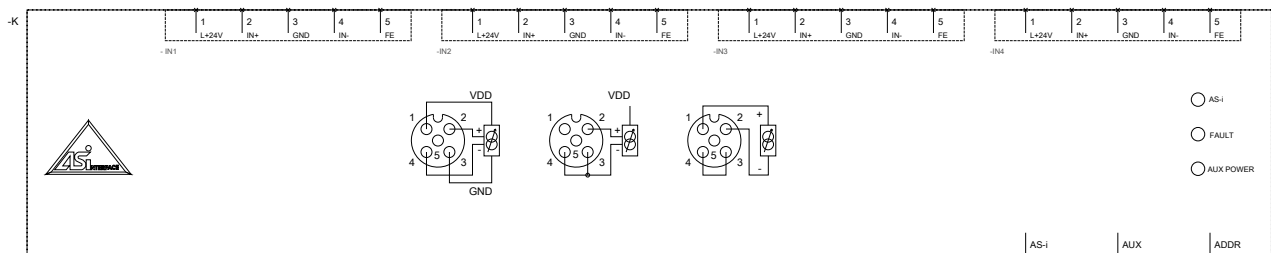

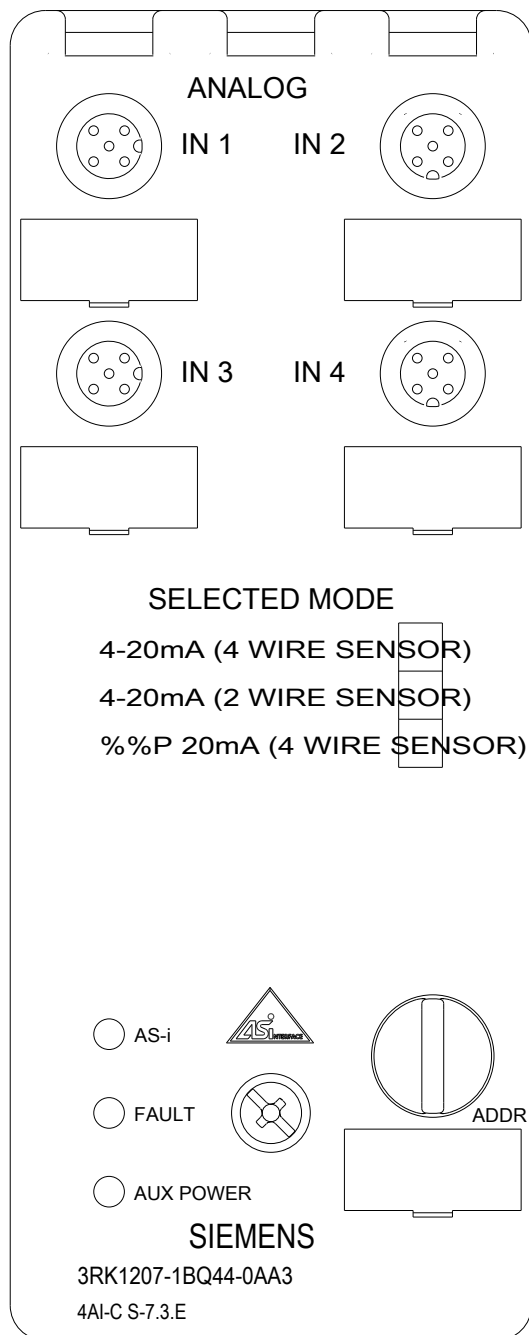

last modified:

04/09/2020