


Terminal block Device infeed

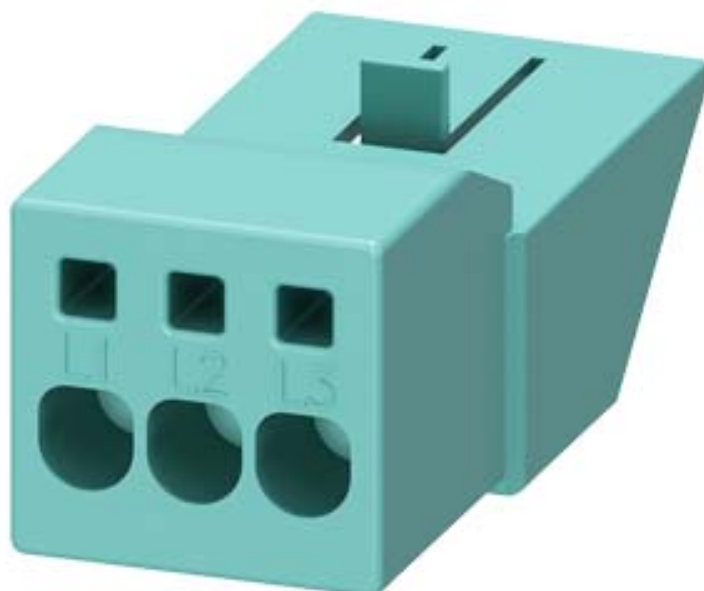

General technical data		
Product brand name		SIRIUS
Product designation		Terminal block
Design of the product		for power outlet
Size of the circuit-breaker		S00, S0
Protection class IP on the front		IP20
Insulation voltage with degree of pollution 3 at AC rated value	V	500
Ambient temperature		
• during storage	°C	-50 ... +80
• during operation	°C	-20 ... +60
Ampacity maximum	A	32
Installation/ mounting/ dimensions		
Width	mm	26
Height	mm	25
Depth	mm	60
Connections/ Terminals		
Type of electrical connection for main current circuit		spring-loaded terminals

Type of connectable conductor cross-sections	
• for main contacts — solid — stranded — finely stranded — with core end processing • at AWG conductors for main contacts	1x (1 ... 10 mm ²) 1x (1 ... 10 mm ²) 1x (1 ... 6 mm ²) 1x (18 ... 8)

Certificates/ approvals

Certificate of suitability	CE / UL / CSA / CCC
-----------------------------------	---------------------

General Product Approval	Declaration of Conformity	Test Certificates
---------------------------------	----------------------------------	--------------------------



CSA



UL



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

Shipping Approval	other
--------------------------	--------------



ABS

[Confirmation](#)



VDE

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2917-5FA00>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2917-5FA00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RV2917-5FA00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RV2917-5FA00&lang=en

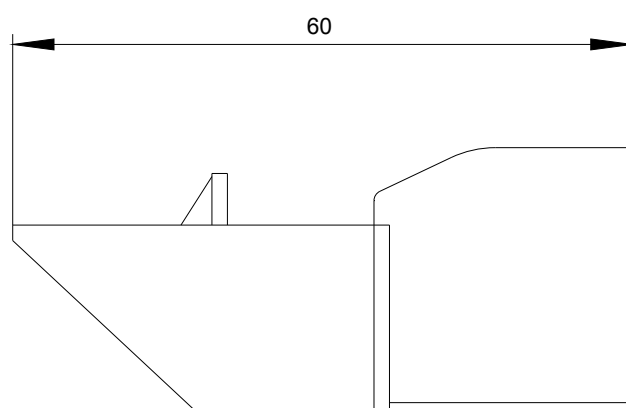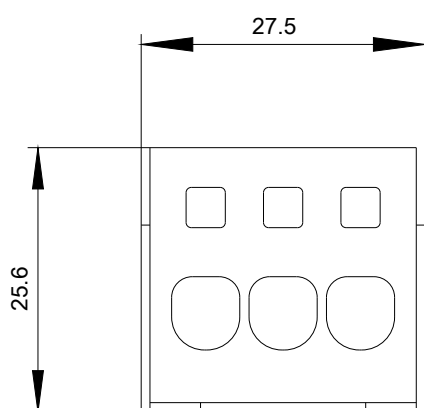

last modified:

04/04/2020