

SETRON, Fuse switch disconnecter 3NP1, 3-pole, NH000, 160 A, for assembly and installation on Mounting plate, box terminal, Cover level 45 mm



Model	
Product brand name	SETRON
Product designation	3NP1 fuse switch disconnecter
Design of the product	cover level 45 mm
Design of the safety monitoring	Without
Design of the operating mechanism	Cover handle
Design of the load switch / Strip form	No
Type of the driving mechanism / motor drive	No
General technical data	
Number of poles	3
Type of device	For assembly and installation on mounting plate
Size of disconnecting link	000
Size of fuse link	NH000
Operating current / at 35 °C / rated value	160 A
Let-through current / with closed switch / maximum permissible	15 kA
cut-off value I ² t _{max} / 500 V	223 000 A ² ·s
Power factor	
• at AC-22 B	0.65

• at AC-23 B	0.45
• with capacitive load	-0.25
circuit-breaker / Design	3NP11
Mechanical service life (switching cycles) / typical	2 000
Fuse system	LV HRC fuse
Degree of pollution	3

Voltage

Insulation voltage	
• rated value	690 V
• with degree of pollution 3 / at AC / rated value	690 V
• with degree of pollution 2 / at AC / rated value	1 000 V
Power factor / at AC-21 B	0.95
Surge voltage resistance / rated value	8 kV
Operating current / at AC / rated value	160 A
Operating voltage	
• at AC / rated value / maximum	690 V
• at DC / rated value	440 V
• at DC / rated value / maximum	440 V

Protection class

Protection class IP	
• with closed switch / with cover or cable lug cover	IP40
• with closed switch / without cover or cable lug cover	IP30
• on the front	IP40
• open	IP20

Dissipation

Power loss [W]	
• with conventional rated thermal current / without fuse / per pole	5 W
• with conventional rated thermal current / without fuse / per device	15 W
• for rated value of the current / at AC / in hot operating state / per pole	14 W
• of the fuse / per fuse / maximum	9 W

Current

Operating current	
• at AC-23 B / at 690 V / rated value	25 A
• at AC-23 B / at 500 V / rated value	40 A
• at AC-23 B / at 400 V / rated value	160 A
• at AC-23 B / at 240 V / rated value	160 A

• at AC-22 B / at 690 V / rated value	50 A
• at AC-22 B / at 500 V / rated value	125 A
• at AC-22 B / at 400 V / rated value	160 A
• at AC-22 B / at 240 V / rated value	160 A
• at AC-21 B / at 690 V / rated value	160 A
• at AC-21 B / at 500 V / rated value	160 A
• at AC-21 B / at 400 V / rated value	160 A
• at AC-21 B / at 240 V / rated value	160 A
• at DC-23 B / at 440 V / rated value	25 A
• at DC-23 B / at 240 V / rated value	80 A
• at DC-23 B / at 120 V / rated value	80 A
• at DC-22 B / at 440 V / rated value	50 A
• at DC-22 B / at 240 V / rated value	100 A
• at DC-22 B / at 120 V / rated value	100 A
• at DC-21 B / at 440 V / rated value	100 A
• at DC-21 B / at 240 V / rated value	160 A
• at DC-21 B / at 120 V / rated value	160 A
Continuous current	
• rated value	100 A
• at 40 °C / rated value	150 A
• at 45 °C / rated value	140 A
• at 50 °C / rated value	130 A
• at 55 °C / rated value	120 A
Let-through current / with high-speed activation / maximum permissible	10 kA
Let-through current / I _c / maximum permissible	
• 400 V	15 000 A
• 500V	15 000 A
cut-off value I ² t _{max.} / 400 V	166 000 A ² ·s
Main circuit	
Operating current	
• rated value	100 A
• with capacitive load / at 400 V / rated value	72 A
• with capacitive load / at 500 V / rated value	55 A
Auxiliary circuit	
Number of CO contacts / for auxiliary contacts	0
Number of NC contacts / for auxiliary contacts	0
Number of NO contacts / for auxiliary contacts	0
Suitability	
Suitability for use	
• Main switch	No

• switch disconnecter	Yes
• EMERGENCY OFF switch	No
• safety switch	Yes
• maintenance/repair switch	Yes

Product details

Product feature / interlock	Yes
• Product component / Trip indicator	No
• Product function / Phase failure monitoring	No
• Product component / undervoltage release	No
• Product component / undervoltage release with leading contact	No
Product feature / sealable	Yes
Product extension / Auxiliary switch	Yes
Product extension / optional	
• locking capability	Yes
• motor drive	No
• Phase failure monitoring	Yes
• fuse monitoring	Yes
• Voltage trigger	No
• Overvoltage protection monitoring	Yes

Product function

Product function	
• fuse monitoring	No
• Overvoltage protection monitoring	No

Short circuit

Conditional short-circuit current (I _q)	
• rated value	80 kA
• at AC / at 240 V / with high-speed activation / rated value	80 kA
• at AC / at 500 V / with high-speed activation / rated value	80 kA
• at AC / at 690 V / with high-speed activation / rated value	50 kA
• with closed switch / at AC / at 240 V / rated value	120 kA
• with closed switch / at AC / at 500 V / rated value	120 kA
• with closed switch / at AC / at 690 V / rated value	100 kA

Connections

Arrangement of electrical connectors / for main current circuit	other
Connectable conductor cross-section / for main contacts	
• single or multi-stranded / minimum	1.5 mm ²
• single or multi-stranded / maximum	50 mm ²
• finely stranded / with core end processing / minimum	1.5 mm ²
• finely stranded / with core end processing / maximum	35 mm ²
• stranded / minimum	1.5 mm ²
• stranded / maximum	50 mm ²
Tightening torque / with screw-type terminals	
• minimum	3.5 N·m
• maximum	4 N·m
Type of connectable conductor cross-sections / of the laminated conductors / maximum	8 x 8 mm
Type of connection	Box terminal
Type of electrical connection / for main current circuit	box terminal

Mechanical Design

Height	141.7 mm
Width	88.8 mm
Depth	74.1 mm
Mounting type	mounting plate
Mounting type	
• floor mounting	Yes
• front mounting	No
• front mounting with 4-hole attachment	No
• front mounting with central attachment	No
• rail mounting	No
Mounting position	horizontal/vertical
Net weight	0.47 kg

Environmental conditions

Ambient temperature / during operation	
• minimum	-25 °C
• maximum	55 °C
Ambient temperature / during storage	
• minimum	-50 °C
• maximum	80 °C

Certificates

Reference code	
• acc. to DIN EN 61346-2	Q

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



CCC



UR



VDE

[Miscellaneous](#)



EG-Konf.

[Type Test Certificates/Test Report](#)

Test Certificates	Shipping Approval
-------------------	-------------------

[Special Test Certificate](#)



LRS

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NP1123-1CA20>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NP1123-1CA20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)





http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NP1123-1CA20


CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

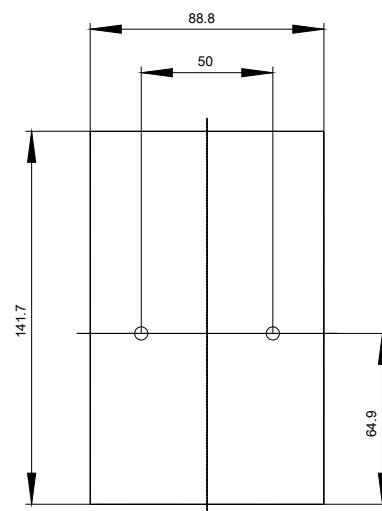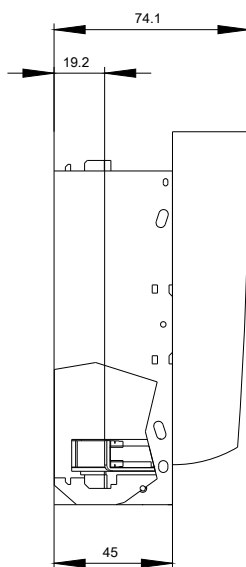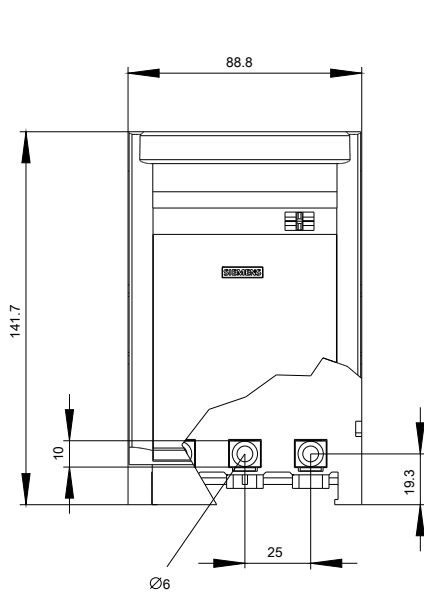

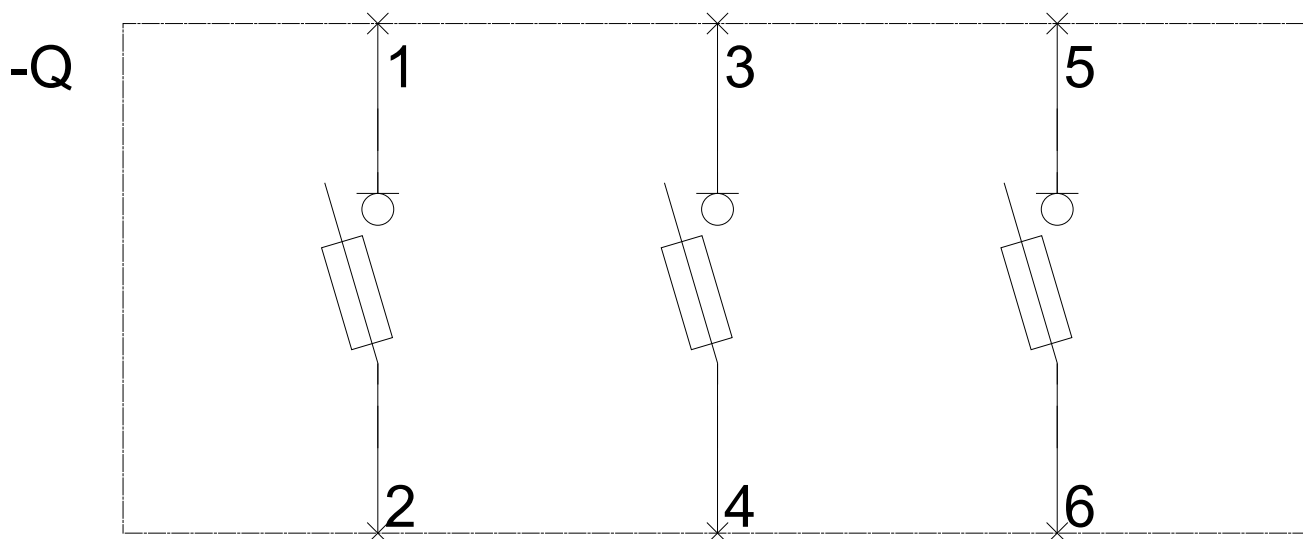

-CB

