

LV HRC fuse element, NH2, In: 315 A, gG, Un AC: 690 V, Un DC: 440 V, Front indicator, live grip lugs



| Model                                        |                                 |
|----------------------------------------------|---------------------------------|
| Product brand name                           | SETRON                          |
| Product designation                          | LV HRC fuse link                |
| Design of the product                        | With blade contacts             |
| Design of an identification indicator        | Front indicators                |
| Design of the switching contact              | Non-corroding, silver-plated    |
| Design of the fuse link                      | LV HRC fuse link                |
| General technical data                       |                                 |
| Size of fuse system / acc. to DIN EN 60269-1 | NH2                             |
| Operating class of the fuse link             | gG                              |
| circuit-breaker / Design                     | 3NA3                            |
| Type of voltage                              | AC/DC                           |
| Operating current / at AC / rated value      | 315 A                           |
| Supply voltage                               |                                 |
| • at AC / rated value                        | 690 V                           |
| • at DC                                      | 440 V                           |
| Protection class                             |                                 |
| Protection class IP                          | IP20, with connected conductors |

## Switching capacity

### Switching capacity current

- |                                             |        |
|---------------------------------------------|--------|
| • at DC / acc. to IEC 60947-2 / rated value | 25 kA  |
| • acc. to IEC 60947-2 / rated value         | 120 kA |

## Dissipation

|                                                                                             |        |
|---------------------------------------------------------------------------------------------|--------|
| Power loss [W]                                                                              | 28.1 W |
| Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole | 28.1 W |

## Current

|                                                               |                     |
|---------------------------------------------------------------|---------------------|
| Tripping residual / rated value / derated current / at 40 Cel | 299.25 A            |
| Diken-export / Let-through energy                             | DE_3NA_2_690_gG_315 |

## Mechanical Design

|                    |                          |
|--------------------|--------------------------|
| Width              |                          |
| • of the enclosure | 57.8 mm                  |
| Mounting position  | Any, preferably vertical |
| Net weight         | 657 g                    |

## Environmental conditions

|                                      |                                     |
|--------------------------------------|-------------------------------------|
| Ambient temperature                  |                                     |
| • minimum                            | -5 °C                               |
| • maximum                            | 40 °C                               |
| Ambient temperature / during storage | Air humidity 90% at 20 °C           |
| Environmental category               | -20 to +50 at 95% relative humidity |

## Certificates

|                          |   |
|--------------------------|---|
| Reference code           |   |
| • acc. to DIN EN 61346-2 | F |
| • acc. to DIN EN 81346-2 | F |

| General Product Approval                                                          |                                                                                   | Declaration of Conformity                                                         | Test Certificates                                  |                                          |                               |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------|------------------------------------------|-------------------------------|
|  |  |  | <a href="#">Type Test Certificates/Test Report</a> | <a href="#">Special Test Certificate</a> | <a href="#">Miscellaneous</a> |
| CCC                                                                               | VDE                                                                               | EG-Konf.                                                                          |                                                    |                                          |                               |

| Shipping Approval                                                                 | other                                       |                               |  |  |  |
|-----------------------------------------------------------------------------------|---------------------------------------------|-------------------------------|--|--|--|
|  | <a href="#">Environmental Conformations</a> | <a href="#">Miscellaneous</a> |  |  |  |
| GL                                                                                |                                             |                               |  |  |  |

#### Further information

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3252-6>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA3252-6>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3NA3252-6](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3252-6)

##### CAX-Online-Generator

<http://www.siemens.com/cax>


##### Tender specifications

<http://www.siemens.com/specifications>

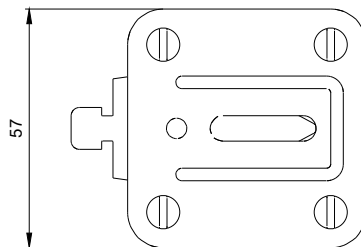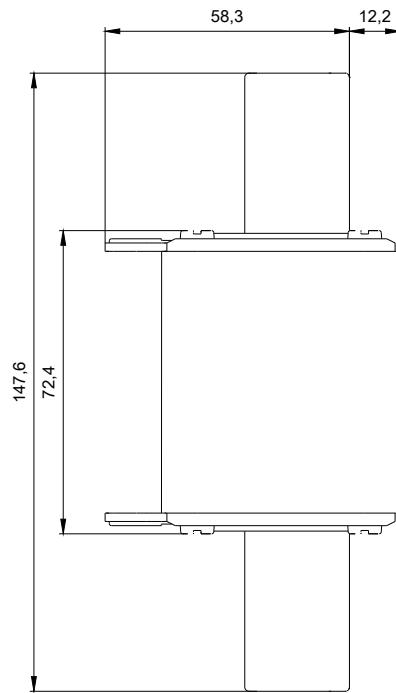

1

-F1



2