

### MLFB-Ordering data

6SL3525-0PE24-0AA1



Figure similar

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications																														
<b>Input</b> <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Line voltage</td><td>380 ... 500 V <math>\pm 10</math> %</td></tr> <tr> <td>Line frequency</td><td>47 ... 63 Hz</td></tr> <tr> <td>Rated current</td><td>9.50 A</td></tr> </table>	Number of phases	3 AC	Line voltage	380 ... 500 V $\pm 10$ %	Line frequency	47 ... 63 Hz	Rated current	9.50 A	<table> <tr> <td>Power factor <math>\lambda</math></td><td>0.95</td></tr> <tr> <td>Efficiency <math>\eta</math></td><td>0.97</td></tr> <tr> <td>Sound pressure level (1m)</td><td>74.5 dB</td></tr> <tr> <td>Power loss</td><td>0.14 kW</td></tr> </table>	Power factor $\lambda$	0.95	Efficiency $\eta$	0.97	Sound pressure level (1m)	74.5 dB	Power loss	0.14 kW														
Number of phases	3 AC																														
Line voltage	380 ... 500 V $\pm 10$ %																														
Line frequency	47 ... 63 Hz																														
Rated current	9.50 A																														
Power factor $\lambda$	0.95																														
Efficiency $\eta$	0.97																														
Sound pressure level (1m)	74.5 dB																														
Power loss	0.14 kW																														
<b>Output</b> <table> <tr> <td>Number of phases</td><td>3 AC</td></tr> <tr> <td>Rated voltage</td><td>400 V</td></tr> <tr> <td>Rated power</td><td>4.00 kW</td></tr> <tr> <td>Rated current (IN)</td><td>10.20 A</td></tr> <tr> <td>Max. output current</td><td>20.40 A</td></tr> <tr> <td>Pulse frequency</td><td>4 kHz</td></tr> <tr> <td>Output frequency for vector control</td><td>0 ... 200 Hz</td></tr> <tr> <td>Output frequency for V/f control</td><td>0 ... 650 Hz</td></tr> </table> <p>In firmware V4.7 and higher, due to legal requirements, the maximum output frequency is restricted to 550 Hz.</p>	Number of phases	3 AC	Rated voltage	400 V	Rated power	4.00 kW	Rated current (IN)	10.20 A	Max. output current	20.40 A	Pulse frequency	4 kHz	Output frequency for vector control	0 ... 200 Hz	Output frequency for V/f control	0 ... 650 Hz	<b>Ambient conditions</b> <table> <tr> <td>Cooling</td><td>demand-driven air cooling via integrated fan</td></tr> <tr> <td>Cooling air requirement</td><td>0.012 m<sup>3</sup>/s</td></tr> <tr> <td>Installation altitude</td><td>1000 m</td></tr> </table> <b>Ambient temperature</b> <table> <tr> <td>Operation</td><td>-10 ... 55 °C (14 ... 131 °F)</td></tr> <tr> <td>Transport</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> <tr> <td>Storage</td><td>-40 ... 70 °C (-40 ... 158 °F)</td></tr> </table> <b>Relative humidity</b> <table> <tr> <td>Max. operation</td><td>95 % at 40°C (104°F); RH, condensation not permitted</td></tr> </table>	Cooling	demand-driven air cooling via integrated fan	Cooling air requirement	0.012 m <sup>3</sup> /s	Installation altitude	1000 m	Operation	-10 ... 55 °C (14 ... 131 °F)	Transport	-40 ... 70 °C (-40 ... 158 °F)	Storage	-40 ... 70 °C (-40 ... 158 °F)	Max. operation	95 % at 40°C (104°F); RH, condensation not permitted
Number of phases	3 AC																														
Rated voltage	400 V																														
Rated power	4.00 kW																														
Rated current (IN)	10.20 A																														
Max. output current	20.40 A																														
Pulse frequency	4 kHz																														
Output frequency for vector control	0 ... 200 Hz																														
Output frequency for V/f control	0 ... 650 Hz																														
Cooling	demand-driven air cooling via integrated fan																														
Cooling air requirement	0.012 m <sup>3</sup> /s																														
Installation altitude	1000 m																														
Operation	-10 ... 55 °C (14 ... 131 °F)																														
Transport	-40 ... 70 °C (-40 ... 158 °F)																														
Storage	-40 ... 70 °C (-40 ... 158 °F)																														
Max. operation	95 % at 40°C (104°F); RH, condensation not permitted																														

### Overload capability

#### High Overload (HO)

Average max. rated output current during a cycle time of 300 s; 1.5 × rated output current (i.e. 150% overload) for 60 s with a cycle time of 300 s; 2 × rated output current (i.e. 200 % overload) for 3 s with a cycle time of 300 s

# SIEMENS

## Data sheet for SINAMICS G120D

MLFB-Ordering data 6SL3525-0PE24-0AA1




Figure similar

Mechanical data	Connections
-----------------	-------------

Degree of protection	IP65 / UL type 3
Size	FSC
Net weight	8.50 kg
Width	445.0 mm
Height	210.0 mm
Depth	220.0 mm

Converter losses to EN 50598-2*
---------------------------------

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-63.07 %

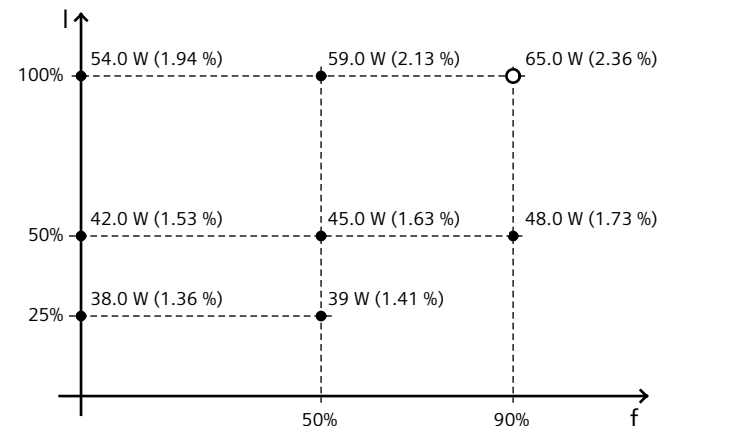

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

\*converted values

Line side	
Version	HAN Q4/2 (connector)
Conductor cross-section	2.50 ... 6.00 mm²
Motor end	
Version	HAN Q8 (socket)
Conductor cross-section	2.50 ... 4.00 mm²
PE connection	On housing with M5 screw
Conductor cross-section	10.00 ... 16.00 mm²
Max. motor cable length	

Shielded	15 m
Unshielded	30 m

Standards
-----------

Compliance with standards	UL 508C (UL list number E121068), CE, RCM
CE marking	Low-voltage directive 2006/95/EC