

Digital monitoring relay Current monitoring, 22.5 mm from 2-500 mA
 AC/DC Overshoot and undershoot 24 to 240 V AC/DC 50 to 60 Hz
 DC and AC ON delay and noise pulses delay 0.1 to 20 s Hysteresis
 0.1 to 250 mA 1 change-over contact with or without fault buffer
 spring-type connection system



Figure similar

Product brand name	SIRIUS
Product designation	Current monitoring relay with digital setting
Product type designation	3UG4

General technical data	
Product function	Current monitoring relay
Design of the display	LCD
Insulation voltage	
<ul style="list-style-type: none"> • for overvoltage category III according to IEC 60664 	
— with degree of pollution 3 rated value	690 V
Degree of pollution	3
Surge voltage resistance rated value	4 kV
maximum permissible voltage for safe isolation	
<ul style="list-style-type: none"> • between auxiliary and auxiliary circuit • between control and auxiliary circuit 	300 V 300 V
Protection class IP	IP20
Shock resistance	

• acc. to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
Vibration resistance	
• acc. to IEC 60068-2-6	1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
Mechanical service life (switching cycles)	
• typical	10 000 000
Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
Thermal current of the switching element with contacts maximum	5 A
Reference code acc. to DIN EN 81346-2	K
Relative repeat accuracy	1 %

Product Function

Product function	
• Overcurrent detection 1 phase	Yes
• Overcurrent detection 3 phase	No
• undercurrent detection 1 phase	Yes
• undercurrent detection 3 phases	No
• Overcurrent detection DC	Yes
• undercurrent detection DC	Yes
• Current window recognition DC	Yes
• Voltage window recognition 1 phase	No
• Voltage window recognition 3 phase	No
• Adjustable open/closed-circuit current principle	Yes
• External reset	Yes
• Auto-reset	Yes

Supply voltage

Type of voltage of the supply voltage	AC/DC
Supply voltage 1 at AC	
• at 50 Hz	20.4 ... 264 V
• at 60 Hz	20.4 ... 264 V
Supply voltage 1 at DC	20.4 ... 264 V

Measuring circuit

Type of current for monitoring	AC/DC
Measurable current	0.003 ... 0.6 A
Measurable line frequency	40 ... 500 Hz
Adjustable pick-up value current	
• 1	0.003 ... 0.5 A
• 2	0.003 ... 0.5 A
Adjustable response delay time	
• when starting	0.1 ... 20 s
• with lower or upper limit violation	0.1 ... 20 s

Adjustable switching hysteresis for measured current value	0.1 ... 250 mA
Buffering time in the event of power failure minimum	10 ms
Accuracy of digital display	+/-1 digit
Relative temperature-related measurement deviation	5 %
Internal resistance of the measuring circuit	500 mΩ

Precision

Relative metering precision	5 %
Temperature drift per °C	0.1 %/°C

Auxiliary circuit

Number of NC contacts	
• delayed switching	0
Number of NO contacts	
• delayed switching	0
Number of CO contacts	
• delayed switching	1
Operating frequency with 3RT2 contactor maximum	5 000 1/h

Main circuit

Number of poles for main current circuit	1
Operating voltage	
• rated value	24 ... 240 V

Outputs

Ampacity of the output relay at AC-15	
• at 250 V at 50/60 Hz	3 A
• at 400 V at 50/60 Hz	3 A
Ampacity of the output relay at DC-13	
• at 24 V	1 A
• at 125 V	0.2 A
• at 250 V	0.1 A
Operating current at 17 V minimum	0.005 A
Continuous current of the DIAZED fuse link of the output relay	4 A

Electromagnetic compatibility

Conducted interference	
• due to burst acc. to IEC 61000-4-4	2 kV
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV
• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	6 kV contact discharge / 8 kV air discharge

Galvanic isolation	
Design of the electrical isolation	Protective separation
Galvanic isolation	
<ul style="list-style-type: none"> • between entrance and outlet 	Yes
<ul style="list-style-type: none"> • between the outputs 	Yes
<ul style="list-style-type: none"> • between the voltage supply and other circuits 	Yes
Connections/ Terminals	
Product function	
<ul style="list-style-type: none"> • removable terminal for main circuit 	Yes
<ul style="list-style-type: none"> • removable terminal for auxiliary and control circuit 	Yes
Type of electrical connection	
<ul style="list-style-type: none"> • for main current circuit 	spring-loaded terminals
<ul style="list-style-type: none"> • for auxiliary and control current circuit 	spring-loaded terminals
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • solid 	2x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> • finely stranded with core end processing 	2 x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> • finely stranded without core end processing 	2x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> • at AWG conductors solid 	2x (24 ... 16)
<ul style="list-style-type: none"> • at AWG conductors stranded 	2x (24 ... 16)
Connectable conductor cross-section	
<ul style="list-style-type: none"> • solid 	0.25 ... 1.5 mm ²
<ul style="list-style-type: none"> • finely stranded with core end processing 	0.25 ... 1.5 mm ²
<ul style="list-style-type: none"> • finely stranded without core end processing 	0.25 ... 1.5 mm ²
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • solid 	24 ... 16
<ul style="list-style-type: none"> • stranded 	24 ... 16
Installation/ mounting/ dimensions	
Mounting position	any
Mounting type	snap-on mounting
Height	94 mm
Width	22.5 mm
Depth	91 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — Backwards — upwards — downwards — at the side 	0 mm
	0 mm
	0 mm
	0 mm
	0 mm






- for grounded parts
 - forwards 0 mm
 - Backwards 0 mm
 - upwards 0 mm
 - at the side 0 mm
 - downwards 0 mm
- for live parts
 - forwards 0 mm
 - Backwards 0 mm
 - upwards 0 mm
 - downwards 0 mm
 - at the side 0 mm

0 mm
0 mm
0 mm
0 mm
0 mm
0 mm
0 mm
0 mm
0 mm
0 mm
0 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C



Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
 CCC	 UL	 EAC
	 RCM	 EG-Konf.
		Miscellaneous

Test Certificates	Marine / Shipping	other	Railway
Special Test Certificate	Type Test Certificates/Test Report	Confirmation	Vibration and Shock
	 LRS	 DNV-GL DNVGL.COM/AF	

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<https://www.siemens.com/ic10>
- Industry Mall (Online ordering system)**
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3UG4621-2AW30>
- Cax online generator**
<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3UG4621-2AW30>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<https://support.industry.siemens.com/cs/ww/en/ps/3UG4621-2AW30>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**
http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3UG4621-2AW30&lang=en

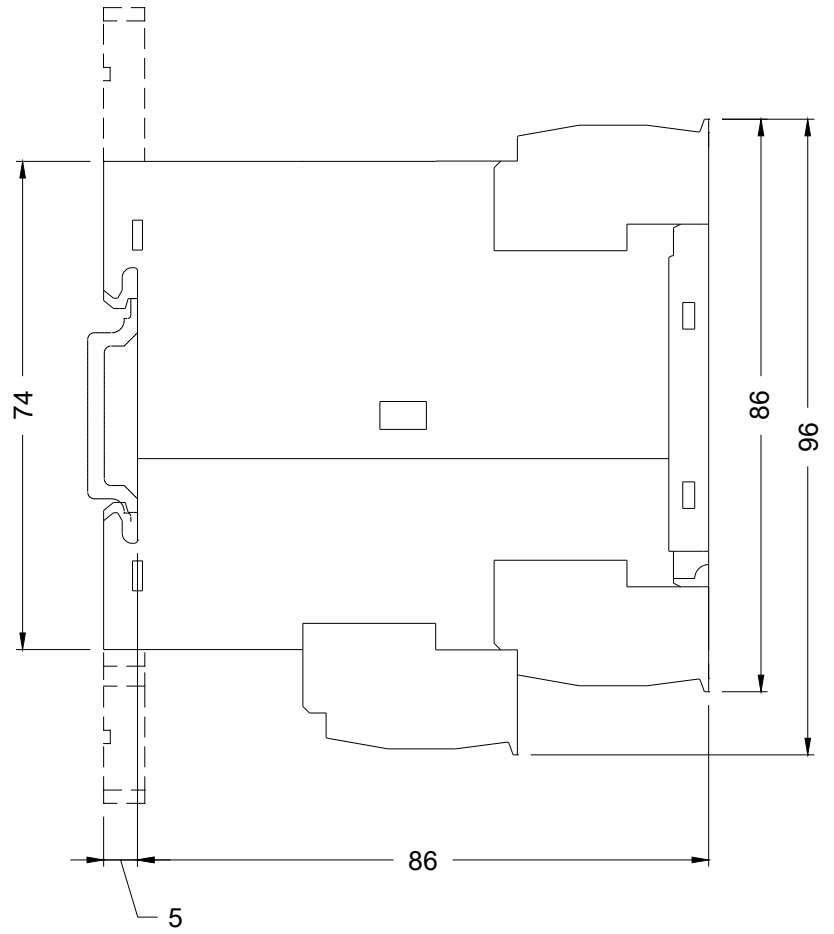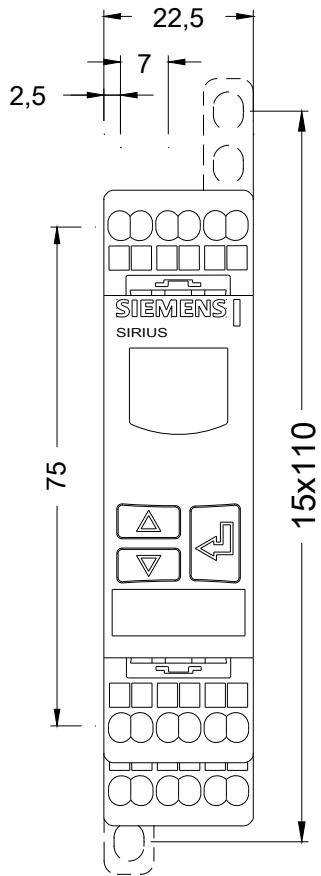

last modified:

04/09/2020