

LV HRC fuse element, NH1, In: 80 A, gG, Un AC: 690 V, Un DC: 440 V, Front indicator, live grip lugs



Model	
Product brand name	SETRON
Product designation	LV HRC fuse link
Design of the product	With blade contacts
Design of an identification indicator	Front indicators
Design of the switching contact	Non-corroding, silver-plated
Design of the fuse link	LV HRC fuse link
General technical data	
Size of fuse system / acc. to DIN EN 60269-1	NH1
Operating class of the fuse link	gG
circuit-breaker / Design	3NA3
Type of voltage	AC/DC
Operating current / at AC / rated value	80 A
Supply voltage	
• at AC / rated value	690 V
• at DC	440 V
Protection class	
Protection class IP	IP20, with connected conductors

Switching capacity

Switching capacity current

- | | |
|---|--------|
| • at DC / acc. to IEC 60947-2 / rated value | 25 kA |
| • acc. to IEC 60947-2 / rated value | 120 kA |

Dissipation

Power loss [W]	6.7 W
----------------	-------

Power loss [W] / for rated value of the current / at AC / in hot operating state / per pole	6.7 W
--	-------

Current

Tripping residual / rated value / derated current / at 40 Cel	76 A
--	------

Diken-export / Let-through energy	DE_3NA_1_690_gG_80
-----------------------------------	--------------------

Mechanical Design

Width	
• of the enclosure	30 mm

Mounting position	Any, preferably vertical
-------------------	--------------------------

Net weight	275 g
------------	-------

Environmental conditions

Ambient temperature	
• minimum	-5 °C
• maximum	40 °C

Ambient temperature / during storage	Air humidity 90% at 20 °C
--------------------------------------	---------------------------

Environmental category	-20 to +50 at 95% relative humidity
------------------------	-------------------------------------

Certificates

Reference code	
• acc. to DIN EN 61346-2	F
• acc. to DIN EN 81346-2	F

General Product Approval	Declaration of Conformity	Test Certificates		
 CCC	 VDE	 EG-Konf.	Type Test Certificates/Test Report	Special Test Certificate
				Miscellaneous

Shipping Approval	other			
 GL	Environmental Conformations	Miscellaneous		

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3NA3124-6>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3NA3124-6>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NA3124-6

CAX-Online-Generator

<http://www.siemens.com/cax>


Tender specifications

<http://www.siemens.com/specifications>

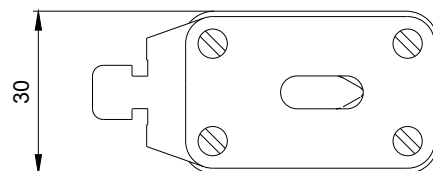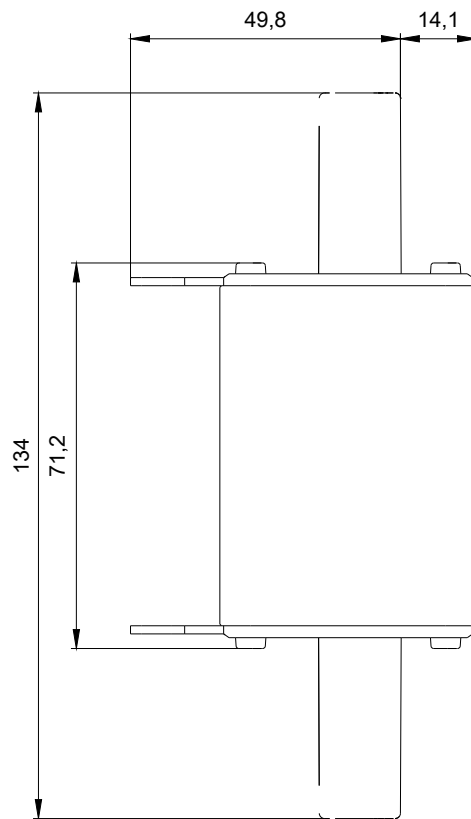

1

-F1



2