

Pin busbar, 16 mm<sup>2</sup> connection: 4x 3-phase according to UL 489, 480Y/277V for LS 5SJ4...-HG

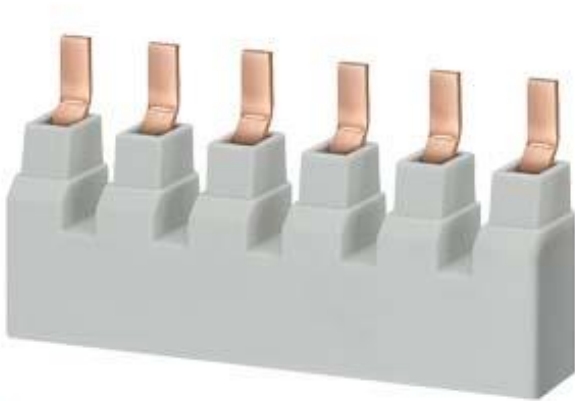


Figure similar

Model	
Product brand name	SETRON
Product designation	Pin busbar
Design of the product	16 mm <sup>2</sup> , 4x3PH, UL489
General technical data	
Phase number	3
Cross-section	16 mm <sup>2</sup>
Product details	
Product feature / insulated	Yes
Connections	
Type of electrical connection	Pin
Mechanical Design	
Width	15 mm
Length	205 mm
Net weight	154.2 g

## Certificates

General Product Approval

Declaration of Conformity



UR



EG-Konf.

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=5ST3665-1HG>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3665-1HG>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mfb=5ST3665-1HG](http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5ST3665-1HG)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

