

G fuse link DIN 41660 quick-response High breaking capacity Rated continuous current 1 A

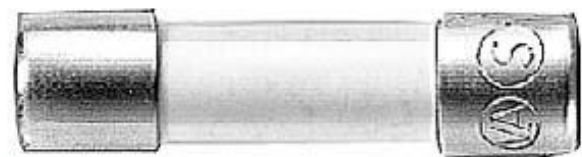


Figure similar

Model	
Product brand name	SETRON
Product designation	G fuse link
Design of the product	quick-response (F)
Type of miniature fuse	glass fuse
General technical data	
Size of the fuse link	5x25 mm
Melting characteristics	quick acting (F)
Type of voltage	AC
Operating voltage / rated value	250 V
Main circuit	
Operating current / rated value	1 A
Display and operation	
Product component / visual fault warning	No
Mechanical Design	
Net weight	1 g

Certificates

Reference code

- acc. to DIN EN 61346-2
- acc. to DIN EN 81346-2

F

FC

Declaration of Conformity

Test Certificates

other



EG-Konf.

[Miscellaneous](#)

[Environmental Confirmations](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8WA1822-7EF16>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8WA1822-7EF16>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WA1822-7EF16

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>