



Figure similar

MLFB-Ordering data 6SL3511-1PE21-5AM0

Client order no. :
Order no. :
Offer no. :
Remarks :

Item no. :
Consignment no. :
Project :

Rated data		General tech. specifications	
Input		Power factor λ	0.70 ... 0.85
Number of phases	3 AC	Efficiency η	0.95
Line voltage	380 ... 500 V ±10 %	Ambient conditions	
Line frequency	47 ... 63 Hz		
Rated current	3.80 A	Cooling	Convection
Output		Installation altitude	1000 m
Number of phases	3 AC	Ambient temperature	
Rated voltage	500 V	Operation	-10 ... 40 °C (14 ... 104 °F)
Rated power	1.50 kW	Transport	-40 ... 70 °C (-40 ... 158 °F)
Rated current (IN)	4.30 A	Storage	-40 ... 70 °C (-40 ... 158 °F)
Max. output current	8.60 A	Relative humidity	
Pulse frequency	4.000	Max. operation	95 % at 40°C (104°F); RH, condensation not permitted
Output frequency for V/f control	0 ... 650 Hz		
Due to legal restrictions a limitation to 550 Hz is under preparation			

Overload capability

High Overload (HO)

Average max. rated output current during a cycle time of 300 s; 1.5 × rated output current (i.e. 150% overload) for 60 s with a cycle time of 300 s; 2 × rated output current (i.e. 200 % overload) for 3 s with a cycle time of 300 s

MLFB-Ordering data

6SL3511-1PE21-5AM0



Figure similar

Mechanical data

Degree of protection	IP65 / UL type 3
Size	FSA
Net weight	7.00 kg
Width	445.0 mm
Height	210.0 mm
Depth	145.0 mm

Inputs / outputs

Standard digital inputs

Number	4
--------	---

Analog / digital inputs


Number	1
--------	---

PTC/ KTY interface

1 input, connectable sensors: PTC, KTY or Thermo-Click, connection via Power Modules

Converter losses to EN 50598-2*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-72.23 %

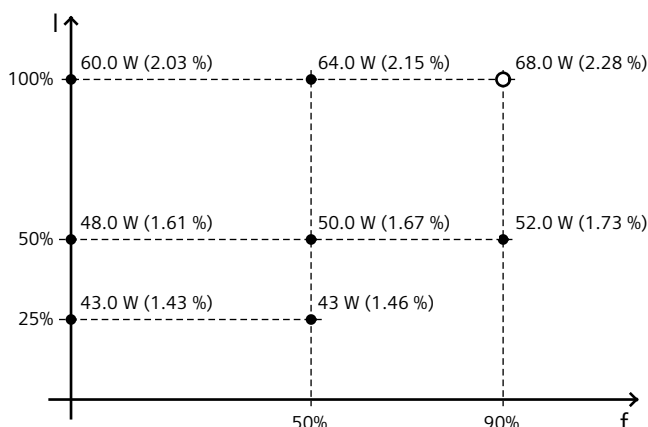

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

*converted values

Connections

Line side

Version	HAN Q4/2 (connector)
Conductor cross-section	1.50 ... 6.00 mm ²

Motor end

Version	HAN Q8 (socket)
Conductor cross-section	1.00 ... 4.00 mm ²

Max. motor cable length

Shielded	15 m
Unshielded	30 m

Communication

Communication	AS-Interface
---------------	--------------

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes

Standards

Compliance with standards	UL 508C (UL list number E121068), CE, RCM
---------------------------	---

CE marking

Low-voltage directive 2006/95/EC