



busbar adapter 60 mm SYS UL 508 Busbar system 60 mm Bar thickness: 5/10 mm/TT profile UL rating 100A/600V Can be used in spring circuits IEC rating 100 A/690 V for SIRIUS circuit breaker for SIRIUS Size S3 for cable outlet top Cable welded 150° 153mm Adapter length 200 mm Adapter width 72 mm

Model	
Product brand name	SETRON
Product designation	Device adapter
Design of the product	Accessories
Operating current / at AC / rated value	100 A
Operating voltage / at AC / rated value	690 V
Suitability for use	SIRIUS S3
Connections	
Type of connectable conductor cross-sections / for copper conductor / stranded	AWG 4
Mechanical Design	
Length	215 mm
Busbar center-to-center spacing	60 mm
Net weight	650 g
Certificates	

General Product Approval				Declaration of Conformity	Test Certificates
					Special Test Certificate
CSA	UR	UL		EG-Konf.	

Test Certificates	Shipping Approval				
Miscellaneous	Type Test Certificates/Test Report				
		ABS	LRS	PRS	RINA

Shipping Approval	other	
	Miscellaneous	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=8US1211-4TR00>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/8US1211-4TR00>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8US1211-4TR00

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

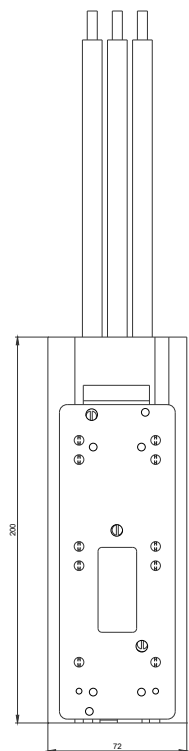

8US1211-4TR00

