

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



VARIOFACE module for the SIMATIC ET200SP HA with push-in connections and male D-SUB connector, for mounting on NS 35 rails, 37-pos.

Your advantages

- ✔ These VARIOFACE modules are used in combination with the relevant front adapters



Key Commercial Data

Packing unit	1
GTIN	
GTIN	4055626956541
Custom tariff number	85369010

Technical data

Note

Note	Standard or halogen-free cables
------	---------------------------------

Dimensions

Width	102.8 mm
Height	72.1 mm
Depth	46.6 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 70 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Nominal voltage U _N	25 V AC
	60 V DC
Max. perm. current (per branch)	2 A
Number of positions	37

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Technical data

General

Status display	No
Mounting position	any

Connection data

Connection name	Field level
Connection in acc. with standard	IEC / EN
Connection method	Push-in connection
Stripping length	8 mm
Number of positions	37
Conductor cross section solid	0.14 mm ² ... 4 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Connection data 2

Connection name	Controller level
Connection method	D-SUB pin strip
Number of connections	1
Number of positions	37

Supported controller

Controller	SIEMENS ET200SP HA
- suitable I/O card	6DL1131-6BH00-0PH1
	6DL1131-6TH00-0PH1
	6DL1131-6BL00-0PH1
	6DL1132-6BH00-0PH1
	6DL1132-6BL00-0PH1
	6DL1134-6TH00-0PH1
	6DL1134-6JH00-0PH1
	6DL1135-6TF00-0PH1

Standards and Regulations

Standards/regulations	DIN EN 50178
Flammability rating according to UL 94	V0


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Circuit diagram

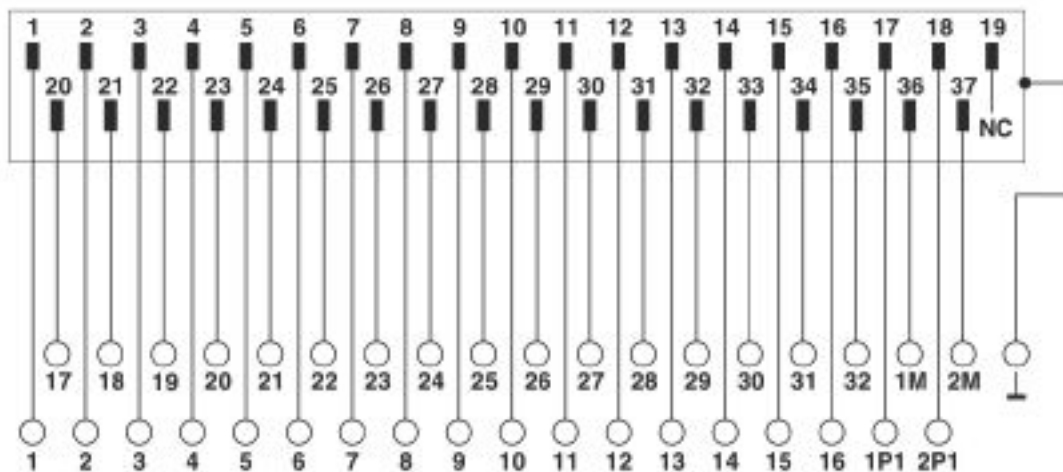

Classifications

eCl@ss

eCl@ss 8.0	27141152
eCl@ss 9.0	27141152

ETIM

ETIM 5.0	EC002780
ETIM 6.0	EC002780
ETIM 7.0	EC002780

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / CSAus / cULus Recognized / cCSAus

Ex Approvals

Approval details

CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN		105 V	
Nominal current IN		2 A	

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Approvals

mm ² /AWG/kcmil	26-14
----------------------------	-------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	2 A		
mm ² /AWG/kcmil	26-14		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN	125 V		
Nominal current IN	2 A		
mm ² /AWG/kcmil	26-14		

CSAus		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	105 V		
Nominal current IN	2 A		
mm ² /AWG/kcmil	28-14		

cULus Recognized	
------------------	--

cCSAus	
--------	--

Accessories

- Accessories
- System cable

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Accessories

Cable - CABLE-D37SUB/B/B/ 100/KONFEK/S - 2305509



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 1 m

Cable - CABLE-D37SUB/B/B/ 200/KONFEK/S - 2305512



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 2 m

Cable - CABLE-D37SUB/B/B/ 300/KONFEK/S - 2305525



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 3 m

Cable - CABLE-D37SUB/B/B/ 400/KONFEK/S - 2900759



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 4 m

Cable - CABLE-D37SUB/B/B/ 600/KONFEK/S - 2900760



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 6 m

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Accessories

Cable - CABLE-D37SUB/B/B/ 800/KONFEK/S - 2900761



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 8 m

Cable - CABLE-D37SUB/B/B/1000/KONFEK/S - 2900762



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 10 m

Cable - CABLE-D37SUB/B/B/1500/KONFEK/S - 2900763



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 15 m

Cable - CABLE-D37SUB/B/B/2000/KONFEK/S - 2900764



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 20 m

Cable - CABLE-D37SUB/B/B/HF/S/ 1,0M - 2908516



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 1 m

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Accessories

Cable - CABLE-D37SUB/B/B/HF/S/ 2,0M - 2908517



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 2 m

Cable - CABLE-D37SUB/B/B/HF/S/ 3,0M - 2908518



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 3 m

Cable - CABLE-D37SUB/B/B/HF/S/ 4,0M - 2908519



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 4 m

Cable - CABLE-D37SUB/B/B/HF/S/ 6,0M - 2908520



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 6 m

Cable - CABLE-D37SUB/B/B/HF/S/ 8,0M - 2908521



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 8 m

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Accessories

Cable - CABLE-D37SUB/B/B/HF/S/10,0M - 2908522



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 10 m

Cable - CABLE-D37SUB/B/B/HF/S/15,0M - 2908523



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 15 m

Cable - CABLE-D37SUB/B/B/HF/S/20,0M - 2908525



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 20 m

Cable - CABLE-D37SUB/B/B/HF/S/25,0M - 2908526



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 25 m

Cable - CABLE-D37SUB/B/B/HF/S/30,0M - 2908527



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 30 m

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Accessories

Cable - CABLE-D37SUB/B/B/HF/S/35,0M - 2908528



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 35 m

Cable - CABLE-D37SUB/B/B/HF/S/40,0M - 2908529



Assembled, shielded, halogen-free round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 40 m

Cable - CABLE-D37SUB/B/B/2500/KONFEK/S - 2902074



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 25 m

Cable - CABLE-D37SUB/B/B/3000/KONFEK/S - 2902075



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 30 m

Cable - CABLE-D37SUB/B/B/3500/KONFEK/S - 2902076



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 35 m

Interface module - VIP-2/PT/D37SUB/M/ET200SP-HA - 1100964

Accessories

Cable - CABLE-D37SUB/B/B/4000/KONFEK/S - 2902077



Assembled shielded round cable; connection 1: D-SUB socket strip (1x 37-position); connection 2: D-SUB socket strip (1x 37-position); cable length: 40 m

Necessary add-on products

Front adapters - FLKM-PA-D37/ETHA - 1076338



VARIOFACE front adapter for Siemens SIMATIC® ET 200SP HA, with a 37-pos. D-SUB male strip for digital 24 V DC and analog peripheral modules, max. 32 channels can be connected