

# Antenna - RAD-ISM-2459-ANT-FOOD-6-0-N - 2702898

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Omnidirectional antenna with protection against vandalism, 2.4 GHz/5 GHz, gain: 6 dBi/8 dBi, polarization: linear, opening angle: h 360°, degree of protection: IP68, resistant to cleaning agents, connection: N (female), for control cabinet mounting



## Your advantages

- Resistant to cleaning agents
- Impact-resistant housing
- For medium distances
- For freely mobile applications
- For multipoint or mesh connections

## Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 pc  |
| GTIN                                 | <br>4 055626 378992 |
| GTIN                                 | 4055626378992   |
| Weight per Piece (excluding packing) | 232.500 g   |
| Custom tariff number                 | 85177000  |
| Country of origin                    | Poland  |

## Technical data

### Dimensions

|          |       |
|----------|-------|
| Height   | 51 mm |
| Diameter | 92 mm |

### Ambient conditions

|   |                  |
|---|------------------|
| Degree of protection                    | IP68             |
| Ambient temperature (operation)         | -40 °C ... 80 °C |
| Ambient temperature (storage/transport) | -40 °C ... 80 °C |

### General

|                       |    |
|-----------------------|----|
| With connecting cable | No |
|-----------------------|----|

# Antenna - RAD-ISM-2459-ANT-FOOD-6-0-N - 2702898

## Technical data

### General

|                       |  |
|-----------------------|--|
| Frequency range       | 2.4 GHz  |
|                       | 5 GHz  |
|                       | 2.4 GHz  |
|                       | 5.15 GHz ... 5.83 GHz  |
| Horizontal beamwidth  | 360 °  |
| Polarization          | Linear vertical  |
| Impedance             | 50 Ω   |
| Gain                  | 6 dBi (2.4 GHz, when mounted on metal surface)               |
|                       | 8 dBi (5.6 GHz, when mounted on metal surface)               |
| Wind velocity         | 160 km/h (Has a force of 10 N)                               |
| Connection method     | N (female)   |
| Housing material      | Aluminum, HRA 150  |
| Mounting type         | Control cabinet  |
| Assembly instructions | Protection class: IP68, only when mounted on a level surface |
|                       | Accessories required   |


### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 25;   |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

# Antenna - RAD-ISM-2459-ANT-FOOD-6-0-N - 2702898

Schematic diagram

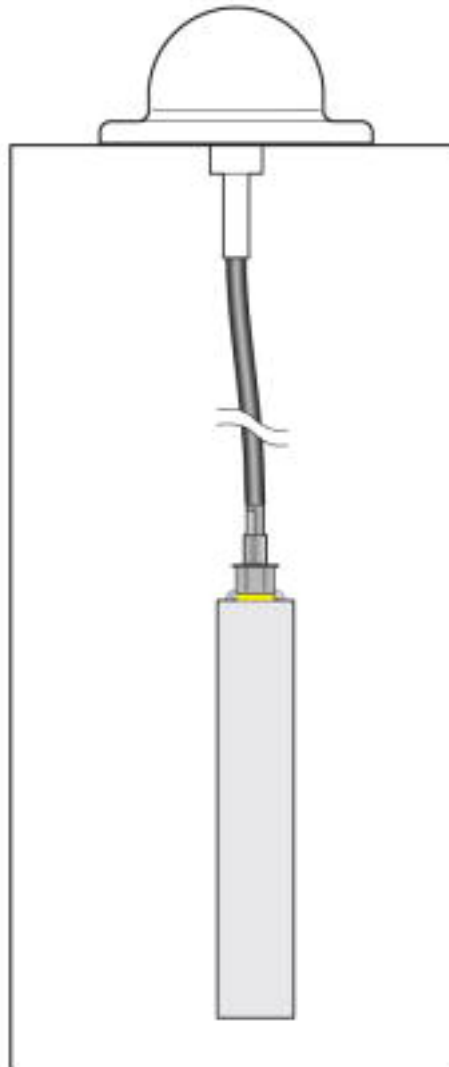

Installation example

## Classifications

eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27240409 |
| eCl@ss 4.1 | 27240409 |
| eCl@ss 5.0 | 27242215 |
| eCl@ss 5.1 | 19070102 |
| eCl@ss 6.0 | 27242208 |
| eCl@ss 7.0 | 19070105 |
| eCl@ss 8.0 | 19070105 |
| eCl@ss 9.0 | 19070105 |

# Antenna - RAD-ISM-2459-ANT-FOOD-6-0-N - 2702898

## Classifications

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC001423 |
| ETIM 3.0 | EC001423 |
| ETIM 4.0 | EC001423 |
| ETIM 5.0 | EC001698 |
| ETIM 6.0 | EC001698 |
| ETIM 7.0 | EC001698 |

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 20142601 |
| UNSPSC 7.0901 | 20142601 |
| UNSPSC 11     | 20142601 |
| UNSPSC 12.01  | 20142601 |
| UNSPSC 13.2   | 43221715 |
| UNSPSC 18.0   | 43221715 |
| UNSPSC 19.0   | 43221715 |
| UNSPSC 20.0   | 43221715 |
| UNSPSC 21.0   | 43221715 |

## Accessories

### Accessories

#### Coaxial cable

##### Antenna cable - RAD-PIG-RSMA/N-0.5 - 2903263



Antenna cable, outside diameter: 5 mm (0.2 in.), inner conductor: solid, attenuation: 0.4 / 0.5 / 0.6 dB at 0.9 / 2.4 / 5.8 GHz, connection: N (male) -> RSMA (male), cable length: 0.5 m (1.6 ft.)

##### Antenna cable - RAD-PIG-RSMA/N-1 - 2903264



Antenna cable, outside diameter: 5 mm (0.2 in.), inner conductor: solid, attenuation: 0.5 / 0.8 / 1.1 dB at 0.9 / 2.4 / 5.8 GHz, connection: N (male) -> RSMA (male), cable length: 1 m (3.3 ft.)

## Antenna - RAD-ISM-2459-ANT-FOOD-6-0-N - 2702898

### Accessories

#### Antenna cable - RAD-PIG-RSMA/N-2 - 2903265



Antenna cable, outside diameter: 5 mm (0.2 in.), inner conductor: solid, attenuation: 0.9 / 1.3 / 2.0 dB at 0.9 / 2.4 / 5.8 GHz, connection: N (male) -> RSMA (male), cable length: 2 m (6.5 ft.)

---

#### Antenna cable - RAD-PIG-RSMA/N-3 - 2903266



Antenna cable, outside diameter: 5 mm (0.2 in.), inner conductor: solid, attenuation: 1.2 / 2.0 / 3.0 dB at 0.9 / 2.4 / 5.8 GHz, connection: N (male) -> RSMA (male), cable length: 3 m (10 ft.)

---

#### Antenna cable - RAD-PIG-RSMA/N-5 - 2702140



Antenna cable, outside diameter: 5 mm (0.2 in.), inner conductor: solid, attenuation: 2.0 / 3.3 / 4.8 dB at 0.9 / 2.4 / 5.8 GHz, connection: N (male) -> RSMA (male), cable length: 5 m (16 ft.)

---

### Mounting material

#### Mounting material - RAD-ANT-VAN-MKT - 2885870



Mounting material for wall mounting of omnidirectional antenna with protection against vandals