


EPIC® H-B 32 AG

Housing design H-B for 2 inserts.

The connector housing consists of built-in housing, 2 double levers and a seal. It is suitable for use in control systems application.

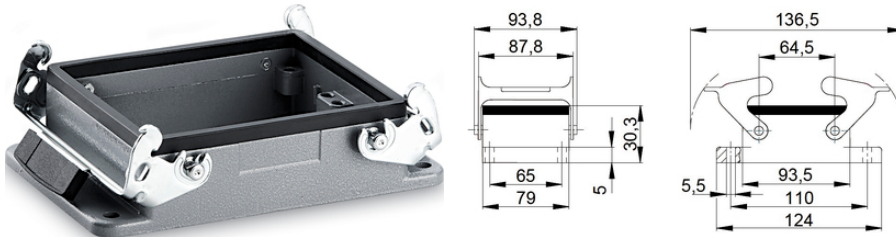

Benefits

Two inserts in one housing. With two levers for high safety

Application range

Plant engineering
Control engineering
Plastics industry

Product features

H-A case: Wall base
Dual levers
Included: flat gasket

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material:

Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating:

IP 65 (latched)

Temperature range:

-40°C to +100°C, short-term up to +125°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Last Update (10.02.2020)

©2020 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

EPIC® H-B 32 AG

Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-B 32 AG

Article number	Article description	M	Pieces / PU
H-B housing: panel-mount base (double lever)			
10132000	H-B 32 AG	AG	5

Last Update (10.02.2020)

©2020 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03.16