

SIRIUS safety relay Output expansion 3RO Power, with Relay enabling circuits 3 NO contacts plus Relay signaling circuit 1 NC contact $U_s = 115 \text{ V AC}$ screw terminal



General technical data

Product brand name	SIRIUS
Product category	Safety relays
Product designation	Output expansion
Design of the product	Relay enabling circuits
Protection class IP of the enclosure	IP20
Protection against electrical shock	finger-safe
Insulation voltage rated value	300 V
Ambient temperature	
• during storage	-40 ... +80 °C
• during operation	-25 ... +60 °C
Air pressure acc. to SN 31205	90 kPa ... 106 kPa
Relative humidity during operation	10 ... 95 %
Installation altitude at height above sea level maximum	2 000 m
Vibration resistance acc. to IEC 60068-2-6	5 ... 500 Hz: 0.75 mm
Shock resistance	5 g / 10 ms
Surge voltage resistance rated value	4 000 V
EMC emitted interference	IEC 60947-5-1, IEC 61000

Installation environment regarding EMC	This product is suitable for Class B environments and can also be used in domestic environments.
Overvoltage category	3
Degree of pollution	3
Reference code acc. to DIN EN 61346-2	F
Reference code acc. to DIN EN 81346-2	F
Power loss [W] maximum	4 W
Safety Integrity Level (SIL) acc. to IEC 61508	3
Performance level (PL) acc. to EN ISO 13849-1	e
Category acc. to EN ISO 13849-1	4
PFHD with high demand rate acc. to EN 62061	0.000000001 1/h
PFDavg with low demand rate acc. to IEC 61508	0.000001
T1 value for proof test interval or service life acc. to IEC 61508	20 y
Hardware fault tolerance acc. to IEC 61508	1
Safety device type acc. to IEC 61508-2	Type A
Number of outputs as contact-affected switching element	
• as NC contact	
— for signaling function delayed switching	0
— for feedback circuit instantaneous contact	1
— safety-related instantaneous contact	0
— safety-related delayed switching	0
• as NO contact	
— for signaling function instantaneous contact	0
— for signaling function delayed switching	0
— safety-related instantaneous contact	3
— safety-related delayed switching	0
Number of outputs as contact-less semiconductor switching element	
• for signaling function	
— delayed switching	0
Stop category acc. to DIN EN 60204-1	0

General technical data	
Type of electrical connection Plug-in socket	No
Operating frequency maximum	360 1/h
Switching capacity current of the NO contacts of the relay outputs	
• at DC-13	
— at 24 V	6 A
— at 115 V	1.1 A
— at 230 V	0.55 A

• at AC-15 — at 24 V — at 115 V — at 230 V	10 A 10 A 10 A
Thermal current of the switching element with contacts maximum	10 A
Operating current at 17 V minimum	5 mA
Mechanical service life (switching cycles) typical	10 000 000
maximum permissible voltage for safe isolation between electronic evaluation device and enabling circuit acc. to EN 60947-1	300 V
Design of the fuse link for short-circuit protection of the NO contacts of the relay outputs required	gL/gG: 16 A or MCB type A: 6 A or MCB type B: 4 A or MCB type C: 4 A
Make time with automatic start • typical • at AC maximum	10 ms 15 ms
Make time with automatic start after power failure • typical • maximum	10 ms 15 ms
Backslide delay time in the event of power failure • typical • maximum	15 ms 15 ms
Recovery time after power failure typical	0 s

Control circuit/ Control

Type of voltage of the control supply voltage	AC
Control supply voltage frequency • 1 rated value • 2 rated value	50 Hz 60 Hz
Control supply voltage • at AC — at 50 Hz — rated value — at 60 Hz — rated value	115 V 115 V
Operating range factor control supply voltage rated value of magnet coil • at AC — at 50 Hz — at 60 Hz	0.85 ... 1.1 0.85 ... 1.1

Installation/ mounting/ dimensions

Mounting position	on horizontal standard mounting rail
Required spacing for grounded parts at the side	5 mm

Required spacing with side-by-side mounting at the side	0 mm
Mounting type	screw and snap-on mounting
Width	90 mm
Height	100 mm
Depth	121.6 mm

Connections/ Terminals

Type of electrical connection	screw-type terminals
Type of connectable conductor cross-sections	
• solid	1x (0.5 ... 4.0 mm ²), 2x (0.5 ... 2.5 mm ²)
• finely stranded	
— with core end processing	1x (0.5 ... 2.5 mm ²), 2x (0.5 ... 1.5 mm ²)
Type of connectable conductor cross-sections at AWG conductors	
• solid	1x (20 ... 12), 2x (20 ... 14)

Product Function

Suitability for operation Device connector 3ZY12	No
Suitability for use	
• safety-related circuits	Yes

Certificates/ approvals

Certificate of suitability	
• TÜV (German technical inspectorate) certificate	Yes
• UL approval	Yes

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



[Type Examination Certificate](#)

Declaration of Conformity	Test Certificates	Shipping Approval
---------------------------	-------------------	-------------------



[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



other	Railway
Confirmation	Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1213-1AJ20>

Cax online generator



<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1213-1AJ20>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3SK1213-1AJ20>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SK1213-1AJ20&lang=en

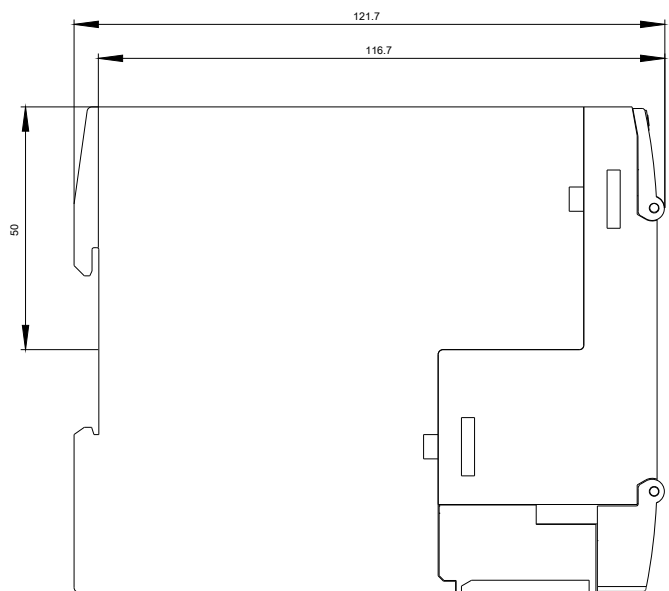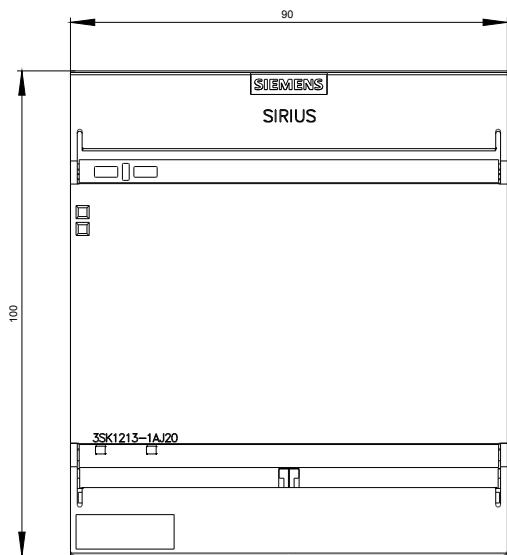

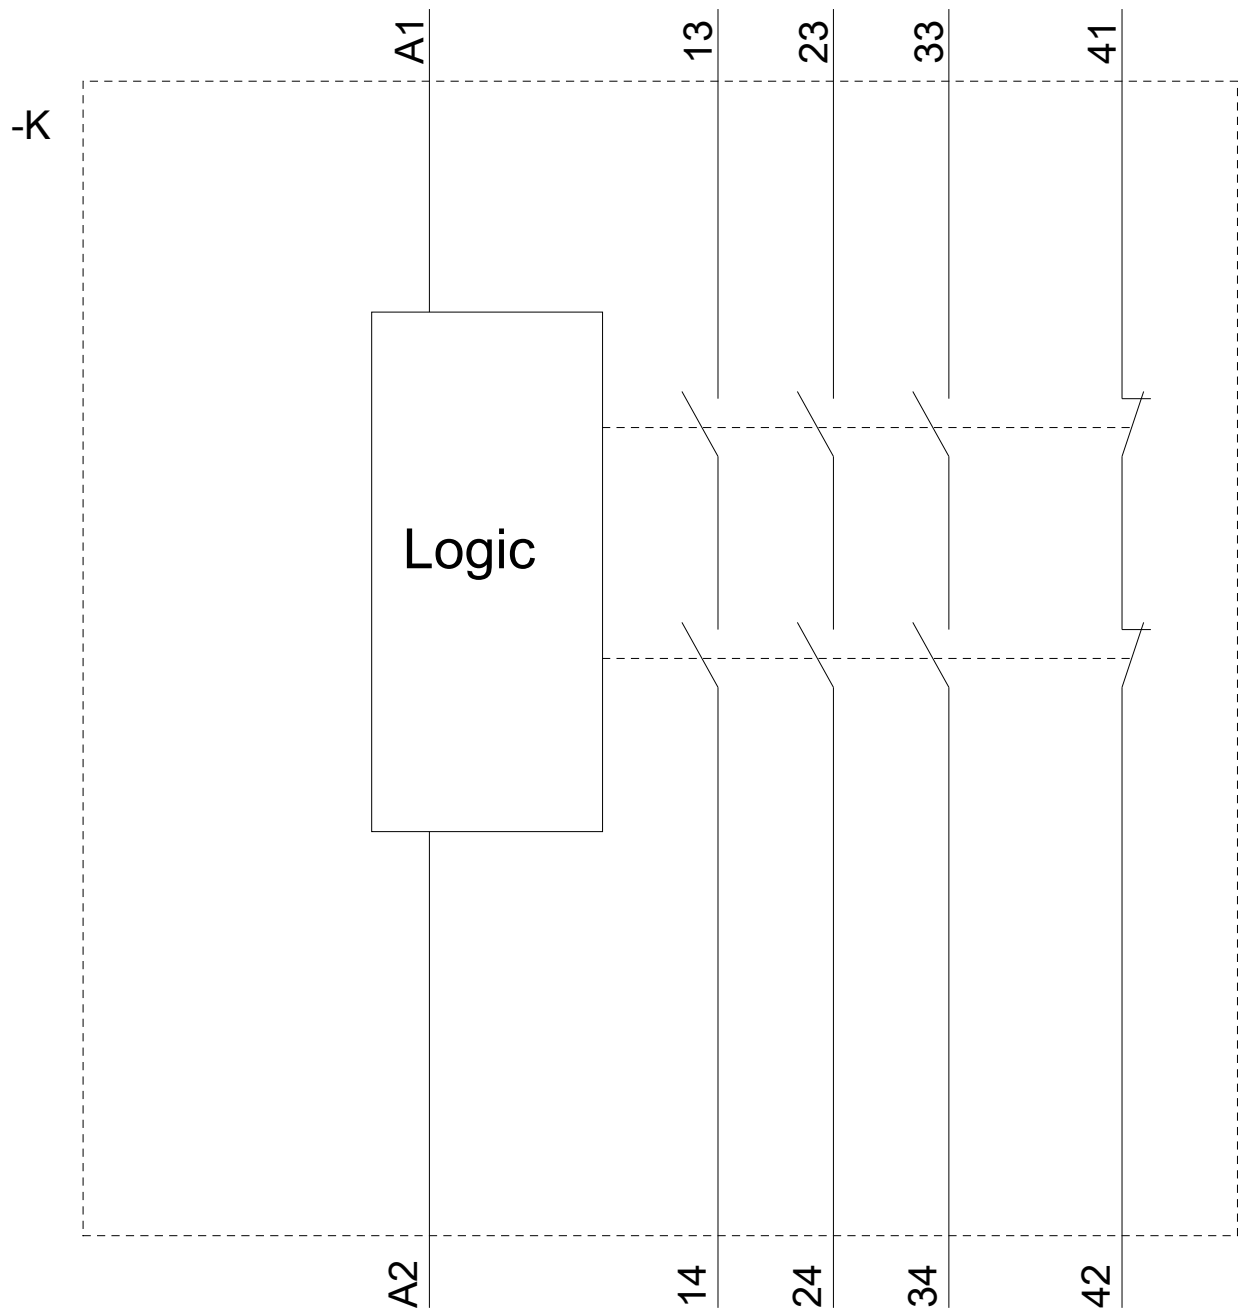

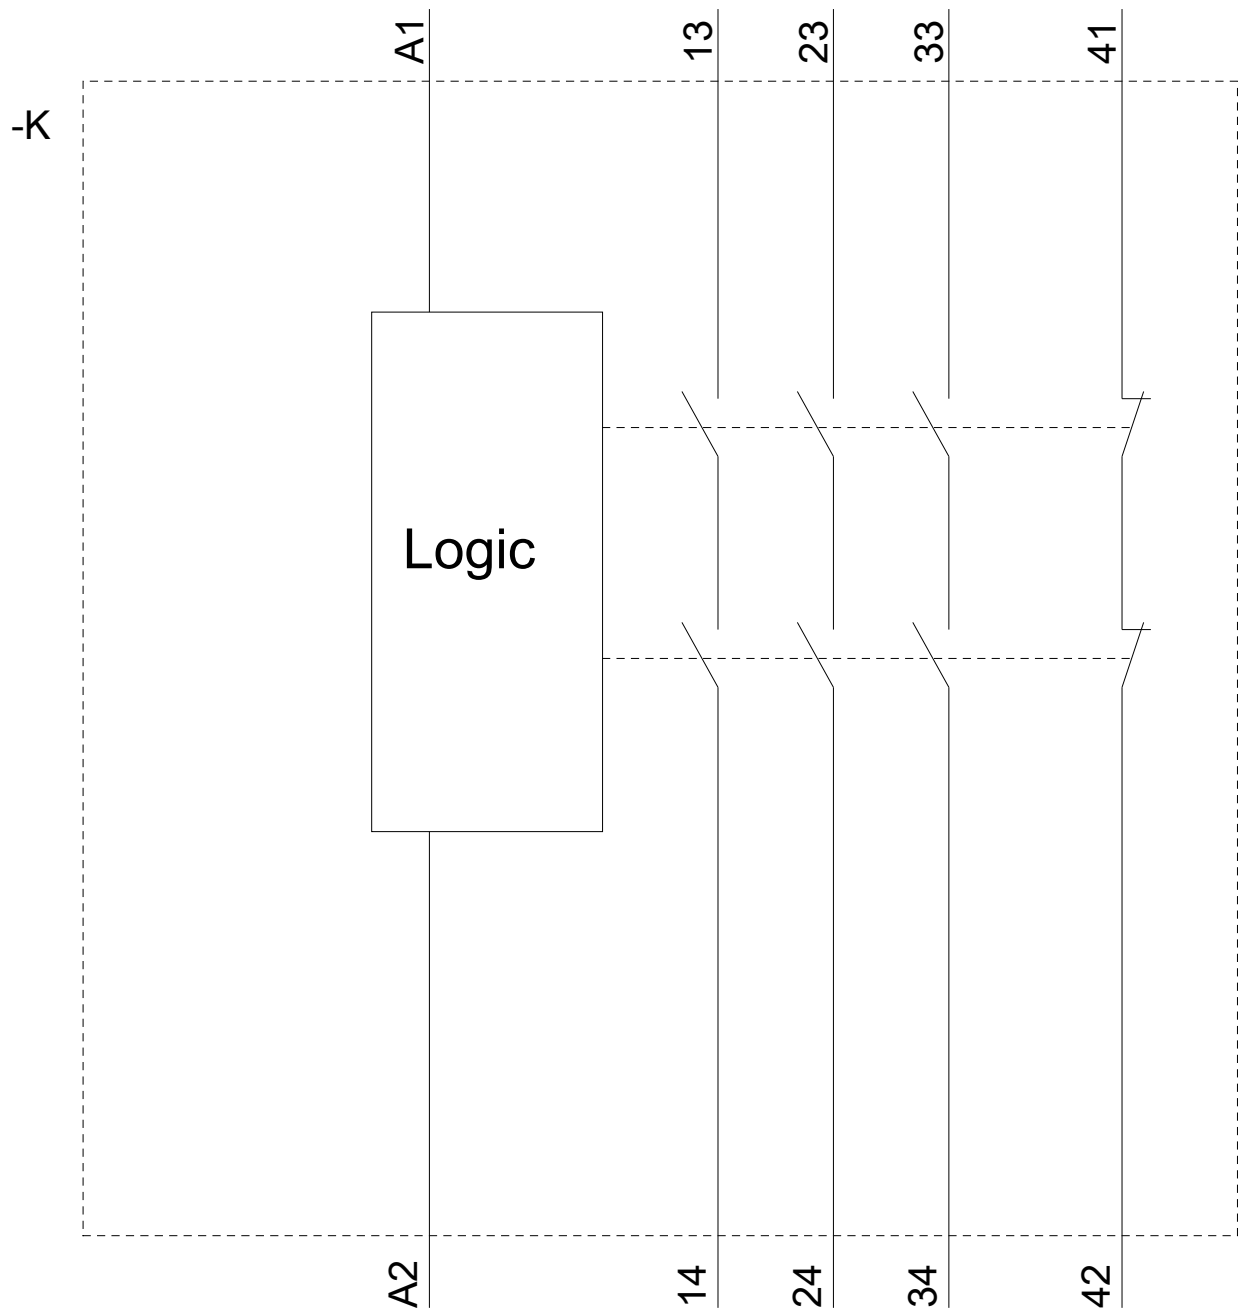

last modified:

03/10/2020