


EVF568



Wirable plug

SSTA040VASFKPG

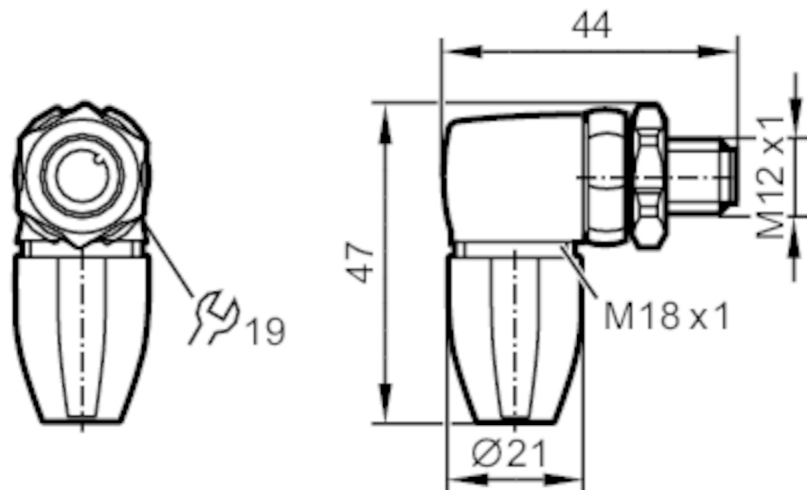

Application		
System		Free from silicone; gold-plated contacts
Application		sanitary and wet areas in the food industry
Free from silicone		yes
Electrical data		
Operating voltage	[M]	< 250 AC / < 300 DC
Protection class		II
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...100
Protection		IP 65; IP 67; IP 68; IP 69K
Mechanical data		
Weight	[g]	32.7
Material		PA 6.6 grey; sealing EPDM
Material nut		stainless steel
Remarks		
Pack quantity		1 pcs.
Electrical connection		
screw terminals: 0.25...1 mm ² ; Cable sheath: Ø 3.5...6 mm; AWG 23...17		
Electrical connection - plug		
Connector: 1 x M12, angled; Moulded body: PA 6.6, grey; Locking: stainless steel; sealing: EPDM; Contacts: gold-plated; Tightening torque: 0.6...1.2 Nm; Take into account the maximum value of the counterpart!		


EVF568

Wirable plug

SSTA040VASFKPG



Connection

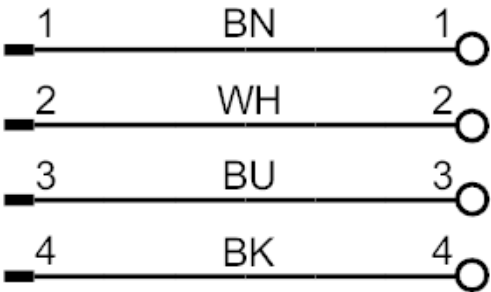

	Core colors
BK	black
BN	brown
BU	blue
WH	white
	Colours to DIN EN 60947-5-2