
Switching amplifier

N200/SA-2 110-240VAC






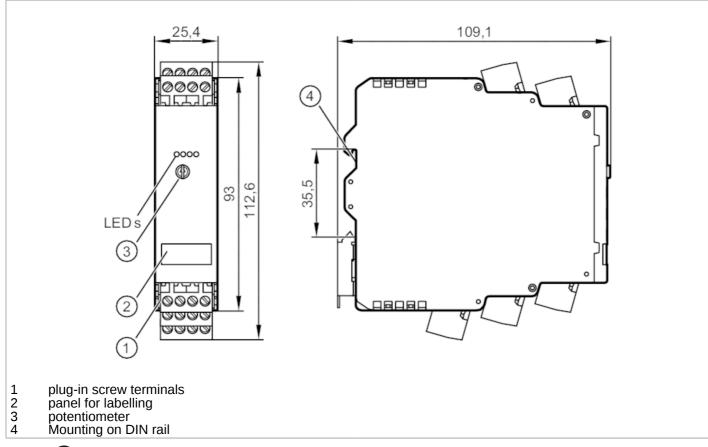

Product characteristics					
Housing		housing for DIN rail mounting			
Application					
Application		Power supply and signal evaluation			
Electrical data					
Nominal voltage AC	[V]	110240			
Nominal voltage tolerance	[%]	> 20			
Nominal voltage tolerance 2	[%]	2010			
Nominal frequency AC	[Hz]	5060			
Insulation rating	[V]	9			
Max. power consumption AC	[W]	11			
Auxiliary energy for sensors DC	[V]	24; (SELV, ± 10 %, 2 x ≤ 150 mA)			
Number of channels		2			
Inputs / outputs					
Number of inputs and outputs		Number of relay outputs: 2			
Outputs					
Number of relay outputs		2			
Contact rating		4 A (240 V AC, 24 V DC); (resistive load)			

Switching amplifier





Operating conditions				
Ambient temperature	[°C]	-2060		
Storage temperature	[°C]	-2570		
Max. relative air humidity	[%]	80; (40 °C: 50 % non condensing)		
Max. height above sea level	[m]	3000		
Protection		IP 20		
Protection rating terminals		IP 20		
Degree of soiling		2; (≤ 240 V AC)		
Tests / approvals				
MTTF	[years]	215		
Mechanical data				
Weight	[g]	241		
Housing		housing for DIN rail mounting		
Type of mounting		rail; (TH35 EN 60715)		
Material		plastics: PC-GF20		
Displays / operating elements				
		voltage supply	1 x LED, green	
Display		Output	2 x LED, yellow	
		errors	1 x LED, red	
Accessories				
Accessories (supplied)		connector: 5 x 4-wire, with screw connection, E40173		

Switching amplifier


N200/SA-2 110-240VAC



Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

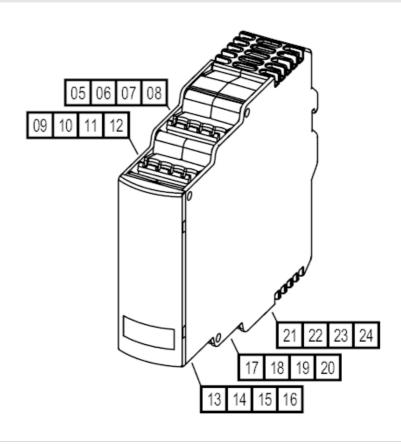

Switching amplifier

N200/SA-2 110-240VAC



05	Relay 1 normally open
06	Relay 1 common
07	Relay 1 common
08	Relay 1 normally closed
09	DC Sensor supply 1 (+)
10	sensor signal 1 pnp/npn
11	not used
12	DC Sensor supply 1 (-)
13	DC Sensor supply 2 (+)
14	sensor signal 2 pnp/npn
15	not used
16	DC Sensor supply 2 (-)
17	Relay 2 normally open
18	Relay 2 common
19	Relay 2 common
20	Relay 2 normally closed
21	AC Supply voltage (L)
22	AC Supply voltage (L)
23	AC Supply voltage (N)
24	AC Supply voltage (N)