
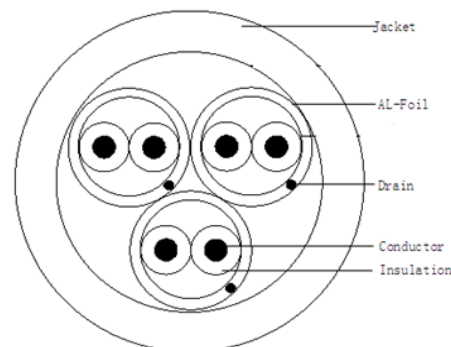


Product Datasheet

CABLE MPIS HF 3PR 100M

RS Article No: 812-4766

Cross Section:

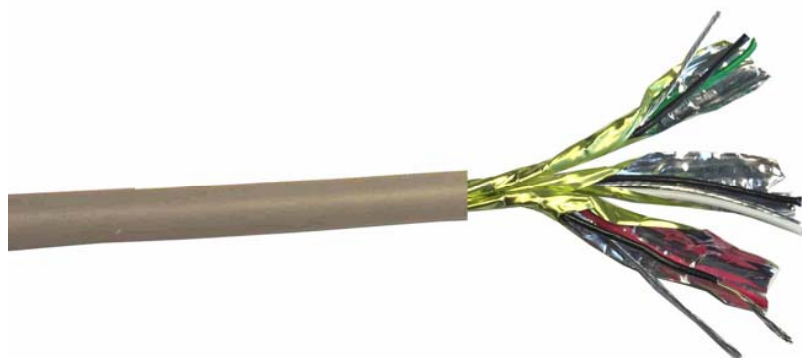

Cable Marking: 3PR 22 AWG LS0H 001M...100M

Construction:

Conductor: Tinned Copper

AWG: 22

Structure: 7/0.254

Conductor Dia. Nom. (mm): 0.76

Insulation: PE

Average Thickness(mm): 0.25

Insulation Dia. Nom. (± 0.20 mm): 1.25

Twisted: 2C

Drain: Tinned Copper

Structure: 7/0.25

AL-Mylar(Each Pair AL Facing in)

Assembly: 3P

Sheath: LSZH

Average Thickness(mm): 0.90

Min point Thickness(mm): 0.75

Outer Dia. Nom. (± 0.50 mm): 6.90

Colour:

Insulation colours : Black-Red Black-White Black-Green

Jacket color: Grey RAL7037

Electrical Characteristics:

Max. Conductor DC Resistance @20°C (ohms/km): 54.0