


## Incremental encoder with solid shaft and display

INCREMENTAL ENCODER PERFORMANCE LINE



- 1 M4 x 0.7 Depth 6 mm
- 2 M3 x 0.5 Depth 6 mm
- 3 Display

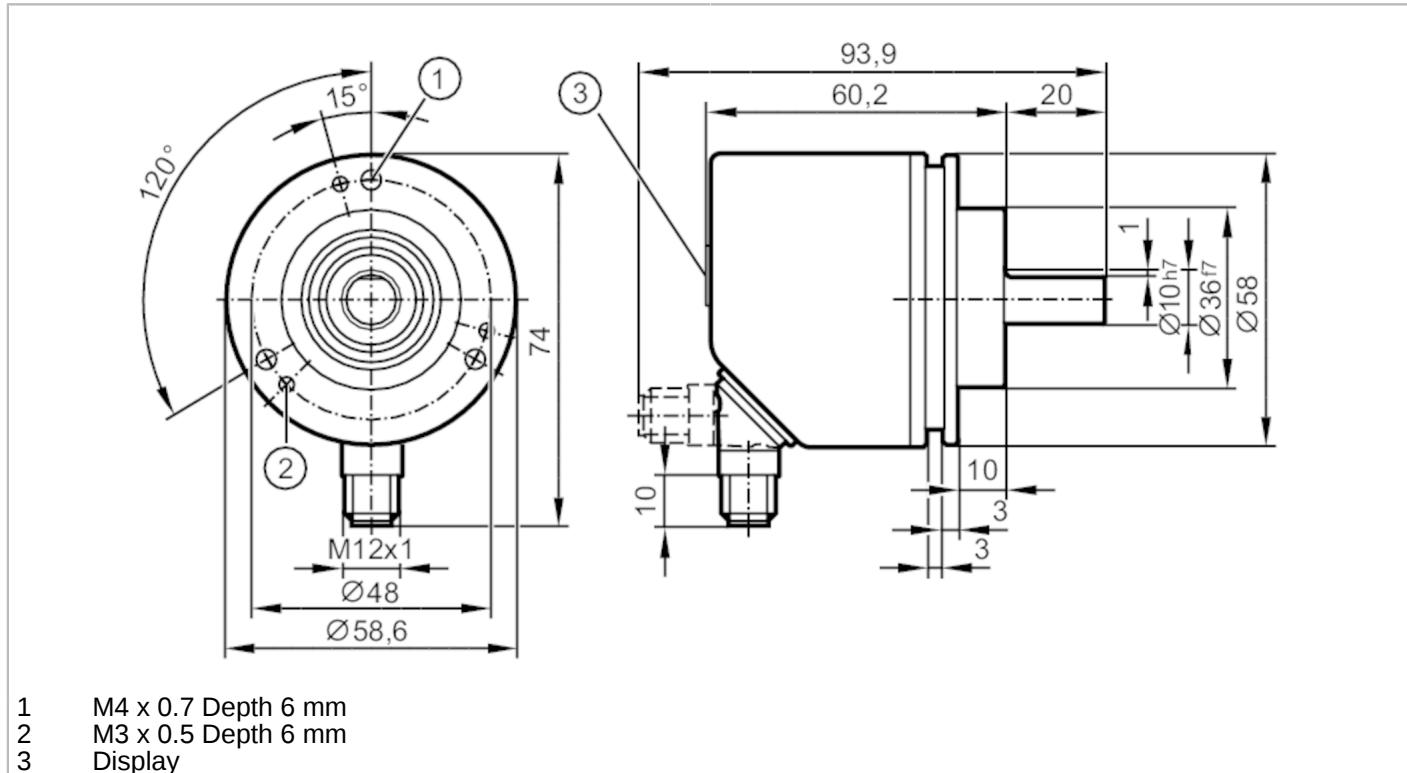

### Product characteristics

Resolution	1...10000; (configurable; Factory setting: 1024) resolution
Communication interface	IO-Link
Shaft design	solid shaft
Shaft diameter [mm]	10
<b>Application</b>	
Function principle	incremental
Detection system	magnetic
Application	encoder; Speed monitor; Counter

### Electrical data

Operating voltage [V]	4.75...30 DC
Current consumption [mA]	< 350
Protection class	III
Reverse polarity protection	yes
Max. revolution electrical [U/min]	12000

### Outputs

Electrical design	HTL/TTL
Switching frequency [kHz]	1000
Factory setting	Output function: HTL (50 mA)
Short-circuit protection	yes
Phase difference A und B [°]	90

# RVP510



## Incremental encoder with solid shaft and display

INCREMENTAL ENCODER PERFORMANCE LINE

Measuring/setting range		
Resolution		1...10000; (configurable; Factory setting: 1024) resolution
Speed monitor		
Set point SP	[U/min]	-9994...9999
Set point SP	[Hz]	-166.6...166.7
Reset point rP	[U/min]	-9999...9994
Reset point rP	[Hz]	-166.7...166.6
Counter		
Preset point		1...9999
Accuracy / deviations		
Accuracy	[°]	0.1
Software / programming		
Parameter setting options		encoder; Resolution; Direction of rotation; HTL; TTL; Speed monitor; Resolution
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SIO mode		yes
Min. process cycle time	[ms]	2.3
Operating conditions		
Ambient temperature	[°C]	-40...85
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	95; (Condensation not permissible)
Protection		IP 65; (on the housing: IP 67; on the shaft: IP 64)
Tests / approvals		
Shock resistance		100 g
Vibration resistance		20 g
MTTF	[years]	218

# RVP510



## Incremental encoder with solid shaft and display

INCREMENTAL ENCODER PERFORMANCE LINE

Mechanical data		
Weight	[g]	443
Dimensions	[mm]	Ø 58 / L = 80.2
Material		flange: aluminum; housing: stainless steel (1.4521 / 444); plug: stainless steel (1.4401 / 316); display window: PEI
Max. revolution, mechanical [U/min]		12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	10
Shaft material		stainless steel
Max. shaft load axial (at the shaft end)	[N]	40
Max. shaft load radial (at the shaft end)	[N]	60
Fixing flange		Clamping flange
Displays / operating elements		
Display		10-segment display, red/green 4-digit configurable 2 x LED, yellow 5 x LED, green
Electrical connection		
IO-Link		
1		L+
2		not to be used
3		L-
4		IO-Link
5		not to be used
6		not to be used
7		not to be used
8		not to be used
screen		plug
encoder		
1		UB
2		A
3		GND
4		Z/0-Pulse (90 deg)
5		B
6		A-
7		B-
8		Z-
screen		plug

# RVP510



## Incremental encoder with solid shaft and display

INCREMENTAL ENCODER PERFORMANCE LINE


### Preset counter

1	UB
2	IN1
3	GND
4	not to be used
5	OUT1
6	not to be used
7	not to be used
8	not to be used
screen	plug

### Speed monitor

1	UB
2	OUT2
3	GND
4	not to be used
5	OUT1
6	OUT2-
7	OUT1-
8	not to be used
screen	plug

Connector: 1 x M12, radial, can also be used axially; Molded body: stainless steel (1.4401 / 316); Maximum cable length: 100 m; (IO-Link: max. 20 m)




## Incremental encoder with solid shaft and display

INCREMENTAL ENCODER PERFORMANCE LINE

### Diagrams and graphs

#### Pulse diagram

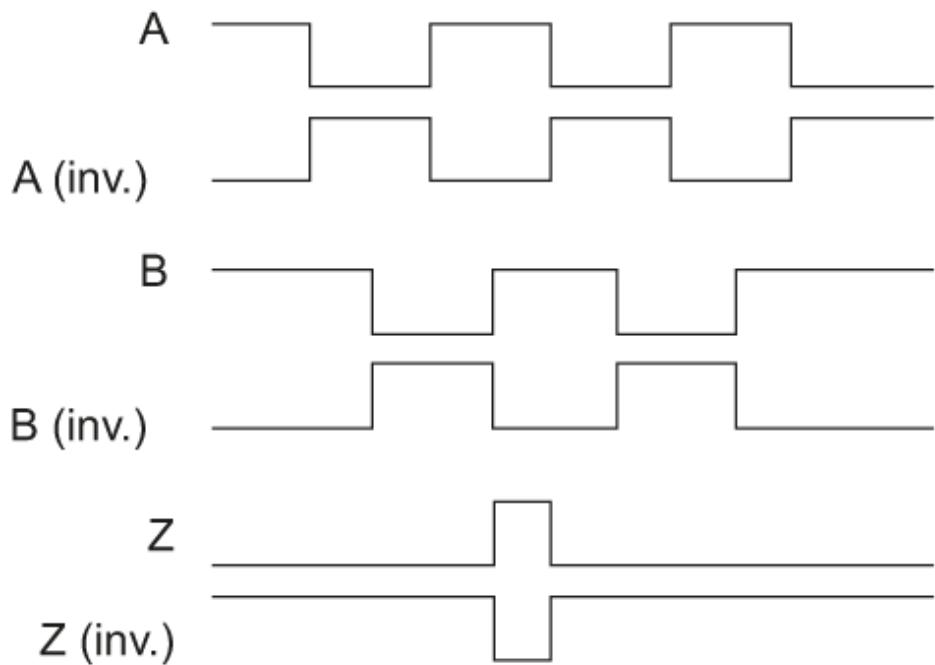

Direction of rotation clockwise (looking at the shaft)