

GCA20

20-Amp, 120-Volt, Automatic Reset, In-Line User-Attachable GFCI Plug, Grounded



UPC Code : 078477371220

Country Of Origin : China

Technical Information

AC Horsepower Ratings

At Rated Voltage : 3/4 Horsepower

Electrical Specifications

Current Interrupting : 2 kA

Trip Level : 5mA plus or minus 1mA

Environmental Specifications

Flammability : Rated V-2 per UL94

Operating Temperature : -35°C to 66°C

Material Specifications

Blades/Contacts : Brass

Body Material : Polycarbonate

Mechanical Specifications

Product ID : Ratings permanently marked on device

Product Features

Amperage : 20 A

Color : Black

Feature : Automatic Reset GFCI

Grounding : GFCI Ground Fault

NEMA : 5-15R

Pole : 2

UL 943 : Class A (GFCI)

Voltage : 120 VAC

Wire : 3

Standards and Certifications

ANSI : C-73

CSA Standard : C22.2 No 144

NEMA : WD-6

NOM : 057

Features and Benefits



- Rainproof, Outdoor rated GFCI Module.
- Fully complies with NEC and OSHA regulations for construction sites.
- Automatically resets to ON when plugged in or after power interruption.
- Power Indicator lamp goes OFF if GFCI trips, power is interrupted or the GFCI is unplugged.
- Open-Neutral Protection immediately trips the GFCI if the neutral conductor on the line side is opened, eliminating the possibility of the GFCI having a live hot leg.
- Specially designed NEMA 3R, Raintight-While-in-Use cover available.
- UL listed; complies with UL Standard 943 as a Class A GFCI power supply.
- CSA Certified.

Patents*

MX265718

US7436639

*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

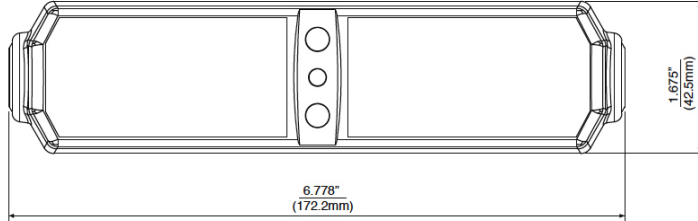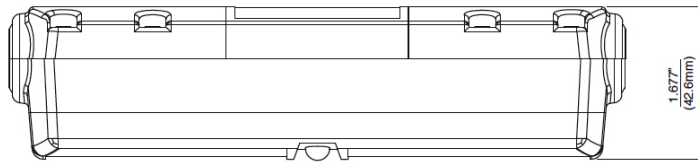

SPECIFICATION SUBMITTAL

JOB NAME:		CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:		<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

