

## GCM20

20-Amp, 120-Volt, Manual Reset, In-Line User-Attachable GFCI Plug, Grounded

Leviton's Automatic Reset GFCI Devices are now sleeker and more rugged than ever! And, while these devices are fully OSHA compliant for use on job sites, they are also perfect for use in a variety of temporary power applications, such as recreation vehicles, marine vehicles, portable pools, portable generators, submersible pumps, vending machines and more.



UPC Code : 078477757505

Country Of Origin : China

### Technical Information

#### AC Horsepower Ratings

**At Rated Voltage** : 3/4 Horsepower

#### Electrical Specifications

**Amperage** : 20 A

**Current Interrupting** : 2 kA

**Grounding** : GFCI Ground Fault

**Pole** : 2

**Short Circuit Current Rating** : 2kA

**Temperature Rise** : Max 30C after 50 cycles OL at 150 percent rated current

**Trip Level** : 5mA plus or minus 1mA

**Voltage** : 120 VAC

**Wire** : 3

#### Environmental Specifications

**Flammability** : Rated V-2 per UL94

**Operating Temperature** : -35C to +66C

#### Material Specifications

**Blades/Contacts** : Brass

**Body Material** : Polycarbonate

**Color** : Yellow

#### Mechanical Specifications

**Cord Type** : Accepts SJ & ST Cord Types

**Product ID** : Ratings marked on device label

**Terminal ID** : Brass-Hot, Green-Ground, Silver-Neutral

#### Product Features

**Color** : Yellow

#### Standards and Certifications

**ANSI** : C-73

**CSA** : C22.2 No.42 & No. 144

**CSA C22.2** : File LR-57811

**NEMA** : WD-6

**NOM** : 057

**UL 498** : File E-48380

**UL 943** : Class A (GFCI)



**Warranty** : 2-Year Limited

### Patents\*

MX265718

US7436639

\*This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

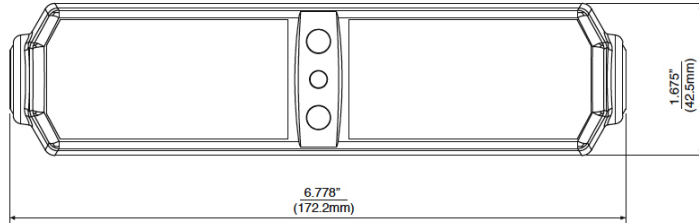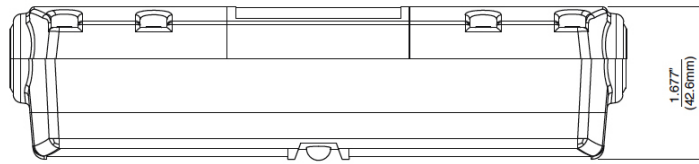

**SPECIFICATION SUBMITTAL**

JOB NAME:		CATALOG NUMBERS:	
<input type="text"/>		<input type="text"/>	<input type="text"/>
JOB NUMBER:		<input type="text"/>	<input type="text"/>

**Leviton Manufacturing Co., Inc.**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · [www.leviton.com/canada](http://www.leviton.com/canada)

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · [www.leviton.com.mx](http://www.leviton.com.mx)

Visit our Website at: [www.leviton.com](http://www.leviton.com)

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/international/contacts/](http://www.leviton.com/international/contacts/)

