

Kellems® Wire Management Products
Strain Relief Grips
Deluxe Cord Grips

HUBBELL

Features

- Aluminum Fitting
- Stainless steel mesh is corrosion resistant
- Neoprene bushing is oil and watertight

Ordering Information

Description	Form Size	UPC	Catalog Number
Straight Male Thread, Liquidtight, for Insulated Cables	F3	783585331089	074011337




Listings

UL Listed
CSA Certified

Specifications

Strand	Stainless Steel
Body	Nylon
Bushing	Neoprene
Nut	Nylon

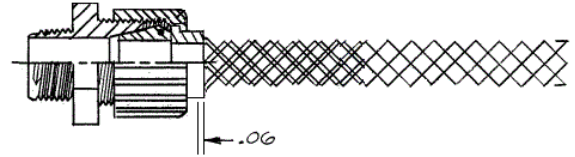

Performance

Environmental	
Flammability	UL 94HB (Strand grip), UL 94V-2(Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C
Operating Temperatures	-40°F to +225°F (-40°C to +107°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

