


Datasheet

RS PRO Cylindrical Male Foot Anti Vibration Mounts

A simple and cost-effective mount using made from natural rubber and Zinc plated mild steel. For use in compression and shear. A Very large range of available size and studs.

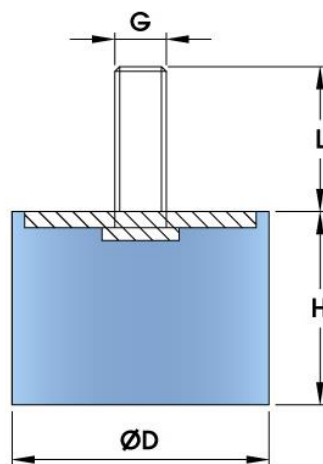

H – Height
D – Diameter
G – Thread Size
L – Thread Length

RS Code (mm)	Rubber Hardness (ShA)	Diameter (mm)	Height (mm)	GxL (mm)	Max Compression Load (KG)
1893239	45	16	10	M4x10	9.2
1893248	60	16	15	M4x10	13.3
1893233	60	16	20	M4x10	10
1893272	60	20	8	M6x18	48
1893297	60	20	12	M6x18	28.1
1893256	60	25	15	M6x18	43.2
1893236	60	30	17	M8x16	67
1893218	60	30	20	M8x20	60
1893198	60	30	40	M8x20	50.8
1893260	45	40	20	M8x20	63.2
1893277	60	40	27	M8x23	108
1893323	45	40	30	M8x23	48.1
1893317	45	40	35	M8x23	46
1893296	60	50	20	M10x25	230.6
1893202	70	50	45	M10x25	102
1893209	70	75	30	M12x37	834