

AMP-METRIMATE TE Internal #: 6-390376-1 AMP-METRIMATE, SO DIMM Sockets, Small Outline (SO), Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board

View on TE.com >

Connectors > Socket Connectors > Memory Sockets > SO DIMM Sockets > DDR3 SO DIMM SOCKETS



DRAM Type: Small Outline (SO) Stack Height: 5.2 mm [.205 in] Module Orientation: Right Angle PCB Mounting Style: Surface Mount Connector System: Cable-to-Board

All DDR3 SO DIMM SOCKETS (14)



Features

Product Type Features

DRAM Type	Small Outline (SO)
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Product Type	Socket
Configuration Features	
Number of Bays	2
Center Key	Offset Left
Number of Keys	
	1
Module Orientation	1 Right Angle
	1 Right Angle 144

AMP-METRIMATE, SO DIMM Sockets, Small Outline (SO), Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board



Electrical Characteristics

DRAM Voltage	3.3 V
Body Features	
Ejector Location	None
Latch Material	Stainless Steel
Latch Plating Material	Tin
Module Key Type	DRAM
Connector Profile	Low
Contact Features	
Socket Style	SO DIMM
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Socket Type	Memory Card
Termination Features	
Insertion Style	Cam-In

Mechanical Attachment

PCB Mount Retention	With
PCB Mount Retention Type	Solder Tail
PCB Mounting Style	Surface Mount
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	.8 mm[.031 in]
Housing Color	Natural
Housing Material	High Temperature Plastic
Housing Material Dimensions	High Temperature Plastic
	High Temperature Plastic 5.2 mm[.205 in]
Dimensions	
Dimensions Stack Height	5.2 mm[.205 in]
Dimensions Stack Height Row-to-Row Spacing	5.2 mm[.205 in]

AMP-METRIMATE, SO DIMM Sockets, Small Outline (SO), Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board



Circuit Application	Signal
Industry Standards	
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Method	Box, Tray
Packaging Quantity	270
For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JUN 2020 (209) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Free

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

AMP-METRIMATE, SO DIMM Sockets, Small Outline (SO), Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board





Also in the Series | AMP-METRIMATE

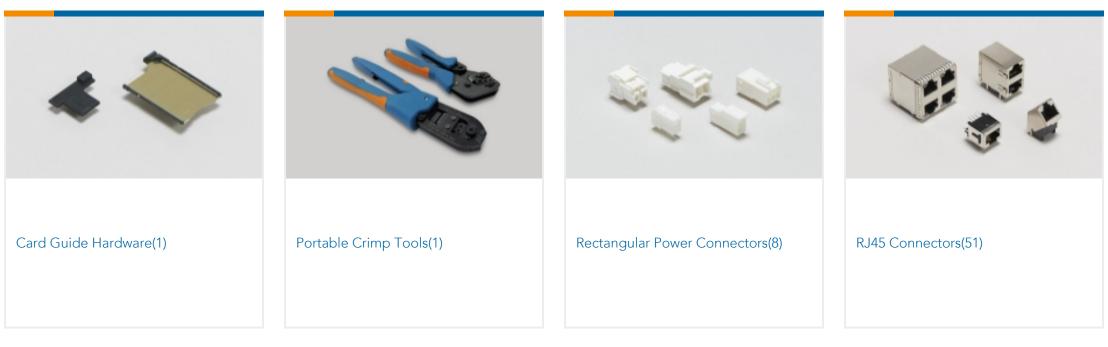






SO DIMM Sockets(14)	Standard Rectangular Connectors(3)

Customers Also Bought

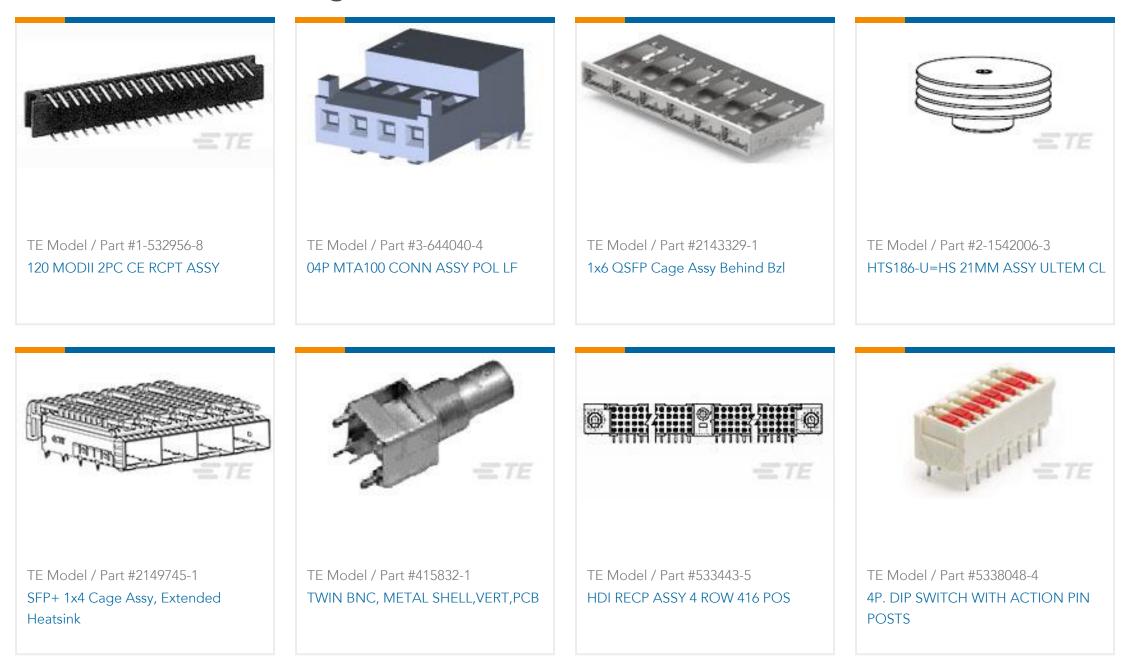

AMP-METRIMATE, SO DIMM Sockets, Small Outline (SO), Stack Height .205 in [5.2 mm], Right Angle Module Orientation, Surface Mount, Cable-to-Board





Documents

Product Drawings SKT,SODIMM,144P,SDRAM3.3V,STD,T&R

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_6-390376-1_H_c-6-390376-1-h.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_6-390376-1_H_c-6-390376-1-h.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_6-390376-1_H_c-6-390376-1-h.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance

TE Material Declaration

English