TE Internal #: 1-5179029-0

PCB Mount Header, Vertical, Board-to-Board, 200 Position, .8mm [. 031in] Centerline, Gold, Printed Circuit Board, .5A Contact Current

Rating (Max)

View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > Board-to-Board Headers & Receptacles



PCB Connector Assembly Type: PCB Mount Header

PCB Mount Orientation: Vertical
Connector System: Board-to-Board

Number of Positions: 200

Centerline (Pitch): .8 mm [ .031 in ]

#### **Features**

#### Product Type Features

PCB Connector Assembly Type	PCB Mount Header
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Rows	2
Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	200
Board-to-Board Configuration	Parallel
Electrical Characteristics	
Dielectric Withstanding Voltage (Max)	500 VAC
Insulation Resistance	2 ΜΩ
Operating Voltage	100 VAC



#### **Contact Features**

Contact Layout	Inline
PCB Contact Termination Area Plating Material Thickness	2 μm[78.74 μin]
Mating Tab Width	.4 mm[.016 in]
Mating Tab Thickness	.2 mm[.008 in]
PCB Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Finish	Matte
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Brass
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.2 μm[8 μin]
Contact Type	Tab
Contact Current Rating (Max)	.5 A

#### **Termination Features**

Rectangular Termination Post & Tail Thickness	.2 mm[.008 in]
Rectangular Termination Post & Tail Width	.25 mm[.01 in]
Termination Method to Printed Circuit Board	Surface Mount

## Mechanical Attachment

PCB Mount Alignment Type	Positioning Bosses
Locating Post Length	.5 mm[.02 in]
Mating Alignment	With
Mating Alignment Type	Polarization
PCB Mount Retention	Without
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

## **Housing Features**

Mating Entry Location	Тор
Centerline (Pitch)	.8 mm[.031 in]
Housing Color	Natural
Housing Material	Matte

## Dimensions

Connector Height	6 mm[.236 in]
Commoded Froight	0 mm.[.200 m]



Stack Height	6 mm, 10 mm, 14 mm, 18 mm[.236 in][.394
	in][.551 in][.709 in]

#### **Usage Conditions**

Housing Temperature Rating	High
Operating Temperature Range	-40 - 125 °C, -40 - 125 °C[-40 - 257 °F][-40 - 257 °F]

#### Operation/Application

Assembly Process Feature	None
Circuit Application	Signal
Industry Standards	

## **Packaging Features**

	.5 in
Packaging Quantity	5
Packaging Method	Box & Tube, Tube

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2020 (205) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 260°C


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous




materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


## Compatible Parts

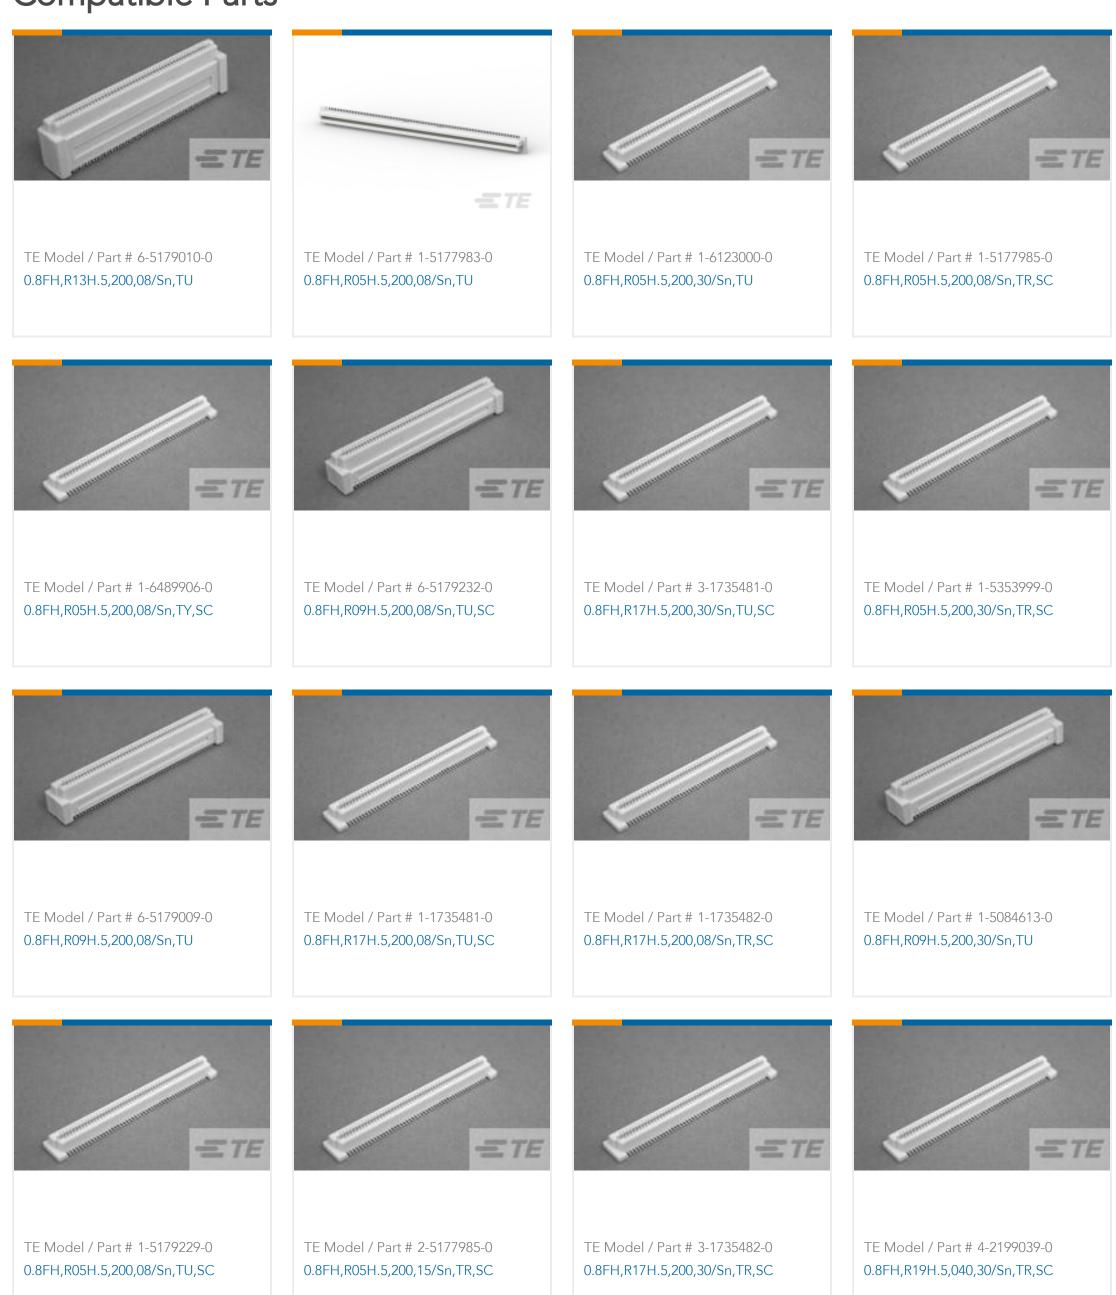



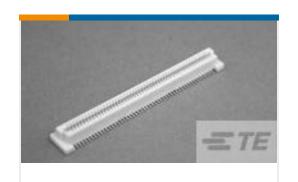

TE Model / Part # 6-1735480-0 0.8FH,R17H.5,200,08/Sn,TU

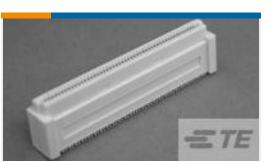

TE Model / Part # 6-5179233-0 0.8FH,R13H.5,200,08/Sn,TU,SC



TE Model / Part # 6-6123212-0 0.8FH,R13H.5,200,30/Sn,TU




TE Model / Part # 7-6123212-0 0.8FH,R13H.5,200,30/Sn,TU,SC

# Customers Also Bought



TE Model / Part #1-5177983-0 0.8FH,R05H.5,200,08/Sn,TU

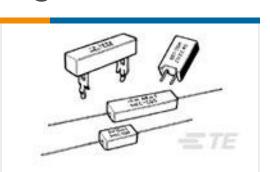

TE Model / Part #1623785-7 SQM10 75R 5% (WIRE)



TE Model / Part #2176304-5 RP 1E 0.1W 11R 0.1% 25PPM 5K RL




TE Model / Part #1-5177985-0 0.8FH,R05H.5,200,08/Sn,TR,SC



TE Model / Part #4-1393779-5 V23101D1106B301



TE Model / Part #5177985-8 0.8FH,R05H.5,160,08/Sn,TR,SC

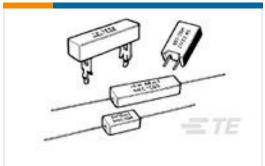

TE Model / Part #1-1623782-9 SQM5 3K3 5% (METAL FILM)



TE Model / Part #5-770174-0 04P MINI-UMNL ASSY V0 SNNI BLK



### **Documents**

Product Drawings 0.8FH,P06H.5,200,08/Sn,TU

English

**CAD Files** 

3D PDF

3D

Customer View Model
ENG\_CVM\_CVM\_1-5179029-0\_B.2d\_dxf.zip



English

**Customer View Model** 

ENG\_CVM\_CVM\_1-5179029-0\_B.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1-5179029-0\_B.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

#### Datasheets & Catalog Pages

Fine Pitch Stacking Connectors - 0.8mm Free Height (FH) Connectors

English

**Product Specifications** 

**Product Specification** 

English

**Product Specification** 

English