2-2331743-1 ACTIVE

Dynamic Series | Dynamic 2000 Series

TE Internal #: 2-2331743-1

Dynamic 2000 Series, PCB Terminal Blocks, Receptacle, Wire-to-Board, 4 Position, 7.5mm [.295in] Centerline, 1 Row, Side Wire Entry

Angle

View on TE.com >



Connectors > Terminal Blocks & Strips > PCB Terminal Blocks











Terminal Block Connector Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 7.5 mm [.295 in]

Number of Rows: 1

Features

Product Type Features

Block Type	Standard
Terminal Block Connector Type	Receptacle
Connector System	Wire-to-Board
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	4
Number of Rows	1
Wire Entry Angle	Side
Electrical Characteristics	
Current Rating (Max)	12.7 A
Voltage Rating	300 VAC
Body Features	
Interlock	With



Contact Features

Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Thickness	.38 µm
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	12.7 A
Mechanical Attachment	

Mating Angle	180°
Screwless Terminal Block	Yes
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Color	Black
Housing Material	Thermoplastic
Centerline (Pitch)	7.5 mm[.295 in]

Dimensions

Wire Size	$.32 - 2.1 \text{ mm}^2$

Usage Conditions

Operating Temperature Range	-30 - 105 °C[-22 - 221 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Method	Tray	
------------------	------	--

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2020 (205) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.



Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | Dynamic 2000 Series

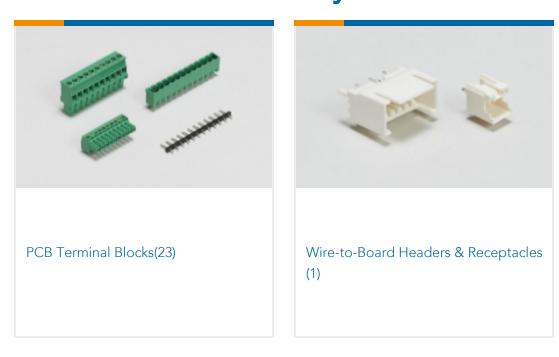

Customers Also Bought












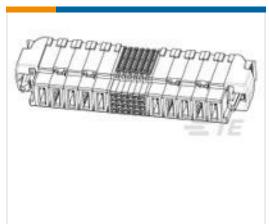

TE Model / Part #1600798-4 STR RECEPT ASSY MBXL W/KEYS 4P



TE Model / Part #T1430161000-000 H16B-ADM-BO



TE Model / Part #1-2271457-4 D3950 HDR 4POS 1ROW X KEY





TE Model / Part #1-2331743-4 D3950 REC 4POS 1ROW X KEY MARKED



Documents

Product Drawings

D3950 REC 4POS 1ROW Y KEY

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-2331743-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-2331743-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-2331743-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Product Specification

English

Product Environmental Compliance

TE Material Declaration

English

Instruction Sheets

Instruction Sheet (non U.S.)

Dynamic 2000 Series, PCB Terminal Blocks, Receptacle, Wire-to-Board, 4 Position, 7.5 mm [.295in] Centerline, 1 Row, Side Wire Entry Angle



English

Agency Approvals

UL Report

English