


### Product type designation

Product description

### IE FC RJ45 Plug 180 (2x2)

RJ45 data connector

Industrial Ethernet FastConnect RJ45 plug 180 2x 2, RJ45 plug-in connector (10/100 Mbit/s) with rugged metal enclosure and FC connection system, for IE FC Cable 2x 2; 180° cable outlet 1 pack = 1 unit

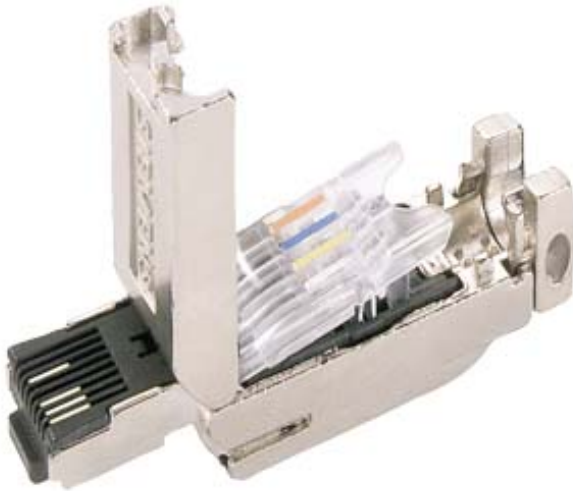

### Suitability for use

For connection to IE FC TP cables 2x2, suitable for fast assembly with the FastConnect system

### Transfer rate

Transfer rate / for Industrial Ethernet

10 Mbit/s, 100 Mbit/s

### Interfaces

Number of electrical connections

- for Industrial Ethernet FC TP cables 4
- for network components or terminal equipment 1

Type of electrical connection

- for Industrial Ethernet FC TP cables integrated cut-and-clamp contacts for 4-wire TP FC installation cable AWG22
- for network components or terminal equipment RJ45 connector

Type of electrical connection / FastConnect

Yes

### Mechanical data

Material / of the enclosure

metal

Number of reuses

10

Locking mechanism design

other

| Design, dimensions and weights  |                   |
|---------------------------------|-------------------|
| Type of cable outlet            | 180° cable outlet |
| Width                           | 13.7 mm           |
| Height                          | 16 mm             |
| Depth                           | 55 mm             |
| Net weight                      | 35 g              |
| Connectable cable cross-section | 6.5 ... 6.5 mm    |

| Ambient conditions   |                |
|--|----------------|
| Ambient temperature  |                |
| <ul style="list-style-type: none"> <li>during operation</li> </ul>   | -40 ... +85 °C |
| <ul style="list-style-type: none"> <li>during storage</li> </ul>   | -40 ... +85 °C |
| <ul style="list-style-type: none"> <li>during transport</li> </ul>   | -40 ... +85 °C |
| Relative humidity  |                |
| <ul style="list-style-type: none"> <li>at 25 °C / without condensation / during operation / maximum</li> </ul> | 95 %           |
| Protection class IP  | IP20           |

| Product features, product functions, product components / general |     |
|---|-----|
| Product feature   |     |
| <ul style="list-style-type: none"> <li>PoE capability</li> </ul>  | Yes |
| <ul style="list-style-type: none"> <li>PoE+capability</li> </ul>  | Yes |
| <ul style="list-style-type: none"> <li>silicon-free</li> </ul>    | Yes |
| Product component   |     |
| <ul style="list-style-type: none"> <li>strain relief</li> </ul>   | Yes |

| Standards, specifications, approvals  |      |
|---|------|
| Certificate of suitability  |      |
| <ul style="list-style-type: none"> <li>RoHS conformity</li> </ul>                                 | Yes  |
| <ul style="list-style-type: none"> <li>UL approval</li> </ul>                                     | Yes  |
| <ul style="list-style-type: none"> <li>cULus approval</li> </ul>                                  | Yes  |
| <ul style="list-style-type: none"> <li>Railway application in accordance with EN 50155</li> </ul> | No   |
| Standard for structured cabling   | Cat5 |

| Further information / Internet-Links  |   |
|---|---|
| Internet-Link   |   |
| <ul style="list-style-type: none"> <li>to website: Selector SIMATIC NET SELECTION TOOL</li> </ul> | <a href="http://www.siemens.com/snst">http://www.siemens.com/snst</a>                               |
| <ul style="list-style-type: none"> <li>to website: Industrial communication</li> </ul>            | <a href="http://www.siemens.com/simatic-net">http://www.siemens.com/simatic-net</a>                 |
| <ul style="list-style-type: none"> <li>to website: Industry Mall</li> </ul>                       | <a href="https://mall.industry.siemens.com">https://mall.industry.siemens.com</a>                   |
| <ul style="list-style-type: none"> <li>to website: Information and Download Center</li> </ul>     | <a href="http://www.siemens.com/industry/infocenter">http://www.siemens.com/industry/infocenter</a> |
| <ul style="list-style-type: none"> <li>to website: Image database</li> </ul>                      | <a href="http://automation.siemens.com/bilddb">http://automation.siemens.com/bilddb</a>             |
| <ul style="list-style-type: none"> <li>to website: CAx Download Manager</li> </ul>                | <a href="http://www.siemens.com/cax">http://www.siemens.com/cax</a>                                 |
| <ul style="list-style-type: none"> <li>to website: Industry Online Support</li> </ul>             | <a href="https://support.industry.siemens.com">https://support.industry.siemens.com</a>             |

last modified:

07/13/2020