



Datasheet

Stock No. 102-6130

Battery Voltage Relay




ENGLISH



- ❑ ***NEW*** 17.5mm DIN rail housing
- ❑ Microprocessor based
- ❑ Suited to 12V and 24V batteries
- ❑ Monitors own supply and detects and Under voltage condition
- ❑ Adjustment for Under voltage trip level (9 – 28V)
- ❑ Adjustment for Time delay (from an Under voltage condition)
- ❑ 1 x SPDT relay output 8A
- ❑ Green LED indication for supply status
- ❑ Red LED indication for relay status

FUNCTION DIAGRAM

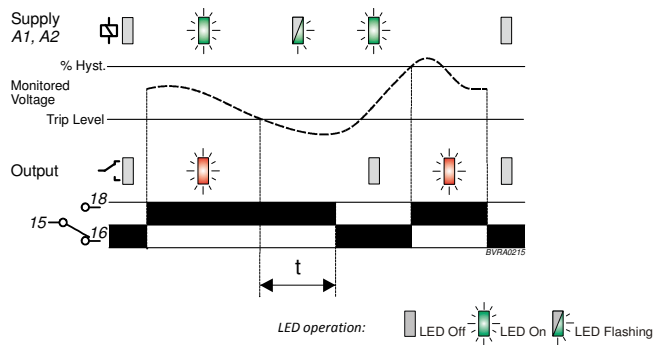

INSTALLATION AND SETTING



Installation work must be carried out by qualified personnel.

- BEFORE INSTALLATION, ISOLATE THE SUPPLY.
- Connect the unit as required taking note of the polarity of the connections. Terminal **A1** is the positive connection and **A2** the negative.

Setting the unit.

- Set the Under voltage "Trip Level (V)" ④ adjustment to the voltage required.
- Set the "Delay (t)" ③ to minimum.

Applying power.

- Apply power and the green "Power supply" ① and red "Relay" ② LED's will illuminate, the relay will energise and contacts 15 and 18 will close. Refer to the troubleshooting table if the unit fails to operate correctly.
- If the supply voltage drops below the trip level setting, the green LED will start to flash. The relay will then de-energise (contacts 15 and 18 open) after the delay period "t" and the red LED will extinguish. The green LED will then remain permanently lit.
- When the voltage increases above the trip level + hysteresis, then relay will re-energise and red LED illuminate.

Troubleshooting.

The table below shows the status of the unit during a fault condition.

Supply fault	Green LED	Red LED	Relay
No supply	Off	Off	De-energised
Under voltage condition (during timing)	Flashing	On	Energised for set delay (t)
Under voltage condition (after timing)	On	Off	De-energised

TECHNICAL SPECIFICATION

Supply/monitoring voltage	12 – 24V DC		
U (A1, A2):	75 – 125% U		
Supply variation:	75 – 125% U		
Power consumption (max.):	3W		
Monitoring mode:	Under voltage		
Trip level:	9 – 28V DC		
Hysteresis:	≈ 5% of trip level (factory set)		
Setting accuracy:	± 10%		
Repeat accuracy:	± 0.5% at constant conditions		
Response time:	≈ 100ms		
Time delay (t):	0 – 30 Sec. (± 5%)		
	<i>Note: actual delay (t) = adjustable delay + response time</i>		
Power on delay (Td):	≈ 1 sec. (worst case = Td x 2)		
Power on indication:	Green LED		
Relay status indication:	Red LED		
Ambient temp:	-20 to +60°C		
Relative humidity:	+95%		
Output (15, 16, 18):	SPDT relay		
Output rating:	AC1	250V 8A (2000VA)	
	AC15	250V 5A (no), 3A (nc)	
	DC1	25V 8A (200W)	
Electrical life:	≥ 150,000 ops at rated load		
Dielectric voltage:	2kV AC (rms) IEC 60947-1		
Rated impulse withstand voltage:	4kV (1.2/50µs) IEC 60664		
Housing:	Orange flame retardant UL94		
Weight:	70g		
Mounting option:	On to 35mm symmetric DIN rail to BS EN 60715 or direct surface mounting via 2 x M3.5 or 4BA screws using the black clips provided on the rear of the unit.		
Terminal conductor size	≤ 2 x 2.5mm ² solid or stranded		


Approvals:



IND. CONT. EQ. E111187


Conforms to IEC, CE, and RoHS Compliant.
EMC: Immunity/Emissions to EN 61000-6

CONNECTION DIAGRAM



SETTING DETAILS

1. Power supply status (Green) LED
2. Relay output status (Red) LED
3. "Delay" adjustment
4. "Under" trip level adjustment



DIMENSIONS

