


# TIMKEN

The Timken Company  
 4500 Mt Pleasant St. NW  
 N. Canton, OH 44720  
 Phone: (234) 262-3000  
 E-Mail: CustomerCAD@timken.com • Web site: www.timken.com

## Timken Part Number 09067 - 09195, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

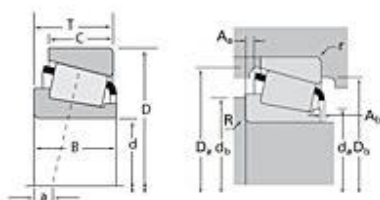

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

### Specifications

<b>Series</b>	09000
<b>Cone Part Number</b>	09067
<b>Cup Part Number</b>	09195
<b>Design Units</b>	Imperial
<b>Bearing Weight</b>	0.4 lb 0.200 Kg
<b>Cage Type</b>	Stamped Steel

### Dimensions

<b>d - Bore</b>	0.7500 in 19.050 mm
<b>D - Cup Outer Diameter</b>	1.9380 in 49.225 mm

<b>B - Cone Width</b>	0.7500 in 19.050 mm
<b>C - Cup Width</b>	0.5625 in 14.288 mm
<b>T - Bearing Width</b>	0.7100 in 18.034 mm

#### Abutment and Fillet Dimensions

<b>R - Cone Backface "To Clear" Radius<sup>1</sup></b>	0.050 in 1.270 mm
<b>r - Cup Backface "To Clear" Radius<sup>2</sup></b>	0.050 in 1.27 mm
<b>da - Cone Frontface Backing Diameter</b>	0.94 in 23.88 mm
<b>db - Cone Backface Backing Diameter</b>	1.00 in 25.40 mm
<b>Da - Cup Frontface Backing Diameter</b>	1.79 in 44.50 mm
<b>Db - Cup Backface Backing Diameter</b>	1.65 in 41.91 mm
<b>Ab - Cage-Cone Frontface Clearance</b>	0.08 in 2 mm
<b>Aa - Cage-Cone Backface Clearance</b>	-0.01 in -0.3 mm
<b>a - Effective Center Location<sup>3</sup></b>	-0.29 in -7.40 mm

#### Basic Load Ratings

<b>C90 - Dynamic Radial Rating (90 million revolutions)<sup>4</sup></b>	2500 lbf 11100 N
<b>C1 - Dynamic Radial Rating (1 million revolutions)<sup>5</sup></b>	9630 lbf 42800 N
<b>C0 - Static Radial Rating</b>	9100 lbf 40500 N
<b>C<sub>a90</sub> - Dynamic Thrust Rating (90 million revolutions)<sup>6</sup></b>	1140 lbf 5050 N

## Factors

<b>K - Factor<sup>7</sup></b>	2.2
<b>e - ISO Factor<sup>8</sup></b>	0.27
<b>Y - ISO Factor<sup>9</sup></b>	2.26
<b>G1 - Heat Generation Factor (Roller-Raceway)</b>	8
<b>G2 - Heat Generation Factor (Rib-Roller End)</b>	4.05
<b>Cg - Geometry Factor</b>	0.0452

<sup>1</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>2</sup> These maximum fillet radii will be cleared by the bearing corners.

<sup>3</sup> Negative value indicates effective center inside cone backface.

<sup>4</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values.


<sup>5</sup> Based on  $1 \times 10^6$  revolutions  $L_{10}$  life, for the ISO life calculation method.

<sup>6</sup> Based on  $90 \times 10^6$  revolutions  $L_{10}$  life, for The Timken Company life calculation method.  $C_{90}$  and  $C_{a90}$  are radial and thrust values for a single-row,  $C_{90(2)}$  is the two-row radial value.

<sup>7</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>8</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

<sup>9</sup> These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

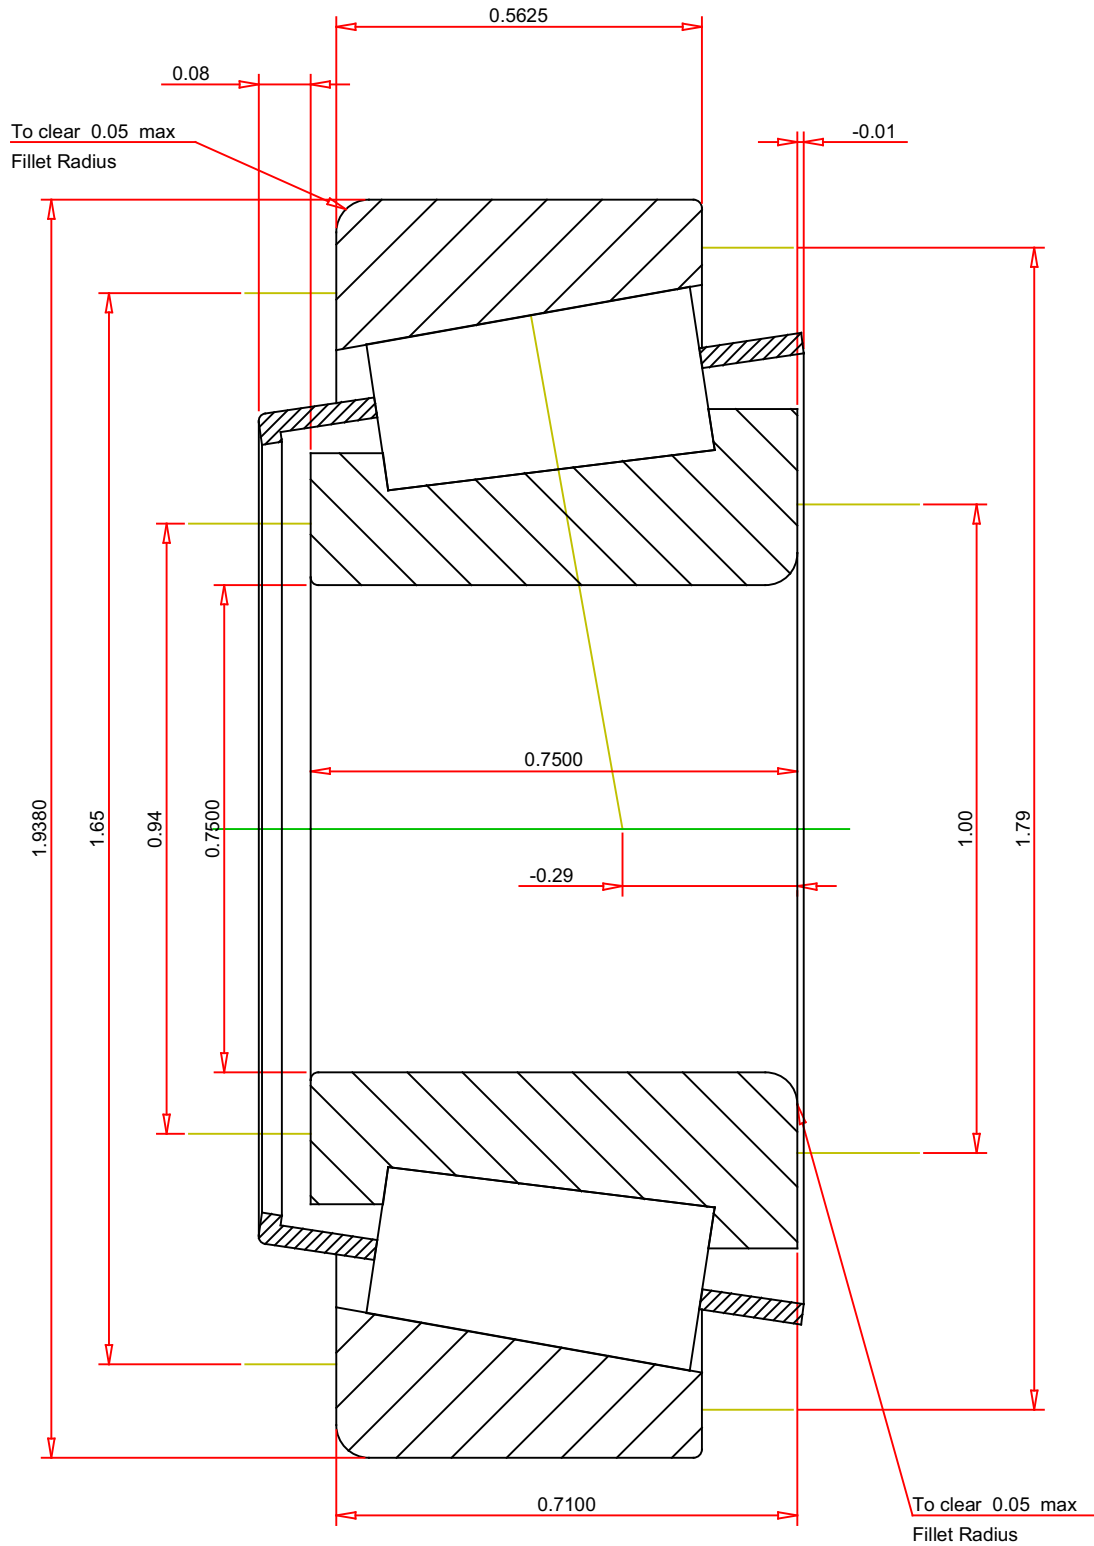

**IMPERIAL UNITS**

ISO Factor - e	0.27
ISO Factor - Y	2.26
Bearing Weight	0.4 lb
Number of Rollers Per Row	12
Effective Center Location	-0.29 inch

**TIMIKEN**®

**THE TIMKEN COMPANY**  
NORTH CANTON, OHIO USA

**09067 - 09195**  
TS BEARING ASSEMBLY

K Factor	2.2
Dynamic Radial Rating - C90	2500 lbf
Dynamic Thrust Rating - Ca90	1140 lbf
Static Radial Rating - C0	9100 lbf
Dynamic Radial Rating - C1	9630 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

**FOR DISCUSSION ONLY**