

Hubbellock® Devices
 30A, 600V AC, 20A, 250V DC, 3 Pole, 4 Wire
 Grounding

HUBBELL

Hubbellock® Receptacle

Features

- Spring loaded safety shutter contains arcing when mating or un-mating devices under load
- Spring loaded safety shutter automatically ejects the plug eliminating contact teasing
- Box terminals in conjunction with screws with pressure pads provide maximum termination strength and dependability
- Angled housing reduces the profile of the device and makes mating and un-mating easier
- Metallic weather protective spring loaded cover provides protection from moisture and dust



Ordering Information

Description	Device Color	UPC	Catalog Number
Aluminum angle housing, with 3/4" N P T hub for surface mounting	Metallic	783585017426	HBL21420

Specifications

Housing	Cast Aluminum
Receptacle Interior	Thermoset
Contacts	Bronze
Terminal Screws	Zinc plated steel


Performance

Electrical	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	2,000V minimum

Mechanical	
Terminal Accommodation	#10 AWG - #6 AWG solid or stranded copper wire only.

Terminal Identification	Terminals identified in accordance with UL 498
-------------------------	--

Environmental	
Flammability	UL 94 V0 for Receptacles and Inlets.HB or better for Plugs and Connectors
Moisture Resistance	IP30 Suitability
Operating Temperatures	Maximum Continuous 75°C; Minimum -40°C (w/o impact)

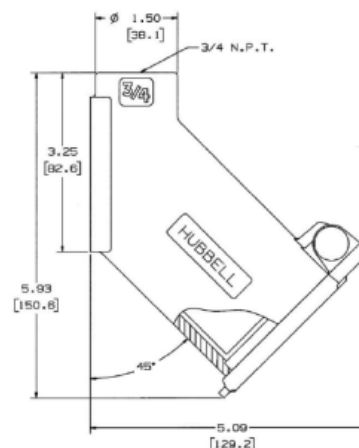

Accessories

Plug	HBL21415B
------	-----------

Resources

Customer Use Drawing
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

